



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Chip Inductor, CIH Series

## High Frequency Type



### Feature

- Lowest value of specific resistivity, good property of Q and high SRF.
- Possible to use at range above 100MHz
- Monolithic structure for high reliability.


### Application

- Mobile communication systems, noise suppression at high frequency and Impedance matching.

CIH Series has dielectric material and 100% Ag as an internal conductor Therefore, it has high Q and |Z| at high frequency. It is possible to use for high frequency over 100MHz.

Operating Temp	-55~+125°C
Storage Temp	-10~+40°C

### Dimensions

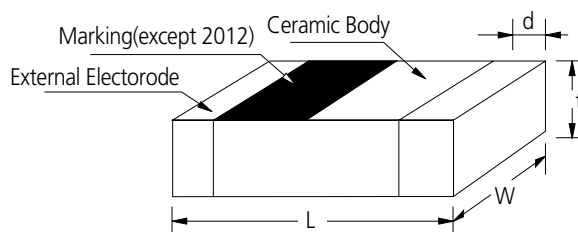

Unit : mm

SIZE CODE	L	W	t	d
03	0.6±0.03	0.3±0.03	0.3±0.03	0.15±0.05
05	1.0±0.05	0.5±0.05	0.5±0.05	0.25±0.1
10	1.6±0.15	0.8±0.15	0.8±0.15	0.3±0.2

### Part Numbering

**CI H 03 T 12N J N C**  
 (1) (2) (3) (4) (5) (6) (7) (8)

- (1) Chip Inductor
- (2) H: High frequency type
- (3) Dimension
- (4) Material code(T: Dielectric material)
- (5) Inductance(4N7: 4.7nH, 10N: 10nH, R10: 100nH)
- (6) Tolerance(C: ±0.2nH, S: ±0.3nH, J: ±5%, K: ±10%)
- (7) Thickness option(N: Standard, A: Thinner than standard, B: Thicker than standard)
- (8) Packaging(C: paper tape, E: embossed tape)

CIH 0603(0201) Type

Part No.	Inductance (nH)	Q (Min.) 100 MHz	Q (typical) Frequency					SRF- Resonant Frequency (MHz) min	DC resistance ( $\Omega$ ) max	Rated current (mA) Max.
			500MHz	800MHz	1.8GHz	2.0GHz	2.4GHz			
CIH 03T 1N0 □	1.0±0.2nH, 0.3nH	4	17	20	28	30	33	13000	0.14	300
CIH 03T 1N2 □	1.2±0.2nH, 0.3nH	4	16	20	28	30	33	10000	0.14	250
CIH 03T 1N5 □	1.5±0.2nH, 0.3nH	4	15	20	27	29	32	10000	0.18	230
CIH 03T 1N8 □	1.8±0.2nH, 0.3nH	4	15	20	27	29	31	10000	0.19	200
CIH 03T 2N2 □	2.2±0.2nH, 0.3nH	4	15	20	26	28	30	8800	0.22	200
CIH 03T 2N7 □	2.7±0.2nH, 0.3nH	5	15	20	26	28	30	7700	0.25	200
CIH 03T 3N3 □	3.3±0.2nH, 0.3nH	5	15	20	26	28	30	6700	0.30	200
CIH 03T 3N9 □	3.9±0.2nH, 0.3nH	5	15	20	27	29	31	6000	0.30	200
CIH 03T 4N7 □	4.7±0.2nH, 0.3nH	5	15	19	26	28	30	5300	0.40	200
CIH 03T 5N6 □	5.6±0.2nH, 0.3nH	5	15	19	26	27	28	4600	0.40	200
CIH 03T 6N8 □	6.8±5%	5.5	14	18	23	24	25	4100	0.48	150
CIH 03T 8N2 □	8.2±5%	5	14	18	22	23	23	3400	0.55	150
CIH 03T 10N □	10.0±5%	5	14	17	22	22	21	3300	0.63	150
CIH 03T 12N □	12.0±5%	6	14	17	21	21	19	3000	0.70	150
CIH 03T 15N □	15.0±5%	6	13	16	19	18	14	2700	0.80	100
CIH 03T 18N □	18.0±5%	6	13	17	16	14	9	2100	0.90	100
CIH 03T 22N □	22.0±5%	5	13	15	14	11	5	1800	1.2	100
CIH 03T 27N □	27.0±5%	4	12	14	10	7	2	1800	1.8	50
CIH 03T 33N □	33.0±5%	4	12	14	8	5	1	1700	2.1	50
CIH 03T 39N □	39.0±5%	4	12	13	4	1	-	1500	2.4	50
CIH 03T 47N □	47.0±5%	4	11	12	2	-	-	1300	2.8	50
CIH 03T 56N □	56.0±5%	4	11	11	-	-	-	1100	3.0	50

□: Tolerance (C: ±0.2nH, S: ±0.3nH, J: ±5%)

\* Test equipment: Agilent E4991A+16196C

**CIH 1005(0402) Type**

Part No.	Inductance (nH) @100MHz	Q (Min) 100MHz	Q (typical.)					SRF (MHz) Min.	DC resistance ( $\Omega$ ) Max.	Rated current (mA) Max.
			500MHz	800MHz	1.8GHz	2.0GHz	2.4GHz			
CIH 05T 1N0 S	1.0±0.3nH	8	23	29	48	50	56	10000	0.12	300
CIH 05T 1N2 S	1.2±0.3nH	8	23	29	48	50	56	10000	0.12	300
CIH 05T 1N5 S	1.5±0.3nH	8	23	29	47	50	56	6000	0.13	300
CIH 05T 1N8 S	1.8±0.3nH	8	20	26	41	43	49	6000	0.14	300
CIH 05T 2N2 S	2.2±0.3nH	8	22	27	44	47	52	6000	0.16	300
CIH 05T 2N4 S	2.4±0.3nH	8	22	27	44	47	52	6000	0.16	300
CIH 05T 2N7 S	2.7±0.3nH	8	22	27	43	45	50	6000	0.17	300
CIH 05T 3N0 □	3.0±10%, 0.3nH	8	24	30	46	48	53	6000	0.19	300
CIH 05T 3N3 □	3.3±10%, 0.3nH	8	24	30	46	48	53	6000	0.19	300
CIH 05T 3N6 □	3.6±10%, 0.3nH	8	24	30	46	48	53	6000	0.19	300
CIH 05T 3N9 □	3.9±10%, 0.3nH	8	22	28	43	45	50	4000	0.22	300
CIH 05T 4N7 □	4.7±10%, 0.3nH	8	23	30	45	47	50	4000	0.24	300
CIH 05T 5N1 □	5.1±10%, 0.3nH	8	22	28	42	43	45	4000	0.27	300
CIH 05T 5N6 □	5.6±10%, 0.3nH	8	22	28	42	43	45	4000	0.27	300
CIH 05T 6N8 □	6.8±5%, 10%	8	22	28	40	41	41	3900	0.32	300
CIH 05T 7N5 □	7.5±5%, 10%	8	22	28	38	38	36	3600	0.37	300
CIH 05T 8N2 □	8.2±5%, 10%	8	22	28	38	38	36	3600	0.37	300
CIH 05T 10N □	10.0±5%, 10%	8	22	28	37	36	31	3200	0.42	300
CIH 05T 12N □	12.0±5%, 10%	8	22	28	33	31	23	2700	0.50	300
CIH 05T 15N □	15.0±5%, 10%	8	22	28	29	26	17	2300	0.55	300
CIH 05T 18N □	18.0±5%, 10%	8	23	28	26	22	11	2100	0.65	250
CIH 05T 22N □	22.0±5%, 10%	8	22	27	21	14	2	1900	0.80	250
CIH 05T 27N □	27.0±5%, 10%	8	20	23	10	3	-	1600	0.90	250
CIH 05T 33N □	33.0±5%, 10%	8	20	23	3	-	-	1300	1.00	250
CIH 05T 39N □	39.0±5%, 10%	8	20	21	-	-	-	1200	1.20	200
CIH 05T 47N □	47.0±5%, 10%	8	19	20	-	-	-	1000	1.30	200
CIH 05T 56N □	56.0±5%, 10%	8	19	18	-	-	-	750	1.40	180
CIH 05T 68N □	68.0±5%, 10%	8	17	15	-	-	-	750	1.40	180
CIH 05T 82N □	82.0±5%, 10%	8	16	11	-	-	-	600	1.60	150
CIH 05T R10 □	100.0±5%, 10%	8	15	9	-	-	-	600	1.60	130

□ : Tolerance (S: ±0.3nH, J: ±5%, K: ±10%)

\* Test equipment: Agilent 4291B+16192A

CIH 1608(0603) Type

Part No.	Inductance (nH) @100MHz	Q (typical)		SRF (MHz) Min.	DC resistance ( $\Omega$ ) Max.	Rated current (mA) Max.
		100MHz	800MHz			
CIH 10T 1N0 S	1.0±0.3nH	8	20	10000	0.05	800
CIH 10T 1N2 S	1.2±0.3nH	8	20	10000	0.05	800
CIH 10T 1N5 S	1.5±0.3nH	8	20	6000	0.10	800
CIH 10T 1N8 S	1.8±0.3nH	8	20	6000	0.10	800
CIH 10T 2N2 S	2.2±0.3nH	8	20	6000	0.10	800
CIH 10T 2N7 S	2.7±0.3nH	10	25	6000	0.10	800
CIH 10T 3N3□	3.3±0.3nH, 10%	10	25	6000	0.12	800
CIH 10T 3N9□	3.9±0.3nH, 10%	10	27	6000	0.14	800
CIH 10T 4N7□	4.7±0.3nH, 10%	10	27	4000	0.16	800
CIH 10T 5N6□	5.6±0.3nH, 10%	10	27	4000	0.18	800
CIH 10T 6N8□	6.8±10%, 5%	10	27	4000	0.22	700
CIH 10T 8N2□	8.2±10%, 5%	10	26	3500	0.24	700
CIH 10T 10N□	10.0±10%, 5%	12	26	3400	0.26	600
CIH 10T 12N□	12.0±10%, 5%	12	24	2600	0.28	600
CIH 10T 15N□	15.0±10%, 5%	12	24	2300	0.32	500
CIH 10T 18N□	18.0±10%, 5%	12	24	2000	0.35	500
CIH 10T 22N□	22.0±10%, 5%	12	25	1600	0.40	500
CIH 10T 27N□	27.0±10%, 5%	12	25	1400	0.45	500
CIH 10T 33N□	33.0±10%, 5%	12	24	1200	0.55	500
CIH 10T 39N□	39.0±10%, 5%	12	20	1100	0.60	400
CIH 10T 47N□	47.0±10%, 5%	12	20	900	0.77	400
CIH 10T 56N□	56.0±10%, 5%	12	20	900	0.75	400
CIH 10T 68N□	68.0±10%, 5%	12	<sup>(1)</sup> 20	700	0.85	350
CIH 10T 82N□	82.0±10%, 5%	12	<sup>(1)</sup> 20	600	0.95	350
CIH 10T R10□	100.0±10%, 5%	12	<sup>(1)</sup> 20	600	1.00	350
CIH 10T R12□	120.0±10%, 5%	<sup>(2)</sup> 8	-	500	1.20	300
CIH 10T R15□	150.0±10%, 5%	<sup>(2)</sup> 8	-	500	1.20	250
CIH 10T R18□	180.0±10%, 5%	<sup>(2)</sup> 8	-	400	1.30	250
CIH 10T R22□	220.0±10%, 5%	<sup>(2)</sup> 8	-	400	1.50	200
CIH 10T R27□	270.0±10%, 5%	<sup>(2)</sup> 8	-	400	1.50	200

□: Tolerance (S: ±0.3nH, J: ±5%, K: ±10%)

\* Test equipment: Agilent 4291B+16192A

<sup>(1)</sup> 500MHz, <sup>(2)</sup> 50MHz,

CIH  
Series