



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CIO-777-PR

Communication link to PLC/SCADA/
monitoring systems

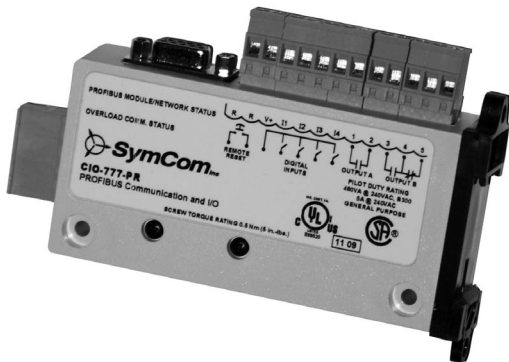


Description

The CIO-777-PR Module is a convenient and cost-effective Profibus interface capable of providing discrete control and monitoring of motor starters, drives and other devices over a Profibus network.

Features & Benefits

FEATURES	BENEFITS
Compact size 3.4" H x 1.0" W x 5.46" D	Easily adapts to existing as well as new applications
Flexible addressing standard allows function as stand-alone interface or in conjunction with 777 series overload relay	Provides flexibility for control and monitoring
Remote reset option	Additional remote reset input allows user to reset 777 series relays without opening the panel
DIN rail or surface mountable	Allows installation flexibility
Built in sub-D connector	Provides a quick and easy connection to a network and reduces field wiring

Wiring Diagram

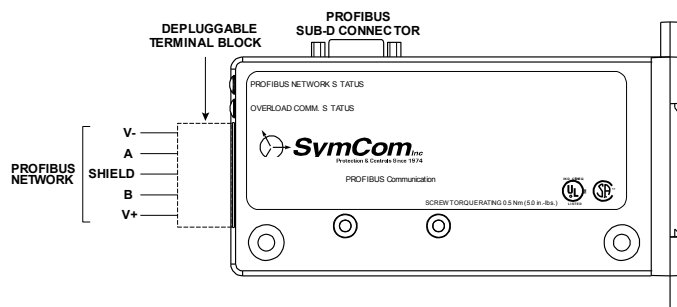

Specifications

Input Characteristics

Power Requirements

Voltage (nominal)	12-24VDC
Current	150mA (max.)
Power	3.6 W (max.)
Digital Inputs	
Voltage Range	12-24VAC
Maximum Current	2mA (typical)
Remote Reset	24VDC, 10mA, (min.), NO pushbutton

Output Characteristics

Form A & Form C Contactors

Pilot Duty	480VA @ 240VAC, B300
General Purpose	5A @ 240VAC

General Characteristics

Ambient Temperature Range	
Operating	-20° to 70°C (-4° to 158°F)
Storage	-40° to 80°C (-40° to 176°F)
Relative Humidity	10-95%, non-condensing per IEC 68-2-3
Wire Gauge	Solid or stranded, 12-20 AWG
Terminal Torque	3 in.-lbs.
Hi-Potential Test (relays to other circuits)	Meets UL508 (2 x rated V + 1000V for 1 min.)

EMC Standards

Electrostatic Discharge (ESD)	IEC 61000-4-2, Level 3, 6kV contact, 8kV air
Radio Frequency Immunity, Radiated	150 MHz, 10V/m
Fast Transient Burst	IEC 61000-4-4, Level 3, 4kV input power
Safety Marks	
UL, ULC Listed	UL508 (File #E68520)
CSA	C22.2 (File #46510)
Enclosure	Polycarbonate
Dimensions	H 86.36 mm (3.4"); W 25.4 mm (1.0"); D 138.68 mm (5.46") (w/depluggable connectors) 0.25 lb. (4 oz., 113.4 g) (w/depluggable connectors)
Weight	
Mounting Methods	DIN Rail or surface mount (w/ two #8 screws)