



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## T-1 and T-1 3/4 Blue LED Lamps

### Description and Features

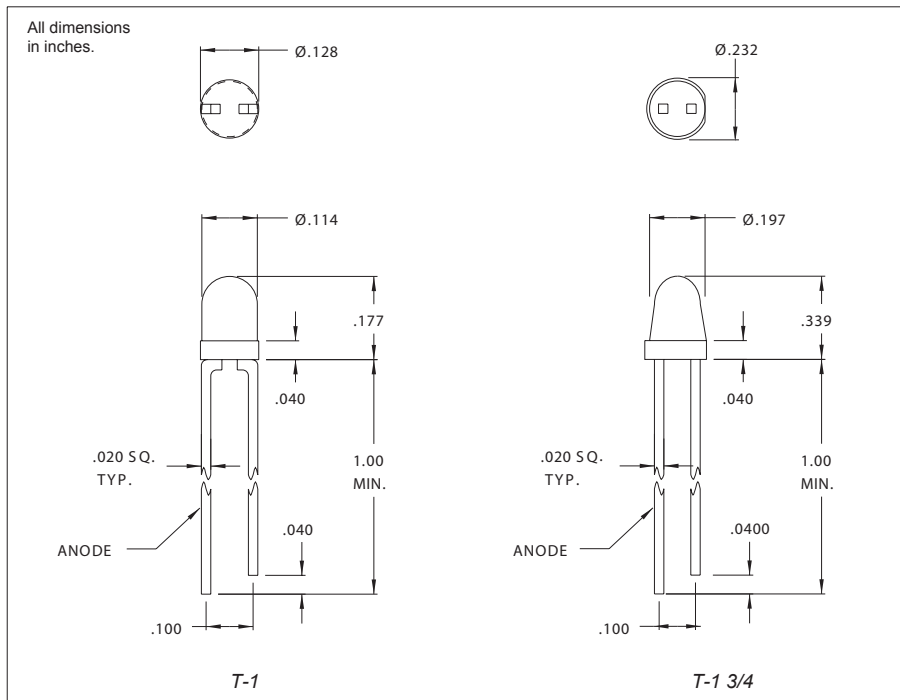

These revolutionary new LED lamps emit a true blue color (430 nm) for those design engineers looking for that fourth status color. Lamps are manufactured with state of the art Silicon Carbide (SiC) technology.

LED lamps are available in both T-1 and T-1 3/4 package sizes, in both diffused and non-diffused lens types.

## Electro-Optical Characteristics and Ratings

PART NUMBER	T-1		T-1 3/4	
	CMD264UBD	CMD264UBC	CMD383UBC/H2	CMD383UBC
Output Color	Blue	Blue	Blue	Blue
Diffusion	Diffused	Non-Diffused	Non-Diffused	Non-Diffused
Package Color	Blue	Clear	Clear	Clear
Test Current (mA)	20	20	20	20
Forward Voltage Typ. (V)	4.9	4.9	4.9	4.9
Forward Voltage Max. (V)	5.5	5.5	5.5	5.5
Luminous Intensity Min. (mcd)	63	160	250	600
Luminous Intensity Typ. (mcd)	100	250	350	800
Luminous Intensity Max. (mcd)	-	-	-	-
Peak Wavelength (nm)	430	430	430	430
Viewing Angle 2 $\theta$ 1/2 (degrees)	45	30	24	12
Power Dissipation (mW)	98	98	98	98
Operating Temperature ( $^{\circ}$ C)	-20 to +80	-20 to +80	-20 to +80	-20 to +80
Storage Temperature ( $^{\circ}$ C)	-20 to +80	-20 to +80	-20 to +80	-20 to +80
Peak Forward Current Max. (1 $\mu$ s @ 10% duty cycle) (mA)	100	100	100	100
Reverse Voltage (IR=100 $\mu$ A) (V)	5	5	5	5
Lead Solder Time @ 260 $^{\circ}$ C	5	5	5	5