



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CMD28-21 Series SMT LEDs

Description and Features

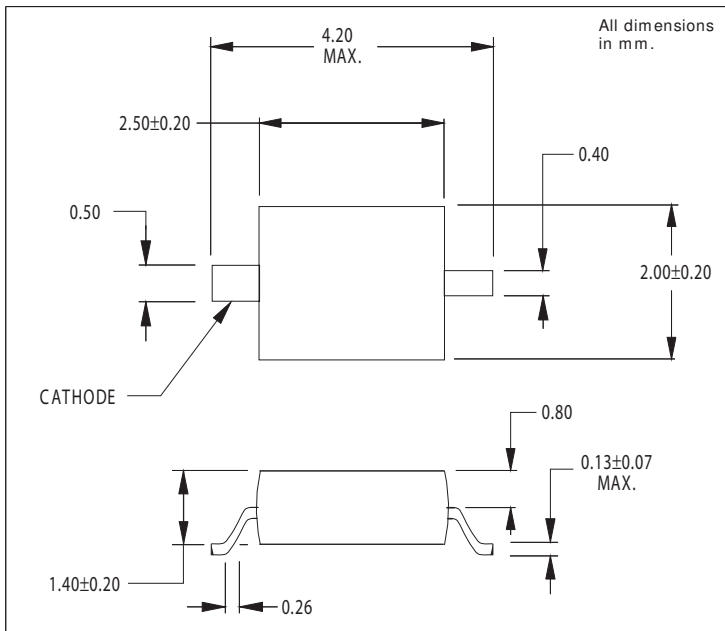

Surface Mount Technology

- Tape and reel packaged for high-speed autoinsertion.
- Convection and vapor-phase reflow compatible.
- Compact form enables high density placement.
- Packaged 2000 pieces per reel.
- RoHS Compliant

Leading Edge LED Optoelectronic Performance

- Consistent high brightness.
- Low current types available.

Exceptional Reliability

- Stringent process controls assure quality.
- Extensive qualification testing to meet strictest requirements.
- Designed to permit easy post-reflow solder joint inspection.

Electro-Optical Characteristics and Ratings

PART NUMBER	CMD28-21VGC/TR8	CMD28-21VYC/TR8	CMD28-21VRC/TR8	CMD2821 VRCTR8T1	CMD2821 VYCTR8T1	CMD2821 VGCTR8T1
Output Color	Green	Yellow	Red	H.E. Red	Yellow	Green
Package Type	Single	Single	Single	Single	Single	Single
Package Color	Clear	Clear	Clear	Clear	Clear	Clear
Test Current (mA)	20	20	20	1	1	1
Forward Voltage Typ. (V)	2.1	2.0	2.0	2.0	2.1	2.1
Forward Voltage Max. (V)	2.8	2.8	2.8	2.8	2.8	2.8
Luminous Intensity Min. (mcd)	1.0	3.5	1.5	0.1	0.25	0.1
Luminous Intensity Typ. (mcd)	5.5	6.0	3.0	0.16	0.4	0.16
Luminous Intensity Max. (mcd)	-	-	-	-	-	-
Peak Wavelength (nm)	570	585	640	640	585	570
Viewing Angle 2θ 1/2 (degrees)	150	150	150	150	150	150
Power Dissipation (mW)	105	105	100	105	105	105
Operating Temperature (°C)	-40 to +85	-40 to +85	-40 to +85	-40 to +85	-40 to +85	-40 to +85
Storage Temperature (°C)	-40 to +85	-40 to +85	-40 to +85	-40 to +85	-40 to +85	-40 to +85
Peak Forward Current Max. (1 s @ 10% duty cycle) (mA)	150	150	150	150	150	150
Reverse Voltage (IR=100 A) (V)	5.0	5.0	5.0	5.0	5.0	5.0
Lead Solder Time @ 260°C	5	5	5	5	5	5