



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






Chicago Miniature Lighting, LLC

Lighting the world since 1910

T-1 StatusPak™ Circuit Board Indicators

DESCRIPTION AND FEATURES

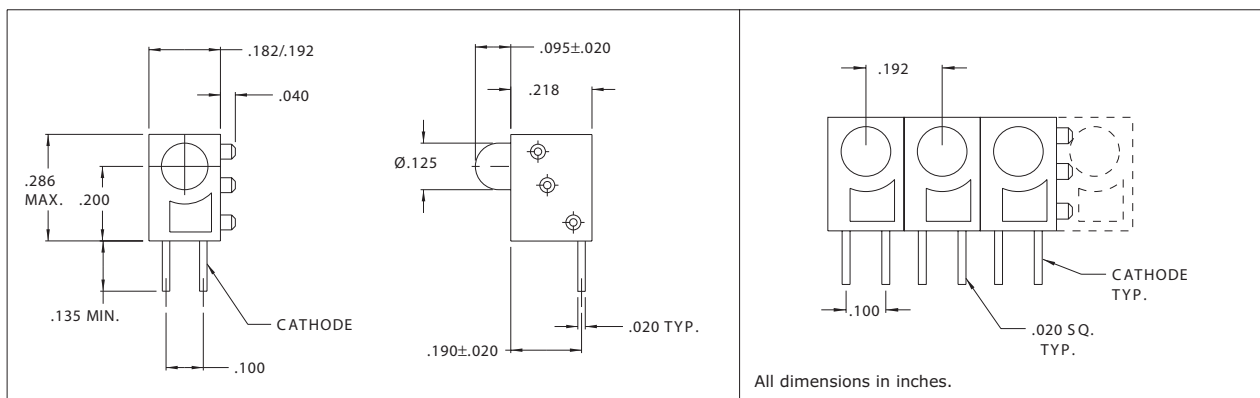

Printed Circuit Board assembly has been made faster and easier than ever before. Now you can mount from one to ten circuit board indicators, as a single unit, in one easy step.

T-1 StatusPak™ is customized to your specification. You choose the number of LEDs, color sequence and position.

StatusPak™ is shipped to you as a complete unit, ready for one-step PC board mounting. Unique snap-together feature allows you to add or take away StatusPak™ modules as needed without any special tooling. StatusPak™ T-1 LEDs are offered in 12 standard types. Nearly 50 more T-1 LED types are available on special order. Standard transparent T-1 LEDs with brightness intensities of up to 60mcd are offered for direct view and backlighting applications. Standard diffused T-1 LEDs are offered for status mode applications that require high brightness and wide angle viewing.

Mounting hole pattern on page 1-X3.

ELECTRO-OPTICAL CHARACTERISTICS AND RATINGS

Part Number	Emitted Color	Lens Color	Package Type	Luminous Intensity		Forward Voltage		Viewing Angle (degrees)	Peak Wavelength (nm)
				Min. (mcd)	Typ. (mcd)	Typ. (V)	Max. (V)		
CMC01R	H.E.Red	Clear	Non-Diffused	24.0	60.0	2.0	2.5	30	625
CMC01Y	Yellow	Clear	Non-Diffused	24.0	60.0	2.1	2.5	30	590
CMC01G	H.E.Green	Clear	Non-Diffused	24.0	60.0	2.2	2.5	30	565
CMC01S	H.E.Red	Red	Non-Diffused	8.0	25.0	2.0	2.5	30	625
CMC01Z	Yellow	Yellow	Non-Diffused	8.0	25.0	2.1	2.5	30	590
CMC01H	H.E.Green	Green	Non-Diffused	8.0	25.0	2.2	2.5	30	565
CMW01R	H.E.Red	Red	Diffused	3.2	20.0	2.0	2.5	130	625
CMW01Y	Yellow	Yellow	Diffused	3.2	12.5	2.1	2.5	120	590
CMW01G	H.E.Green	Green	Diffused	3.2	12.5	2.2	2.5	120	565
CMW01S	H.E.Red	Red	Diffused	1.0	2.0	2.0	2.5	120	625
CMW01Z	Yellow	Yellow	Diffused	1.0	2.0	2.1	2.5	120	590
CMW01H	H.E.Green	Green	Diffused	1.0	2.0	2.2	2.5	120	565

147 Central Avenue
Hackensack, NJ 07601
Phone: (201) 489-8989
Fax: (201) 489-6911

18703 Dix Toledo Road
Brownstown, MI 48193

Saret Zone Franca, Edificio B
Alajuela Costa Rica

E-mail: sales@chml.com • Web Site: www.chml.com

Chicago Miniature Lighting, LLC reserves the right to make specification revisions that enhance the design and/or performance of the product