



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



IRIS

~10° spot beam with holder


TECHNICAL SPECIFICATIONS:

Dimensions	Ø 38.0 mm
Height	28.5 mm
Fastening	glue, screw
Colour	black
Box size	
Box weight	0 kg
Quantity in Box	580 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
IRIS	Lens	PMMA	clear
IRIS-HLD	Holder	PC	black

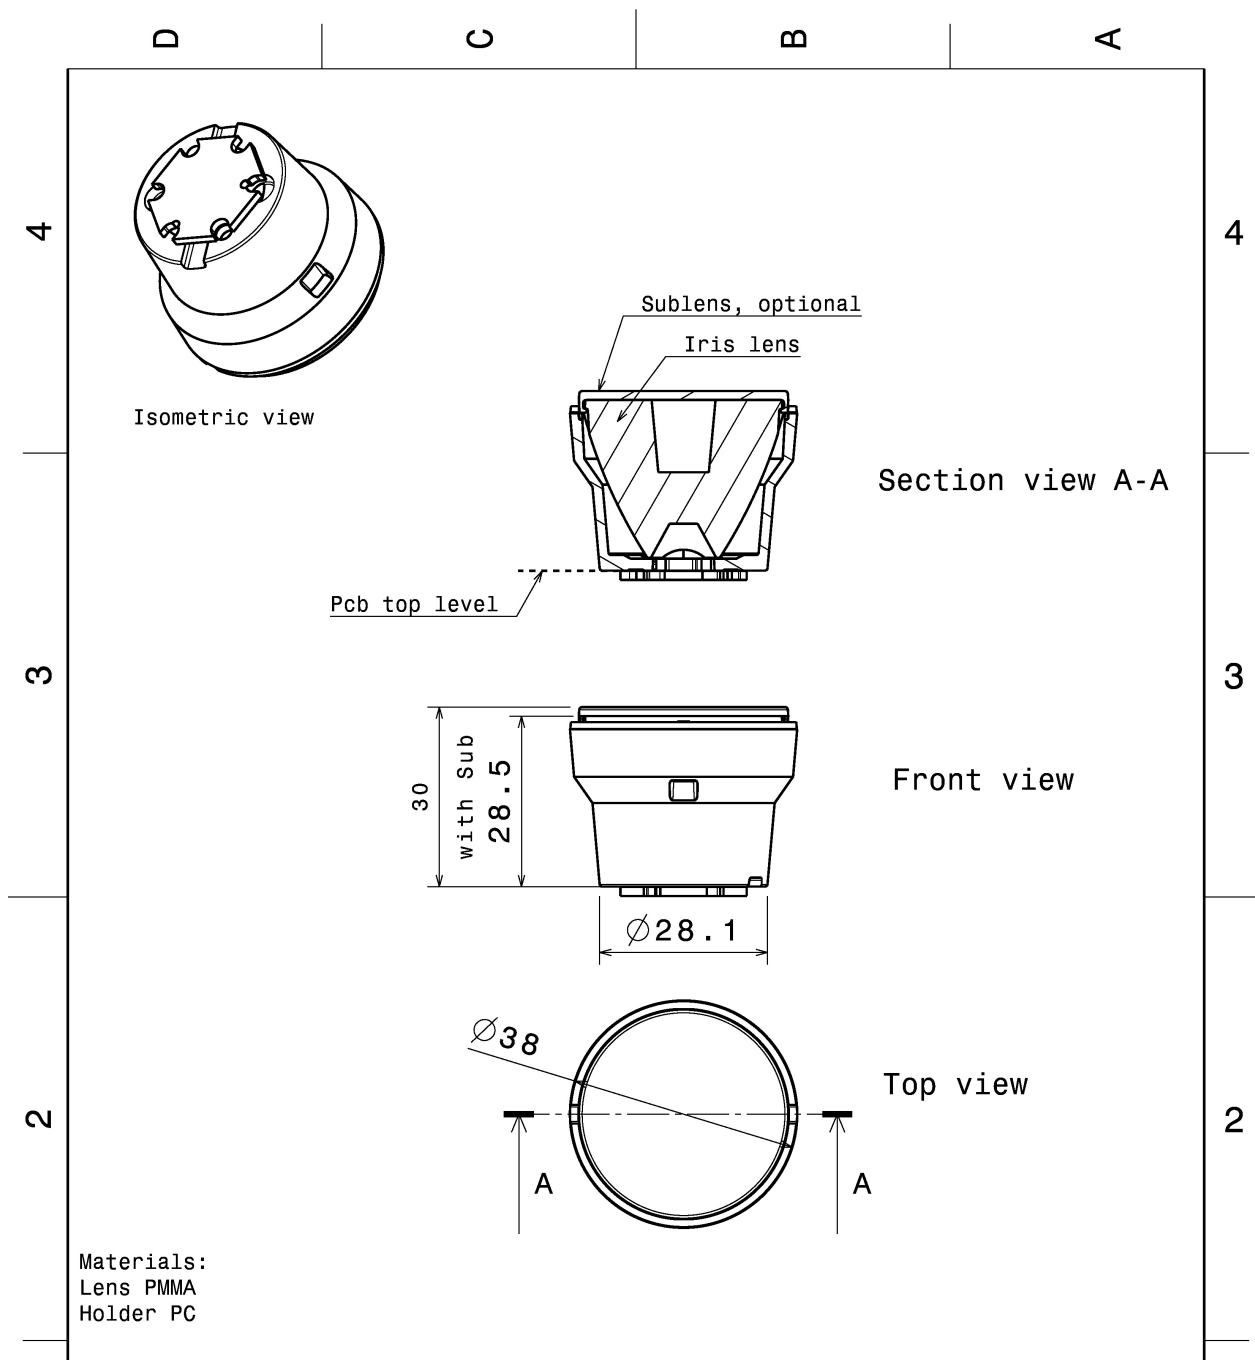

This drawing is our property. It can't be reproduced or communicated without our written agreement.




Ledil Oy
 Salorankatu 10
 FIN-24100 SALO
 Finland

DRAWN BY a		DATE 13.4.2012	DRAWING TITLE Datasheet Iris MC/ Ostar assy		
CHECKED BY x x	DATE 13.4.2012	SIZE A4	DRAWING NUMBER -		REV 1
DESIGNED BY	DATE	SCALE 1:1	WEIGHT (g)	SHEET 1/1	



PHOTOMETRIC DATA (MEASURED):





LED MC-E
 FWHM 11.0°
 Efficiency 89 %
 Peak intensity 15.000 cd/lm
 Required components:

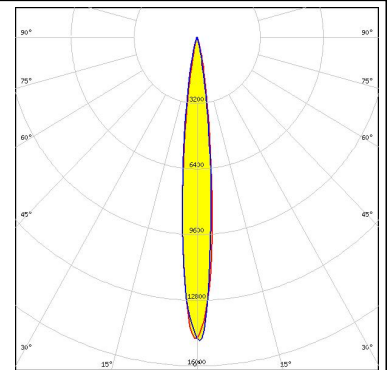


LED MHD-E/G
 FWHM 17.0°
 Efficiency 91 %
 Peak intensity 5.700 cd/lm
 Required components:

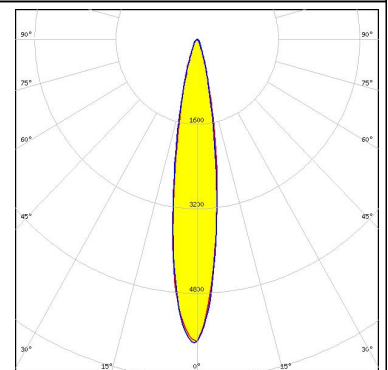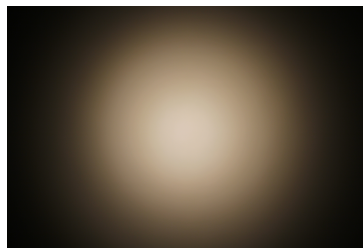

LED XHP50.2
 FWHM 16.0°
 Efficiency 83 %
 Peak intensity 8.200 cd/lm
 Required components:

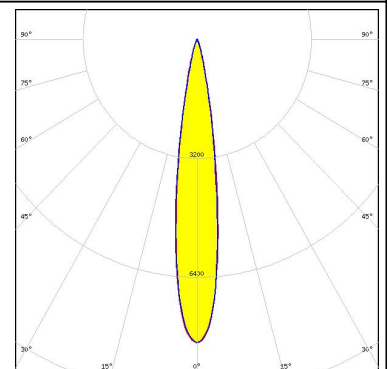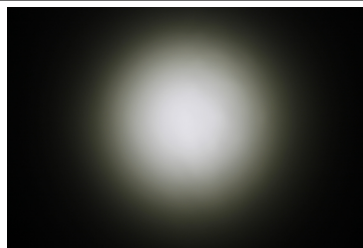


LED LUXEON CZ
 FWHM 5.0°
 Efficiency 80 %
 Peak intensity 57.000 cd/lm
 Required components:

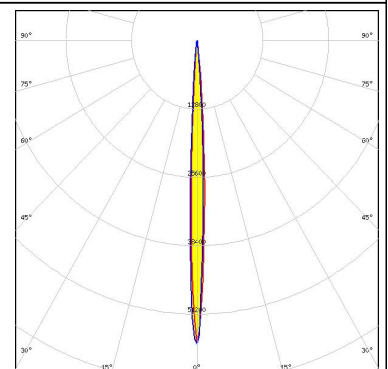

PHOTOMETRIC DATA (MEASURED):


LUMILEDS

LED LUXEON M/MX
 FWHM 16.0°
 Efficiency 87 %
 Peak intensity 9.100 cd/lm
 Required components:

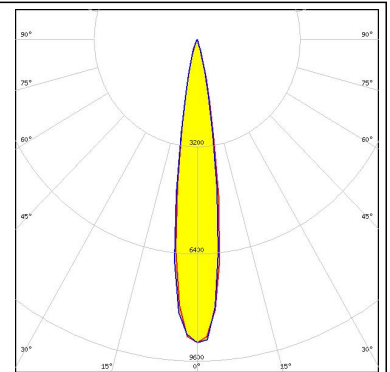


LUMILEDS

LED LUXEON MZ
 FWHM 12.0°
 Efficiency 82 %
 Peak intensity 15.840 cd/lm
 Required components:

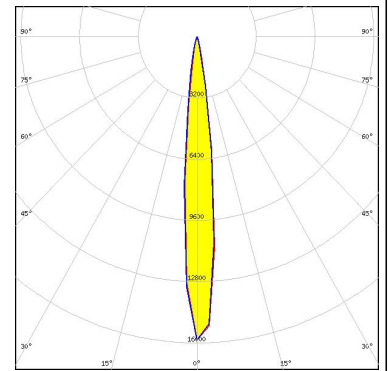


NICHIA

LED NFMW48xA
 FWHM 12.0°
 Efficiency 84 %
 Peak intensity 12.800 cd/lm
 Required components:

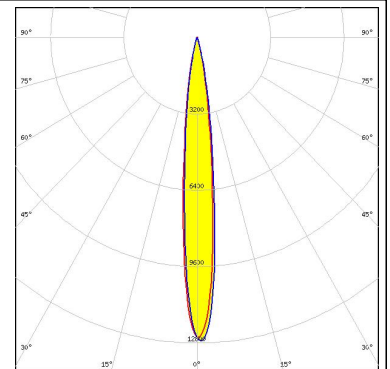

OSRAM Opto Semiconductors


LED Duris S10
 FWHM 13.0°
 Efficiency 79 %
 Peak intensity 8.800 cd/lm
 Required components:

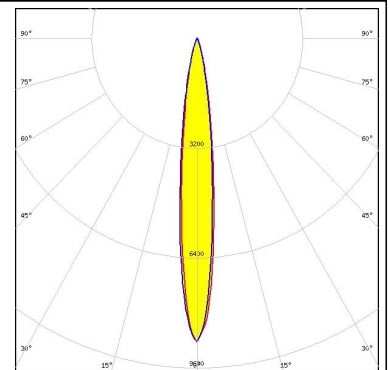

PHOTOMETRIC DATA (MEASURED):

OSRAM
Opto Semiconductors

LED Duris S8
FWHM 11.0°
Efficiency %
Peak intensity cd/lm
Required components:

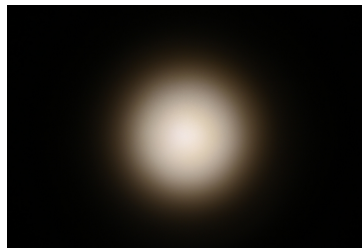

SEOL
SEOUL SEMICONDUCTOR

LED Z5M1/Z5M2
FWHM 7.0°
Efficiency 83 %
Peak intensity 40.400 cd/lm
Required components:




PHOTOMETRIC DATA (SIMULATED):




LED LUXEON 5258
FWHM 11.0°
Efficiency 89 %
Peak intensity 17.800 cd/lm
Required components:




LED OSCONIQ P 7070
FWHM 14.0°
Efficiency 87 %
Peak intensity 13.500 cd/lm
Required components:

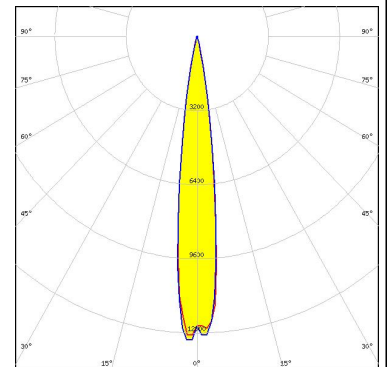


LED Oslon Square Flat
FWHM 12.0°
Efficiency 87 %
Peak intensity 13.800 cd/lm
Required components:

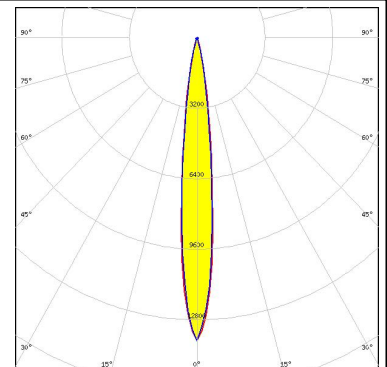

LED SFH 4770S
FWHM 8.1°
Efficiency 91 %
Peak intensity 3.410 cd/lm
Required components:

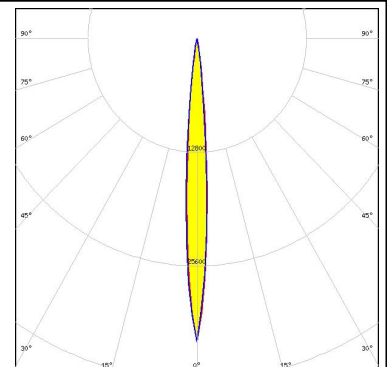

PHOTOMETRIC DATA (SIMULATED):

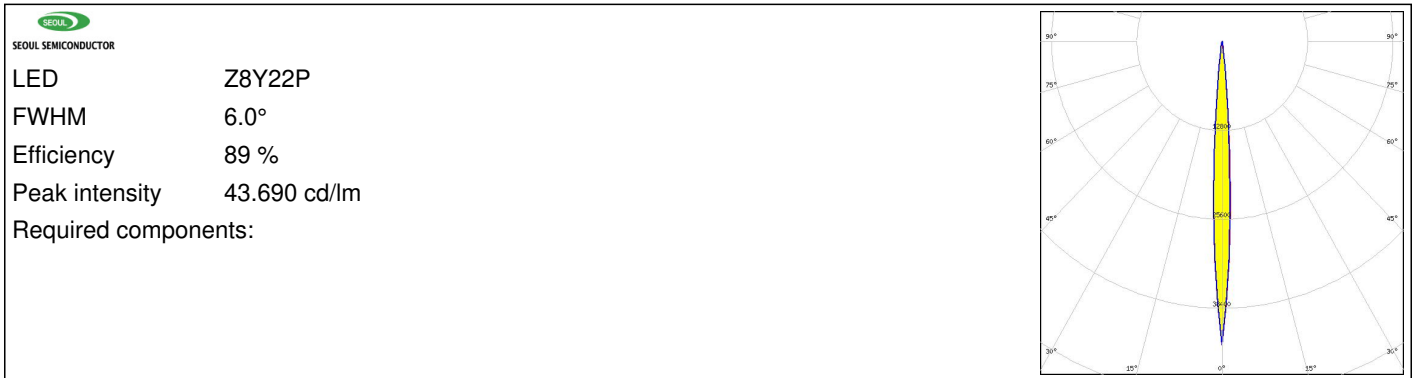

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)