

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








## THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

## NOTES:

- 1. CONFORMS TO EIA--310-D SPECIFICATIONS FOR RACKS AND CABINETS.
- 2. THE BONDING CAGE NUT AND BONDING SCREW MUST BE USED TOGETHER TO ACHIEVE BONDING BETWEEN EQUIPMENT MOUNTING FLANGES AND CAGE NUT RAILS. DO NOT SUBSTITUTE THE BONDING CAGE NUT OR BONDING SCREW WITH ANY OTHERS.

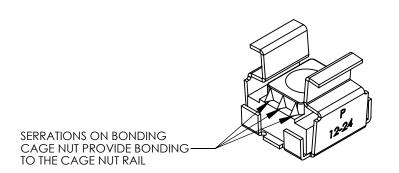

|  | PART NUMBERS |      |  |
|--|--------------|------|--|
| COMPONENT DESCRIPTION  | CNB4K        | CNBK |  |
|  | QUANTITY     |      |  |
| BONDING CAGE NUT<br>CAGE NUT RAIL THICKNESS TOLERANCE:<br>0.064 TO 0.105 in. [1.63mm TO .27 mm]<br>GREEN                                     | 4            | 50   |  |
| GREEN BONDING SCREW, 1/2 in. [12.7 mm] LONG<br>COMBO HEAD UTILIZES, #2 PHILLIPS OR<br>SLOTTED SCREWDRIVER OR 5/16 in.<br>OR 8mm SOCKET DRIVE | 4            | 50   |  |

| SERRATIONS UNDER HEAD OF BONDING SCREW PROVIDE BONDING TO THE EQUIPMENT FLANGE |  |
|--|--|
|--|--|

| 03  | 11/11 | JHNU | RGB  | REVISED PANEL THICKNESS: 0.105 WAS 0.0105  | N10966BD-C41747 | RGB | RGB |   |
|-----|-------|------|------|--|-----------------|-----|-----|---|
| 02  | 9/11  | JHNU | RGB  | ADDED NOTE 2 REVISED COMPONENT DESCRIPTION | N10966BD-C41747 | RGB | RGB | CORP. TINLEY PARK, ILLINOIS               |
| 01  | 7/08  | JHNU | JMAR | REVISED SCREW VIEW AND DESCRIPTION         |                 |     |     | BONDING CAGE NUT KIT<br>(CNB4K, CNBK)     |
| 00  | 4/08  | JHNU | JMAR | RELEASED                                   |                 |     |     | CUSTOMER DRAWING                          |
| REV | DATE  | BY   | СНК  | DESCRIPTION                                | ECN             | -R  | SUP | SCALE N/A DRAWING NO / CAD FILE C41747_03 |