



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



NOTES:

1. ROHS COMPLIANT
2. MATERIAL:
 PANEL CONNECTOR SOCKET - POLYPROPYLENE, UL RATING 94-HB
 HEADER CONNECTOR - POLYESTER, UL RATING 94-V0
 TERMINALS - PHOSPHOR BRONZE, TIN PLATE
 WIRE - 24 AWG 1007/ 1569
3. MOUNTING: HOLE SIZE - 9/32" (7.14mm)
4. PANEL THICKNESS: .030" (.762mm) MIN - .220" (5.588mm) MAX
 USING CMC 285:
 FOR PANEL THICKNESS .030" (.762mm) - .045" (1.143mm) USE 2 SPC 060 SPACERS
 FOR PANEL THICKNESS .050" (1.27mm) - .100" (2.54mm) USE 1 SPC 060 SPACER
 FOR PANEL THICKNESS .105" (2.67mm) - .125" (3.175mm) NO SPACER REQUIRED
 USING CML 325 OR CML 327:
 FOR PANEL THICKNESS .060" (1.524mm) - .100" (2.54mm) USE 2 SPC 060 SPACERS
 FOR PANEL THICKNESS .105" (2.667mm) - .125" (3.175mm) USE 1 SPC 060 SPACER
 FOR PANEL THICKNESS .150" (3.81mm) - .220" (5.588mm) NO SPACER REQUIRED
5. LED LEAD LENGTH: FOR CMC 285 - .350" ± .01" (8.89mm ± 0.254mm)
 FOR CML 325 OR CML 327 - .275" ± 0.01" (6.985mm ± 0.254mm)
6. U.S. & FOREIGN PATENT ISSUED AND PENDING




REVISIONS				
ECN #	REV	DESCRIPTION	DATE	INITIALS
	001	REVISED PER ECR 111009AZ01	11/26/10	KH

CABLE ORDERING CODE EXAMPLE:

CNX D F 4 6 12

TERMINATION *		WIRE SIZE *		WIRE COLOR*		WIRE LENGTH *	
X =	STRIPPED END	24	24 AWG	6	WHITE - BLACK - RED	04	4 INCHES (101.6mm)
F =	SINGLE ROW LOCKING HEADER					06	6 INCHES (152.4mm)
						08	8 INCHES (203.2mm)
						12	12 INCHES (304.8mm)
						18	18 INCHES (457.2mm)
						24	24 INCHES (609.6mm)

* CALL FACTORY FOR ADDITIONAL OPTIONS

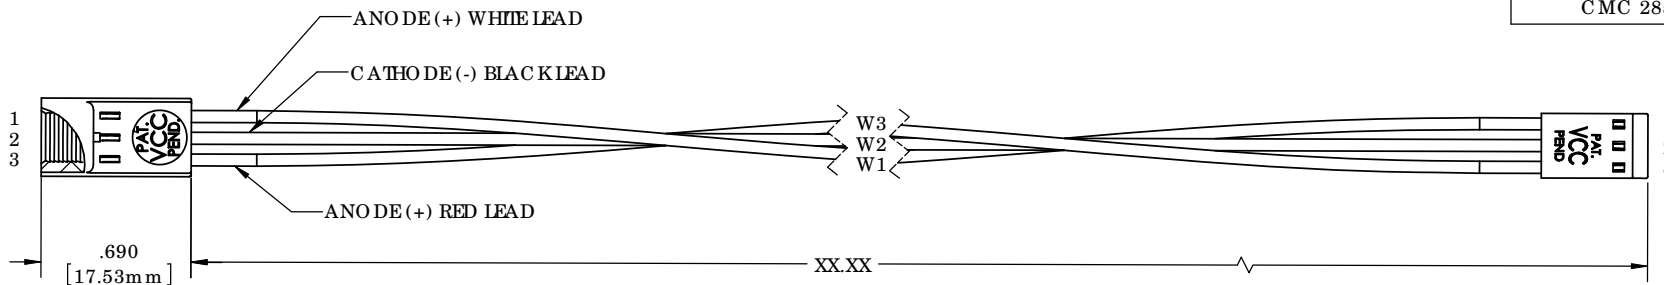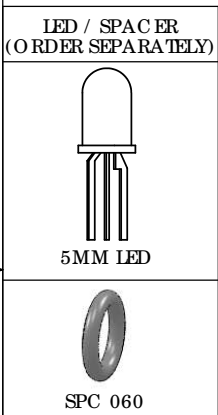

DIMENSION STYLE: INCHES / MM GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED: INCHES ±.500 MM ± 12.7	MATERIAL	SEE NOTES		
	FINISH	SEE NOTES		
 THIRD ANGLE PROJECTION	APPROVAL	DATE	VCC OPTOELECTRONICS 190 BOSSIE K BLVD, SUITE 101 SAN MARCOS, CA 92069 U.S.A. PHONE (760) 560-1300, FAX: (760) 560-1301 EMAIL: vc csales@vccite.com	
	DRAWN K.Howard CHECKED DPZ	11/26/10 11/29/10	TITLE: CNX D CABLE ASSEMBLY	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VISUAL COMMUNICATIONS COMPANY, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VISUAL COMMUNICATIONS COMPANY, INC IS PROHIBITED.		DO NOT SCALE DRAWING	SIZE DWG. NO. B CNX D ASSY	REV 001
			SCALE: 1.75:1	SHEET 1 OF 1