



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




General Accessories

M8 IP69K Connector Cables

Type CONB54-..W

CARLO GAVAZZI

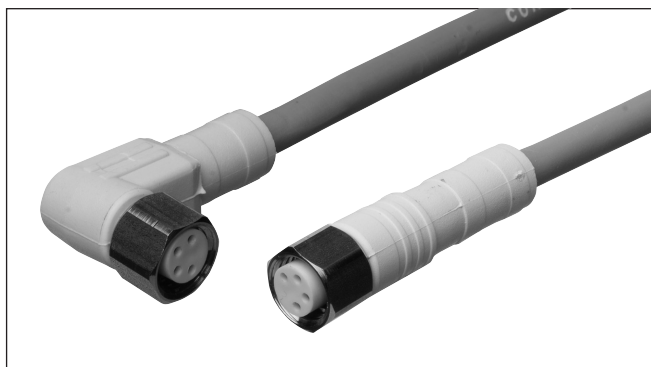


- IP69K version
- Straight or 90° connector
- M8 version
- 4-wire
- Good resistance against chemicals
- High temperature - up to 105°C (UL 90°C)
- UL and ECOLAB approved

Product Description

Highly robust IP69K connection cables for harsh environments. Especially suitable for use in washdown industries such as food & beverage, chemical and pharmaceutical industries thanks to the high standards of UL and ECOLAB. Featuring UL certified temperatures of up to 90°C, ECOLAB certification and IP69K protection class, the CONB IP69K connectors offer a guaranteed

long term reliability even in the harshest environments. Moreover, the connectors are resistant to aggressive chemicals and cleaning agents adhering to high Ecolab standards which make them very suitable to be used in Food & Beverage industry. For maximum flexibility, the connectors are available in straight or angled versions in M8 connector, 4 wires.

Ordering Key **CONB54NF-A2W**

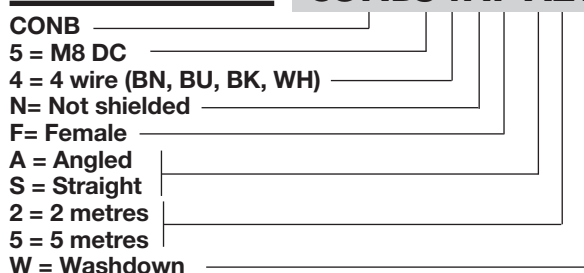

Type Selection


Plug type	Cable length	Ordering number TPE
4-Wire Angled	2 m	CONB54NF-A2W
	5 m	CONB54NF-A5W
4-Wire Straight	2 m	CONB54NF-S2W
	5 m	CONB54NF-S5W

Specifications


Rated operating voltage (U_B)	30V AC/DC	Tightening torque	0.5 Nm
Output current	≤ 4 A	Connection cable	TPE orange
Contact resistance	≤ 5 mΩ	Wire cross section	4 x 0.25 mm ² (jacket Ø 4.7 mm)
Contact material	Cu/Sn	Weight	approx 54g approx 130g
Coating	Cu/Au	2 m version	
Contact bearer material	PP white	5 m version	
Temperature	-40° to +105°C (90°C UL) -40° to +221°F (194°F UL)	Pollution degree	3
Degree of protection	IP69K	Overvoltage category	III
O-ring sealing	EPDM		
Rated Impulse Voltage	0.8 kV		
Insulation resistance	> 10 ⁹ Ω		
Moulded body material	PP white		
Union Locking nut	V4A		

Dimensions


Straight Version

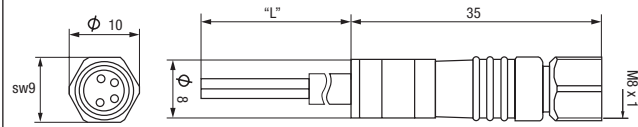

Angled Version

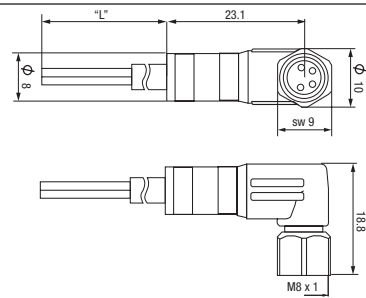

Contact layout



Colour Code

- 1 Brown
- 2 White
- 3 Blue
- 4 Black

Derating Curve (DIN EN 60512-5-2)

