



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## CARMEN-W-C

~55° wide beam. Assembly with holder C compatible with LEDiL HEKLA.


### TECHNICAL SPECIFICATIONS:

Dimensions	Ø 69.5 mm
Height	41.5 mm
Fastening	socket
Colour	black
Box size	476 x 273 x 292 mm
Box weight	4.5 kg
Quantity in Box	150 pcs
ROHS compliant	yes ⓘ


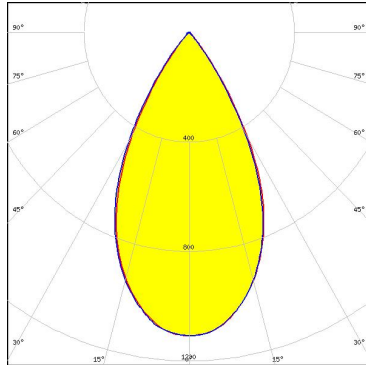
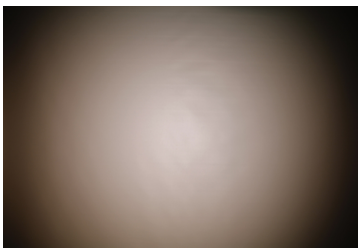
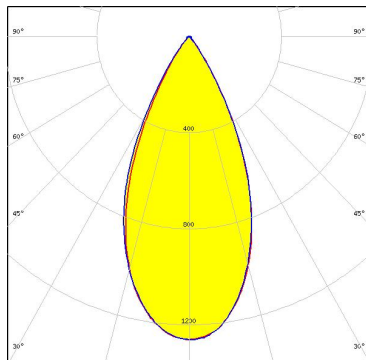

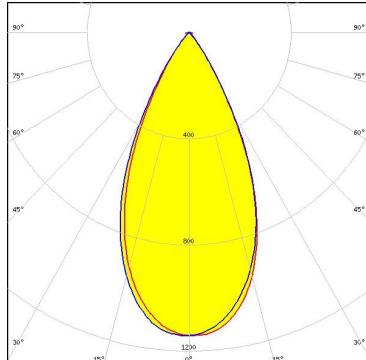
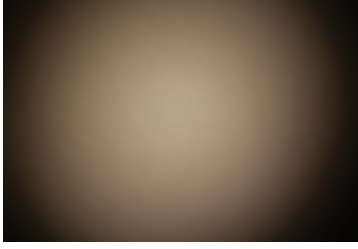
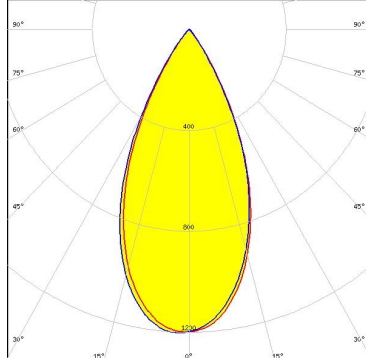


### MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
CARMEN-W	Lens	PMMA	clear
CARMEN-HLD-C	Holder	PC	black

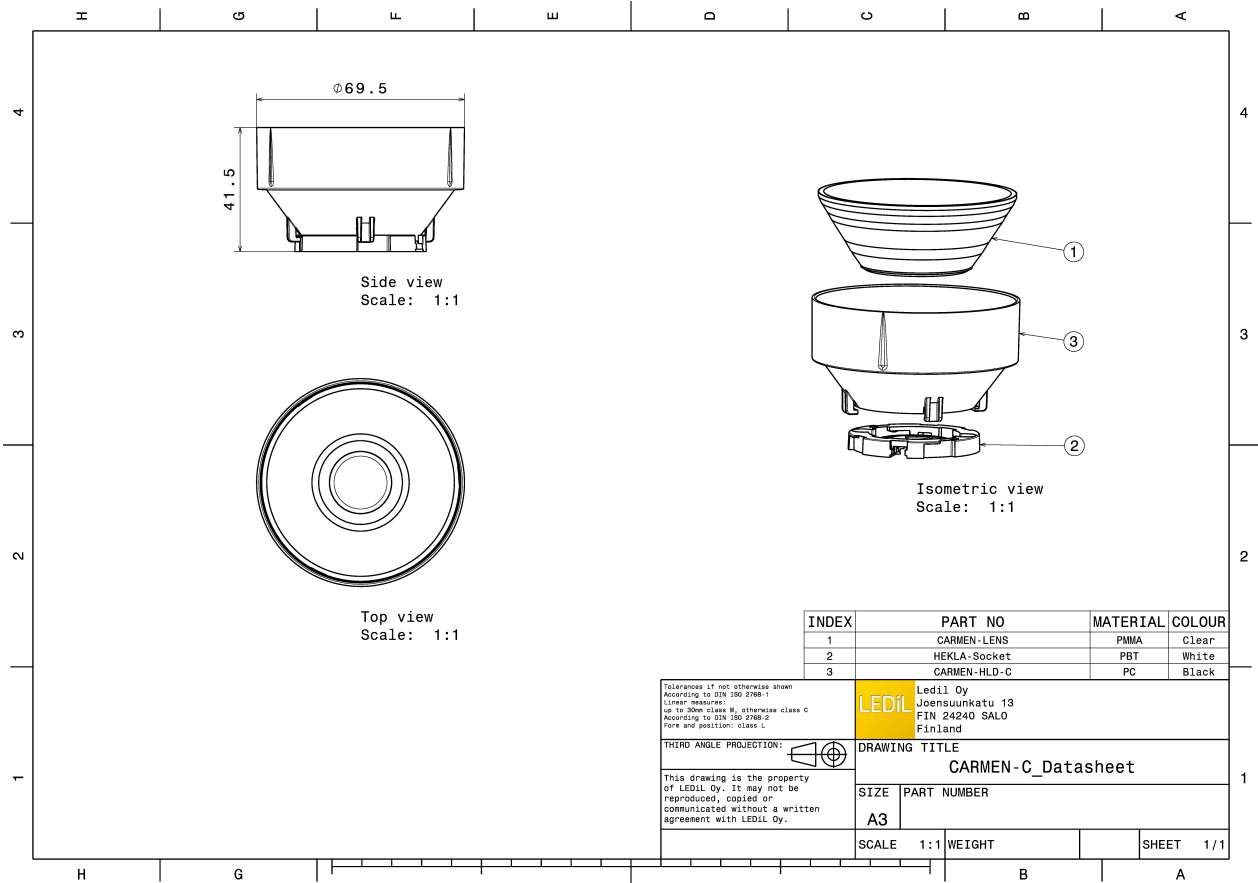



#### PHOTOMETRIC DATA (MEASURED):

<p>bridgelux.</p> <p>LED VERO10</p> <p>FWHM 55.0°</p> <p>Efficiency 83 %</p> <p>Peak intensity 6.900 cd/lm</p> <p>Required components:</p>		
<p>bridgelux.</p> <p>LED Vesta DTW 9mm (6W/12W)</p> <p>FWHM 48.0°</p> <p>Efficiency 76 %</p> <p>Peak intensity 1.300 cd/lm</p> <p>Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 490 Typ L8</p>		
<p>bridgelux.</p> <p>LED Vesta TW 9mm (12W)</p> <p>FWHM 50.0°</p> <p>Efficiency 75 %</p> <p>Peak intensity 1.100 cd/lm</p> <p>Required components: C16142_HEKLA-SOCKET-K</p>		
<p><b>CITIZEN</b></p> <p>LED CLC020 Series (Dim-To-Warm)</p> <p>FWHM 48.0°</p> <p>Efficiency 75 %</p> <p>Peak intensity 1.200 cd/lm</p> <p>Required components: C16142_HEKLA-SOCKET-K</p>		

#### PHOTOMETRIC DATA (MEASURED):



#### CITIZEN

LED CLL02x/CLU02x (LES10)  
 FWHM 54.0°  
 Efficiency 82 %  
 Peak intensity 1.100 cd/lm  
 Required components:  
 F15255\_HEKLA-SOCKET-C

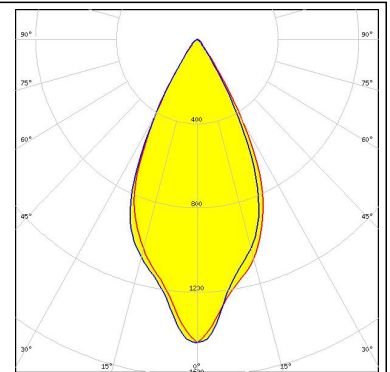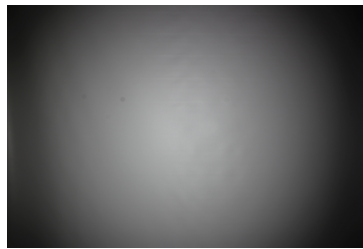



#### CITIZEN

LED CLU LES 4.2mm (HI-Ver.3)  
 FWHM 54.0°  
 Efficiency 86 %  
 Peak intensity 1.200 cd/lm  
 Required components:  
 F15255\_HEKLA-SOCKET-C

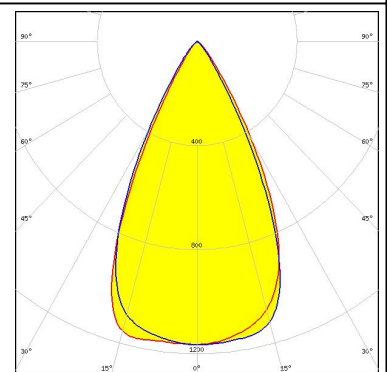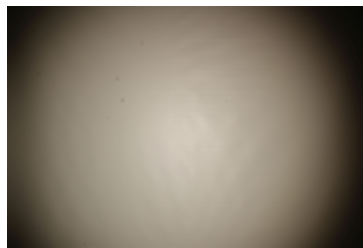



#### CITIZEN

LED CLU700/701  
 FWHM 52.0°  
 Efficiency 85 %  
 Peak intensity 1.200 cd/lm  
 Required components:  
 F15255\_HEKLA-SOCKET-C

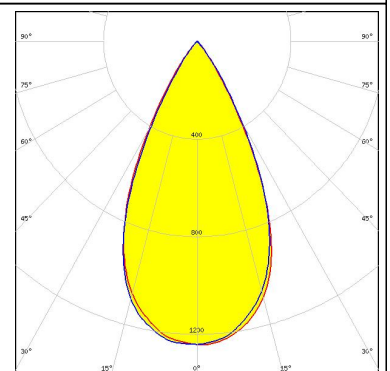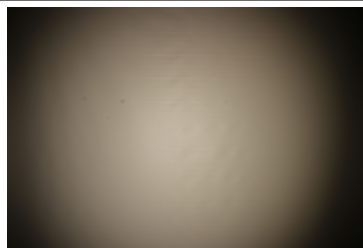

#### CITIZEN


LED LCN-C01B (Tunable White)  
 FWHM 49.0°  
 Efficiency 74 %  
 Peak intensity 1.200 cd/lm  
 Required components:  
 C16142\_HEKLA-SOCKET-K

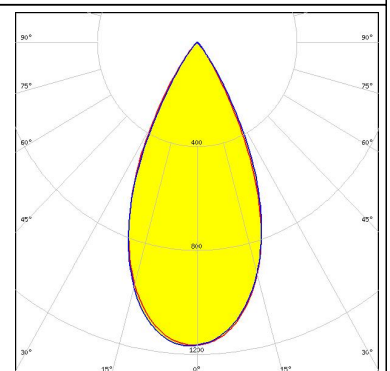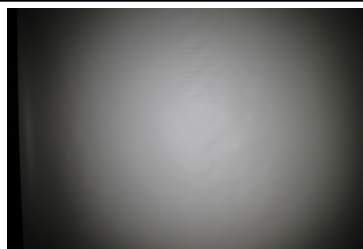



#### PHOTOMETRIC DATA (MEASURED):





LED CMA1516  
 FWHM 55.0°  
 Efficiency 82 %  
 Peak intensity 1.100 cd/lm  
 Required components:  
 F15256\_HEKLA-SOCKET-D

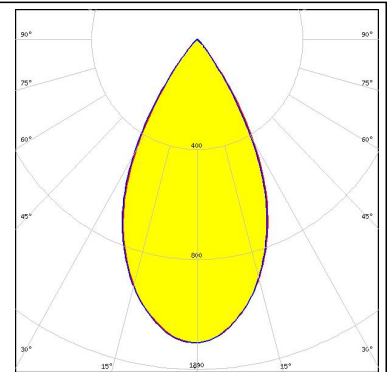



LED LUXEON CoB 1205HD  
 FWHM 56.0°  
 Efficiency 76 %  
 Peak intensity 1.000 cd/lm  
 Required components:  
 F15858\_HEKLA-SOCKET-H

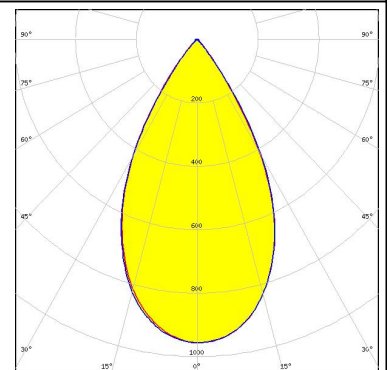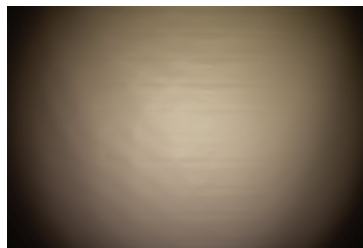

LED CDM-6 (Dim-To-Warm)  
 FWHM 51.0°  
 Efficiency 78 %  
 Peak intensity 1.200 cd/lm  
 Required components:  
 C16142\_HEKLA-SOCKET-K  
 Bender Wirth: 490 Typ L8

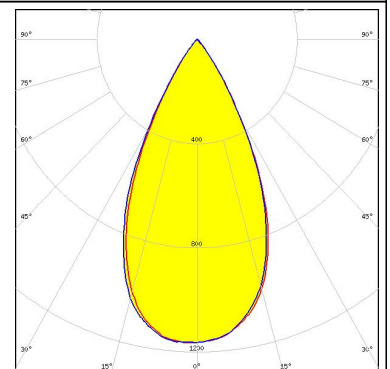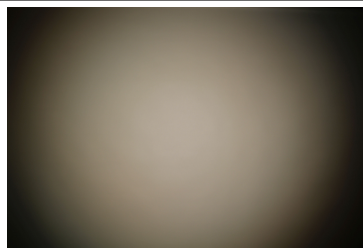



LED CDM-9 (Dim-To-Warm)  
 FWHM 53.0°  
 Efficiency 77 %  
 Peak intensity 1.100 cd/lm  
 Required components:  
 C16142\_HEKLA-SOCKET-K  
 Bender Wirth: 490 Typ L8

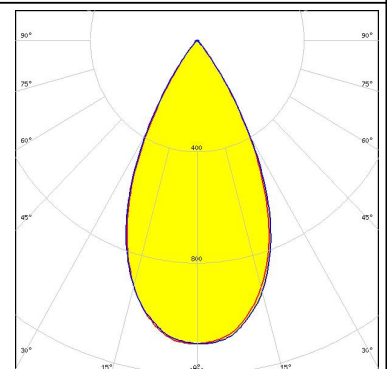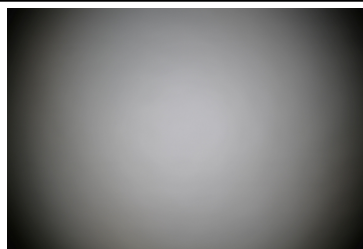



#### PHOTOMETRIC DATA (MEASURED):





LED CTM-9 (Tunable White)  
FWHM 53.0°  
Efficiency 77 %  
Peak intensity 1.100 cd/lm  
Required components:  
C16142\_HEKLA-SOCKET-K  
Bender Wirth: 495 Typ L8

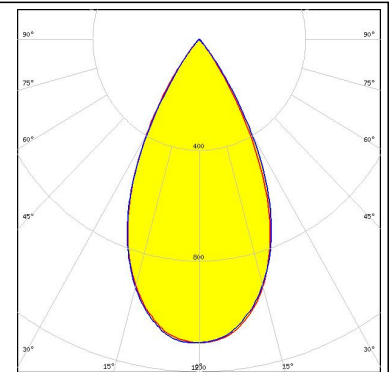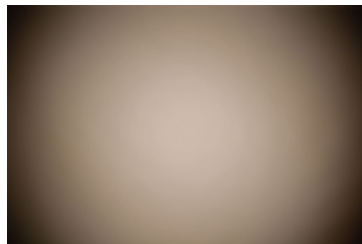



LED CXM-9  
FWHM 53.0°  
Efficiency 81 %  
Peak intensity 1.100 cd/lm  
Required components:  
F15255\_HEKLA-SOCKET-C

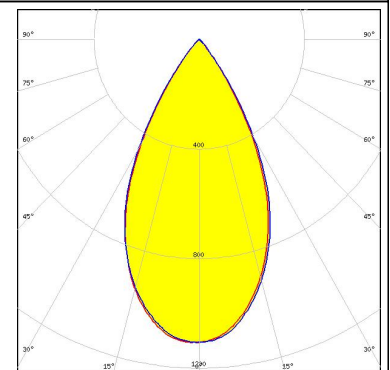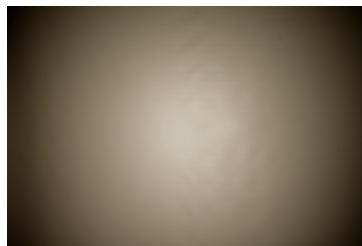

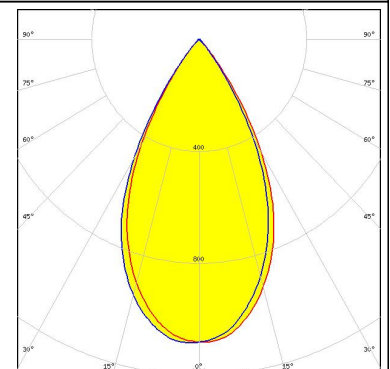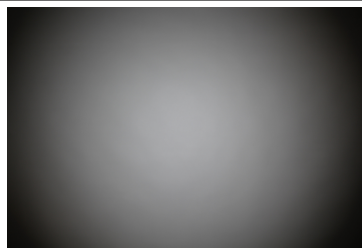



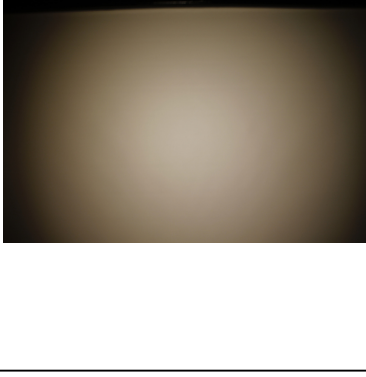
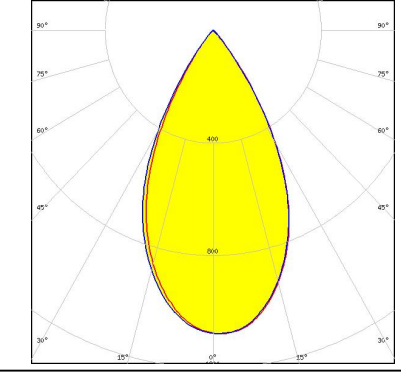
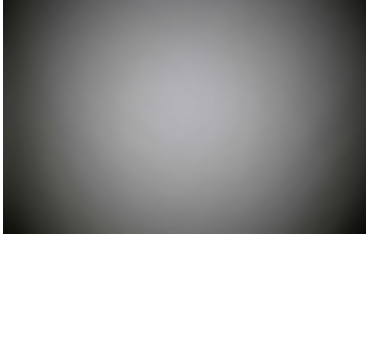
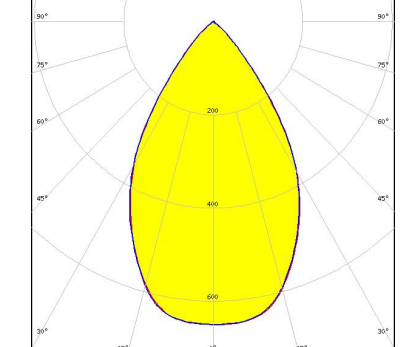
LED COB D Series LES 9.8 mm  
FWHM 55.0°  
Efficiency 82 %  
Peak intensity 1.100 cd/lm  
Required components:  
F15255\_HEKLA-SOCKET-C

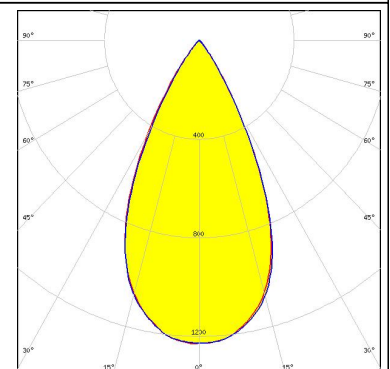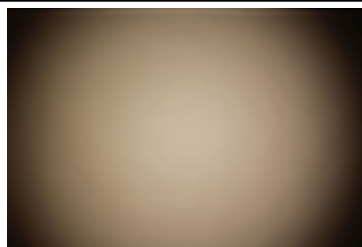

LED LC010C G2  
FWHM 52.0°  
Efficiency 84 %  
Peak intensity 1.200 cd/lm  
Required components:  
F15255\_HEKLA-SOCKET-C



#### PHOTOMETRIC DATA (MEASURED):

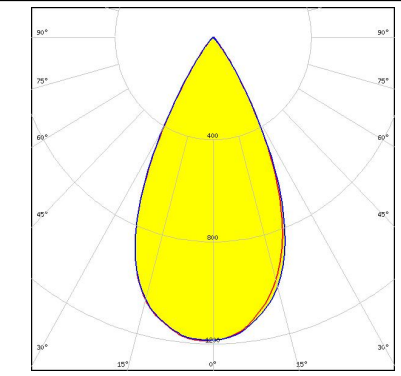
<p> SEOUL SEMICONDUCTOR</p> <p>LED MJT COB LES 6 FWHM 52.0° Efficiency 82 % Peak intensity 1.200 cd/lm Required components: F15255_HEKLA-SOCKET-C</p>		
<p> SEOUL SEMICONDUCTOR</p> <p>LED MJT COB LES 9.8 FWHM 54.0° Efficiency 79 % Peak intensity 1.100 cd/lm Required components: F15255_HEKLA-SOCKET-C</p>		
<p><b>XICATO</b></p> <p>LED XTM - 19mm LES FWHM 64.0° Efficiency 66 % Peak intensity 0.650 cd/lm Required components: C16058_XTM-ADAPTER-50-C</p>		




#### PHOTOMETRIC DATA (SIMULATED):




LED VERO10  
FWHM 50.7°  
Efficiency 0 %  
Peak intensity 1.600 cd/lm  
Required components:  
F15616\_HEKLA-SOCKET-F

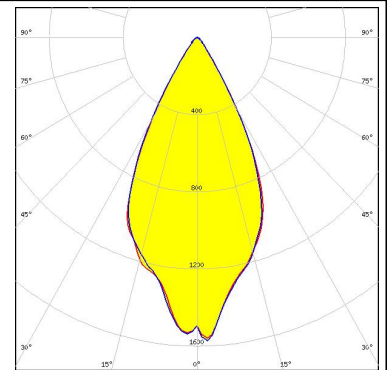


LED CXA/B 15xx  
FWHM 53.5°  
Efficiency 0 %  
Peak intensity 1.365 cd/lm  
Required components:  
F15256\_HEKLA-SOCKET-D

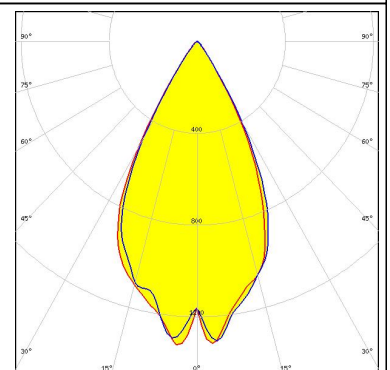

LED COB T-Type  
FWHM 54.0°  
Efficiency 84 %  
Peak intensity 1.200 cd/lm  
Required components:  
F15848\_HEKLA-SOCKET-G

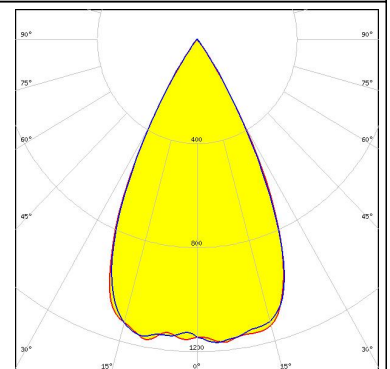

LED SLE G6 LES10  
FWHM 51.0°  
Efficiency 76 %  
Peak intensity 1.100 cd/lm  
Required components:  
F15255\_HEKLA-SOCKET-C

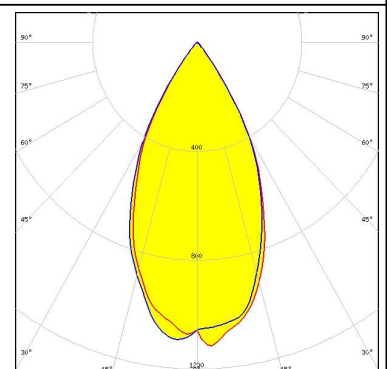

#### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

#### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Local sales and technical support

[www.ledil.com/where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/where\\_to\\_buy](http://www.ledil.com/where_to_buy)