

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










Core **U20/16/7**

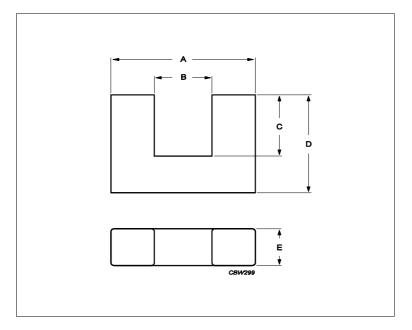

Effective parameters				
	Parameter	Value	Unit	
Σ(I/A)	core factor (C1)	1.21	mm ⁻¹	
Ve	effective volume	3800	mm³	
Le	effective length	68	mm	
Ae	effective area	56	mm²	
Amin	minimum area		mm²	
m	U20/16/7	≈ 9	g/pcs	

Dimensions for product: U20/16/7						
	Nom	Tol +	Tol -	Max	Min	Unit
Α	20.80	0.60	0.60	21.40	20.20	mm
В	6.40	0.40	0.40	6.80	6.00	mm
С	8.30	0.30	0.30	8.60	8.00	mm
D	15.60	0.20	0.20	15.80	15.40	mm
E	7.50	0.25	0.25	7.75	7.25	mm

Inductance factor				
Material	Value	Tol +	Tol -	Unit
3C90	1900	25%	25%	nH/turns²
3C94	1900	25%	25%	nH/turns²

Power loss: 3C90					
ı	Measuring condition	s	Max	Unit	
25 kHz	200 mT	100 °C	0.460	W/set	
	Power loss: 3C94				
ı	Measuring conditions		Max	Unit	
100 kHz	200 mT	100 °C	1.900	W/set	

Bsat					
	Measuring condition	s	Material	Min	Unit
25 kHz	250 A/m	100 °C	3C90	320	mT
25 kHz	250 A/m	100 °C	3C94	320	mT

Accessories				
Ordering name	Description	Ordering code		

Product specifications



Core **U20/16/7**

-	r	• · · · ·
CPH-U20/16/7-1S-4P	Coil former, termoplastic, horizontal	432202107091