# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# **CPH6020**

# **RF Transistor** 8V, 150mA, fT=16GHz, NPN Single CPH6



# **Features**

- Low-noise use : NF=1.2dB typ (f=1GHz)
- High cut-off frequency  $: f_T=16GHz typ (V_{CE}=5V)$
- High gain
- $|S21e|^2=13.5$ dB typ (f=1GHz)

# **Specifications**


#### Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Conditions	Ratings	Unit
Collector-to- Base Voltage	VCBO		15	V
Collector-to-Emitter Voltage	VCEO		8	V
Emitter-to-Base Voltage	VEBO		2	V
Collector Current	IC		150	mA
Collector Dissipation	PC	When mounted on ceramic substrate (250mm <sup>2</sup> ×0.8mm)	700	mW
Junction Temperature	Tj		150	°C
Storage Temperature	Tstg		-55 to +150	°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

#### **Package Dimensions**

unit : mm (typ) 7018A-002

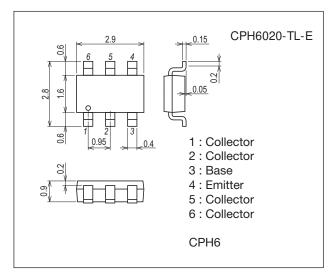

## **Product & Package Information**

- : CPH6
- - : SC-74, SOT-26, SOT-457


Marking

• Minimum Packing Quantity : 3,000 pcs./reel

#### Packing Type: TL


• Package

• JEITA, JEDEC





#### **Electrical Connection**




#### Electrical Characteristics at Ta=25°C


Parameter	Sumbol	Conditions		Unit			
Faranieter	Symbol Conditions -		min	typ	max	Unit	
Collector Cutoff Current	ICBO	V <sub>CB</sub> =5V, I <sub>E</sub> =0A			1.0	μA	
Emitter Cutoff Current	IEBO	V <sub>EB</sub> =1V, I <sub>C</sub> =0A			1.0	μA	
DC Current Gain	hFE	V <sub>CE</sub> =5V, I <sub>C</sub> =50mA	60		150		
Gain-Bandwidth Product	fT	V <sub>CE</sub> =5V, I <sub>C</sub> =50mA	13	16		GHz	
Forward Transfer Gain	S21e   <sup>2</sup>	VCE=5V, IC=50mA, f=1GHz	10	13.5		dB	
Noise Figure	NF	V <sub>CE</sub> =1V, I <sub>C</sub> =10mA, f=1GHz		1.2	1.8	dB	


Notre) Pay attention to handling since it is liable to be affected by static electricity due to the high-frequency process adopted.

#### **Ordering Information**

Device	Package	Shipping	memo	
CPH6020-TL-E	CPH6	3,000pcs./reel	Pb Free	

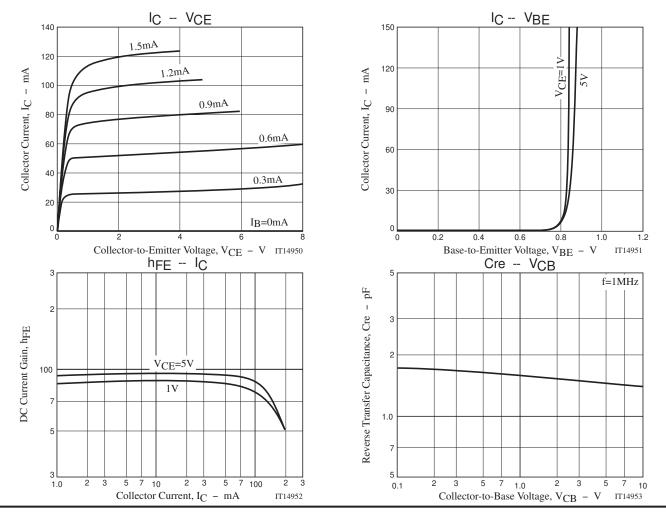

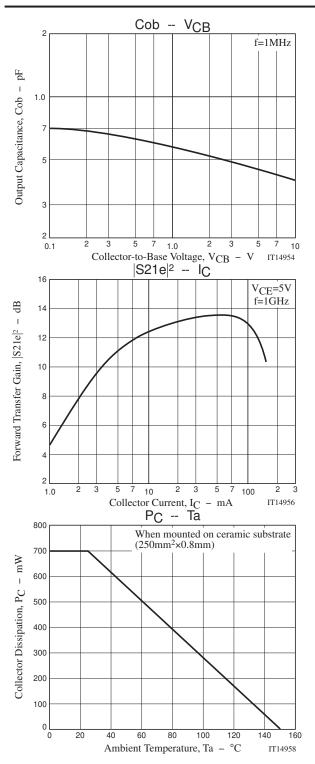

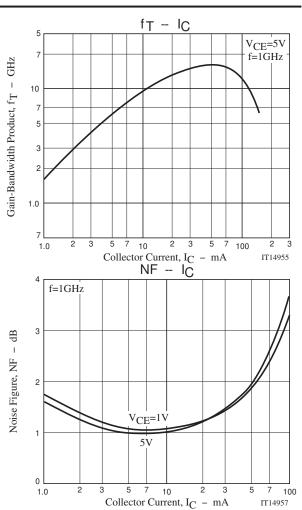


### **Embossed Taping Specification** CPH6020-TL-E

1. Packing Format

Package Name Carrier Tape		Maximum Number of devices contained (pcs)			Packing format					
	Туре	Reel Inner box Outer box			Inner BOX (C-1)			Outer BOX (A-7)		
CPH6	CPH6	3,000	15,000	90,000	5 ree	ls contain	ed	6 inner boxes contained		
					Dimen	sions:mm	(exierna	l) Dimensions:mm (external)		
					18	3×72>	×185	440×195×210		
			Reel	label, J	[nner l	oox label		er box label		
Packing me	t h o d			(u :	nit:m	m)	The f	a label at the time of factory shipmen orm of a label may change in physical ibution process.		
0	<				<u> 5</u> 9	>	k	108		
	Type LOT Quan	No.	-> "	I TYPE OOOC II SIIIII INEII I IIIIII II SIIIII INEII I IIIIIII II IIIII INEII I IIIIIII I CTY O, OO II I IIIII INIII IIIIIIII			2 Tasp-	TYPE CODE		
	Orig	27.0	(2)	N 11118 11118 11118 SPECIAL N 11111 11111 111111 * 2 0 7 2 2 SSEMBLY: **** (		C*	8	LOT		
N N	\	a∎es op a∎	NOTE	; (1)			_ <u>k</u>			
	∖ Reel la	bel	- Th tr	e LEAD Fi eatment	REE % d of the	escriptio terminal	n shows is lead	that the surface free.		
			[	Label	, T	JEITA	Phase			
				LEAD FRI			Phase 31			
				LEAD FRI	EE 4	JEITA 1	Phase 3			


2. Taping configuration

2-1. Carrier tape size (unit:mm)

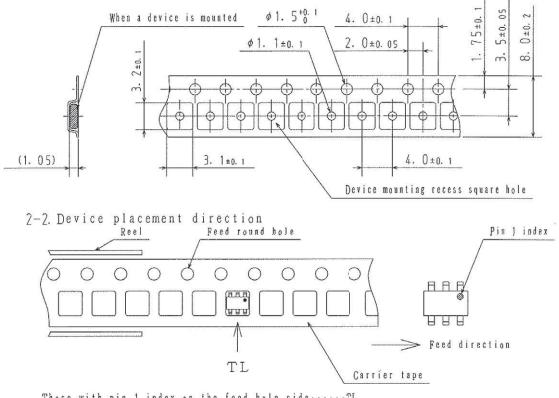


Those with pin 1 index on the feed hole side ..... TL

### Outline Drawing CPH6020-TL-E

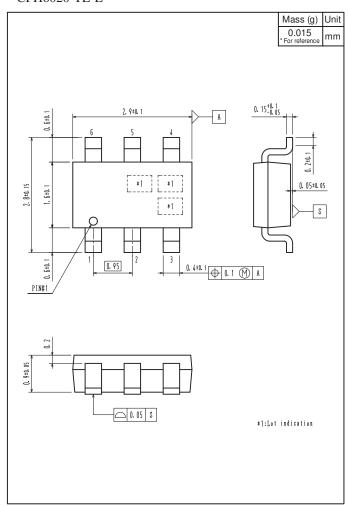

# Land Pattern Example

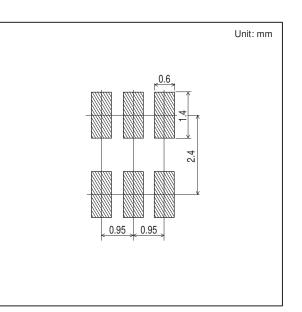

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typical" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal