



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Programmable LVPECL Oscillator

Series

CPPHE

- \* LVPECL Output
- \* Factory Programmable
- \* Differential LVPECL Output
- \* Industry Standard Packaging

### Applications


- \* Serial Communications
- \* Routers
- \* Switches
- \* WAN Interfaces
- \* Test Equipment




Part Numbering Example: CPPHE7-A7BR-Freq.

Specifications:	Min	Typ	Max	Unit
Frequency Range:	200		700	MHz
Stability:	-25		+ 25	ppm
Supply Voltage:	3.125	3.3	3.465	V
Operating Temperature:	-40		+ 85	°C
Storage Temperature:	-55		+ 125	°C
Duty Cycle:	45		55	%
Start-Up Time:		3	10	mS
Aging: (ppm/1st Year) Ta=25°C, Vdd=3.3V			5	ppm
Static Discharge Voltage:	2000			V
Supply Current:			130	mA
Short Circuit Current:		± 50		mA
Jitter (RMS) Period:		10		pS
Output Voltage Voh Vol	Vdd - 1.025		Vdd - 1.62	V V
Rise/Fall Time:		0.6	1.5	nS
Output Level:	LVPECL			
Packaging:	Tape and Reel 1000 pcs per Reel			

Tristate internal pull up, output active when high

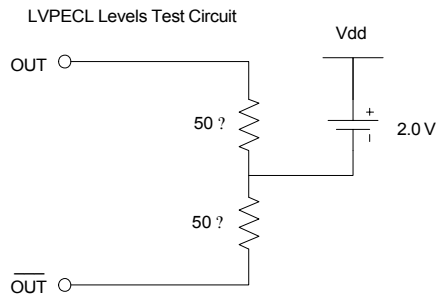

Dimensions are in mm

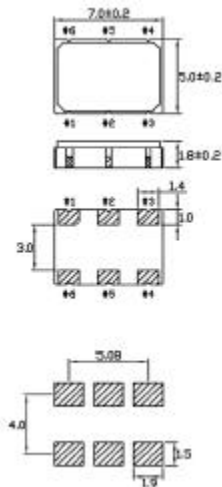

- PIN Function
- 1 OE (CMOS)
  - 2 Do Not Connect
  - 3 Ground
  - 4 LVPECL +
  - 5 LVPECL -
  - 6 Vdd


Solder Pad Layout

Cardinal Components, Inc.

155 Route 46 West

Wayne, NJ 07470

Rev: C-090414-11



TEL: (973)785-1333

E-MAIL: sales@cardinalxtal.com

WEB: http://www.cardinalxtal.com