

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







SPECIFICATION CONTROL DRAWING

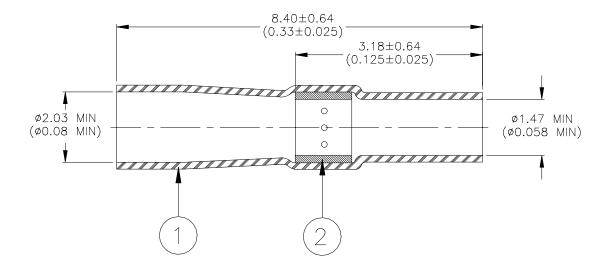

MATERIALS

- 1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- 2. SOLDER PREFORM WITH FLUX:

SOLDER: TYPE Sn63 per ANSI J-STD-006. FLUX: TYPE ROL1 per ANSI-J-STD-004.

APPLICATION

- 1. This part is designed to attach a 24 to 20 gauge tin or silver plated wire to size 20 solder cup, 1.47 (0.058) max. O.D. x 3.18 (0.125) high.
- 2. Sleeve will recover to 0.81 (0.032) max. I.D.
- 3. Temperature rating of terminators: -65°C to 150°C.
- 4. This drawing forms a part of Raychem Devices Specification Control Drawing: D-700-00, $\ 2.74\ (0.108)$ centers

	n Inter Ttype ELECTR Constitution D Jurk, CA 9402	Prive	I I	IERMOFIT DEVICES	SOLDERSLEEVE WIRE TERMINATOR #20 SOLDER CUP, 24-20 GAUGE HIGH TEMPERATURE WIRE			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.					DOCUMENT NO.: D-136-03			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON		Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D990739		REPLACES: N/A	
DRAWN BY: M. FORONDA		DATE	E: 19-May-00	PROD. REV. N	DOC ISSUE:	SCALE: None	SIZE:	SHEET: 1 of 1