



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CRF24010

10 W, SiC RF Power MESFET

Cree's CRF24010 is an unmatched silicon carbide (SiC) RF power Metal-Semiconductor Field-Effect Transistor (MESFET). SiC has superior properties compared to silicon or gallium arsenide, including higher breakdown voltage, higher saturated electron drift velocity, and higher thermal conductivity. SiC MESFETs offer greater efficiency, greater power density, and wider bandwidths compared to Si and GaAs transistors.

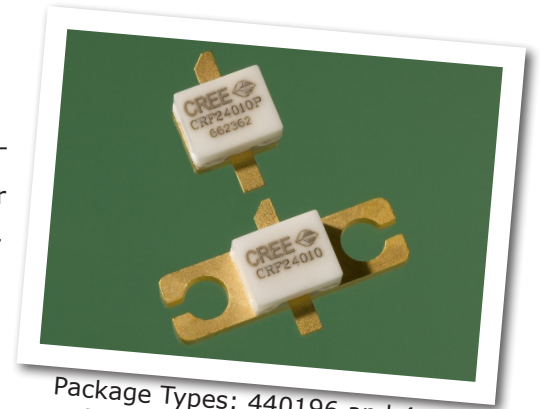

Package Types: 440196 and 440166
 PN's: CRF24010P and CRF24010F

FEATURES

- 15 dB Small Signal Gain
- High Efficiency
- 10 W minimum P_{1dB}
- Up to 2700 MHz Operation
- 48 V Operation
- High Breakdown Voltage
- High Temperature Operation

APPLICATIONS

- Wideband Military Communications
- Secure Comms for Homeland Defense
- Class A, A/B Amplifiers
- TDMA, EDGE, CDMA, W-CDMA
- Broadband Amplifiers
- MMDS

Typical Performance

- Drain Efficiency of 45% at 1950 MHz
- IMD -31 dBc at 1950 MHz
- 15 dB Gain at 1950 MHz

Note: Measured in amplifier circuit CRF24010-TB at $V_{DS} = 48\text{ V}$, $I_{DQ} = 500\text{ mA}$.





Absolute Maximum Ratings (not simultaneous) at 25 °C Case Temperature

| Parameter | Symbol | Rating | Units |
|--------------------------------------|-----------------|-----------|-------|
| Drain-source Voltage | V_{DSS} | 120 | Volts |
| Gate to source Voltage | V_{GS} | -20, +3 | Volts |
| Storage Temperature | T_{STG} | -55, +150 | °C |
| Operating Junction Temperature | T_J | 255 | °C |
| Maximum Forward Gate Current | I_{GMAX} | 6.0 | mA |
| Thermal Resistance, Junction to Case | $R_{\theta JC}$ | 5.6 | °C/W |
| Screw Torque ¹ | T | 60 | in-oz |
| Soldering Temperature | T_S | 225 | °C |

Electrical Characteristics ($T_c = 25^\circ C$)

| Characteristics | Symbol | Min. | Typ. | Max. | Units | Conditions |
|----------------------------------|---------------|--------|------|------|--------|---|
| DC Characteristics | | | | | | |
| Gate Threshold Voltage | $V_{GS(th)}$ | -12 | -10 | - | VDC | $V_{DS} = 10 V, I_D = 0.5 mA$ |
| Gate Quiescent Voltage | $V_{GS(Q)}$ | - | -9 | - | VDC | $V_{DS} = 48 V, I_D = 400 mA$ |
| Zero Gate Voltage Drain Current | I_{DSS} | 1.2 | 1.5 | 2.1 | A | $V_{DS} = 10 V, V_{GS} = 0 V$ |
| Drain-Source Breakdown Voltage | $V_{(BR)DSS}$ | 100 | - | - | VDC | $V_{GS} = 18, I_D = 10 mA$ |
| Forward Transconductance | g_m | 140 | 160 | - | mS | $V_{DS} = 48 V, I_D = 250 mA$ |
| Case Operating Temperature | T_c | -30 | - | 125 | °C | |
| RF Characteristics | | | | | | |
| Gain | G_{SS} | 13 | 15 | - | dB | $V_{DD} = 48 V, I_{DQ} = 500 mA,$ $f = 1950 MHz$ |
| Power Output at 1 dB Compression | P_{1dB} | 10 | 12 | - | W | $V_{DD} = 48 V, I_{DQ} = 500 mA,$ $f = 1950 MHz$ |
| Power Output at 3 dB Compression | P_{3dB} | 15 | 17 | - | W | $V_{DD} = 48 V, I_{DQ} = 500 mA,$ $f = 1950 MHz$ |
| Drain Efficiency ^{2,3} | η | 40 | 45 | - | % | $V_{DD} = 48 V, I_{DQ} = 250 mA, f = 1950 MHz$ $P_{OUT} = P_{1dB}$ |
| Intermodulation Distortion | IMD_3 | - | -31 | - | dBc | $V_{DD} = 48 V, I_{DQ} = 250 mA,$ $f_1 = 1950 MHz, f_2 = 1950.1 MHz,$ $P_{OUT} = 10W PEP$ |
| Minimum Noise Figure | NF_{min} | - | 3.1 | - | dB | $V_{DD} = 48 V, I_{DQ} = 500 mA,$ $f_1 = 1950 MHz$ |
| Output Mismatch Stress | VSWR | 10 : 1 | - | - | Ψ | No damage at all phase angles, $V_{DD} = 48 V, I_{DQ} = 500 mA,$ $f = 1950 MHz, P_{OUT} = 10W CW$ |
| Dynamic Characteristics | | | | | | |
| Input Capacitance | C_{DS} | - | 2.5 | - | pF | $V_{DS} = 48 V, V_{GS} = -16 V, f = 1 MHz$ |
| Output Capacitance | C_{GS} | - | 1.9 | - | pF | $V_{DS} = 48 V, V_{GS} = -16 V, f = 1 MHz$ |
| Reverse Transfer Capacitance | C_{GD} | - | 0.45 | - | pF | $V_{DS} = 48 V, V_{GS} = -16 V, f = 1 MHz$ |

Notes:

¹ Torque for the 440166 package type.

² Drain Efficiency = P_{OUT} / P_{DC}

³ Power Added Efficiency (PAE) = $(P_{OUT} - P_{IN}) / P_{DC}$




Electrostatic Discharge (ESD) Classifications

| Parameter | Symbol | Class | Test Methodology |
|---------------------|--------|-------|------------------|
| Human Body Model | HBM | 1B | JESD22-A114 |
| Charge Device Model | CDM | C5 | JESD22-C101 |

Typical Broadband Performance

Swept P1dB and Gain vs Frequency Performance of CRF24010 in a Broadband Amplifier Circuit
 $V_{DD} = 48\text{ V}$, $I_{DQ} = 500\text{ mA}$, $T_C = 25^\circ\text{ C}$

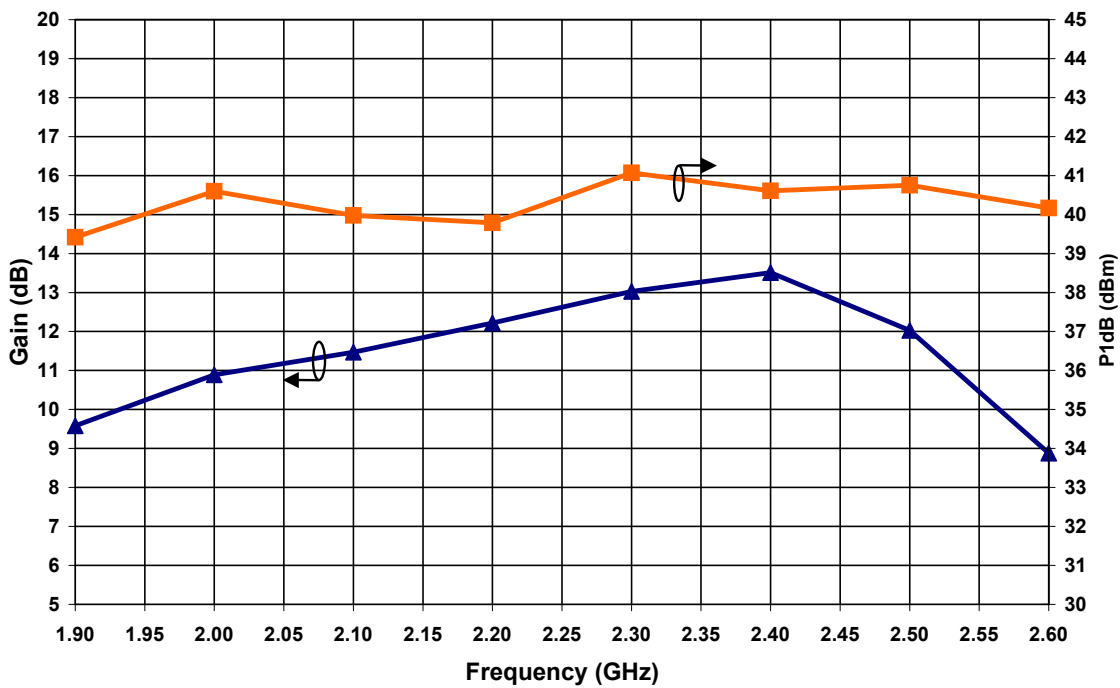


Note: The chart on this page displays the performance achievable with the CRF24010 product when a broadband amplifier is designed to operate from 1.7 GHz to 2.1 GHz.




Typical Performance Data from the CRF24010-TB Demonstration Amplifier


Performance of CRF24010 in Narrowband Amplifier Circuit CRF24010-TB
 $V_{DD} = 48\text{ V}$, $I_{DQ} = 500\text{ mA}$, $T_C = 25^\circ\text{C}$, Frequency = 1950 MHz

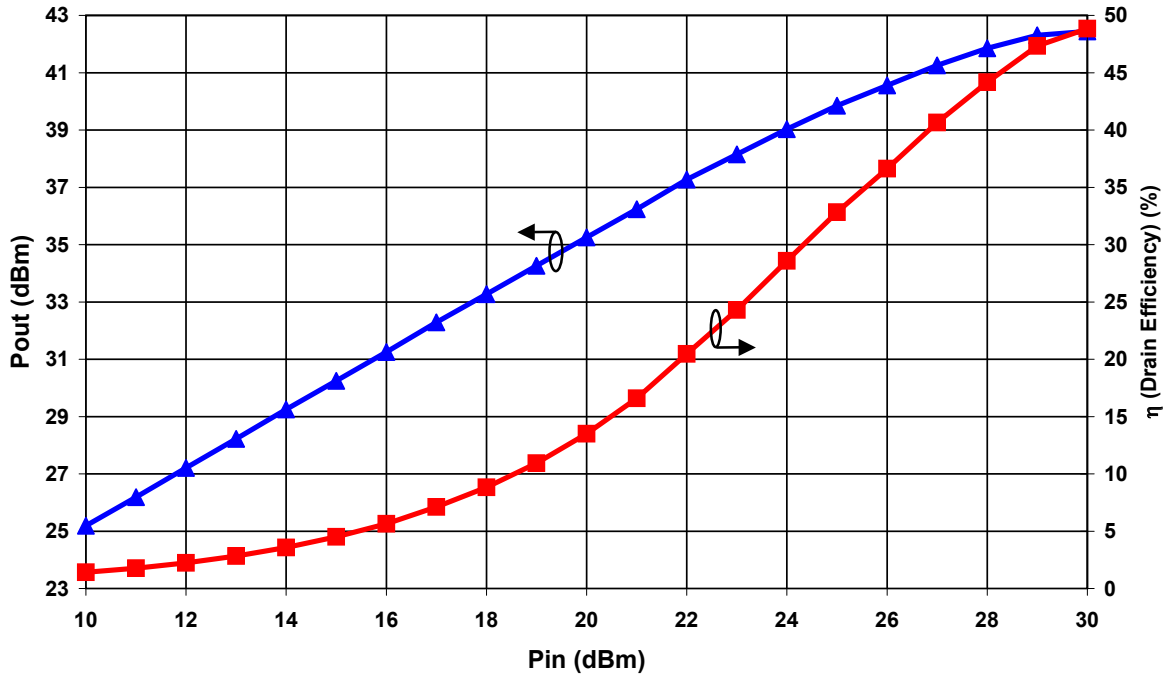

Swept CW Data vs Frequency Performance of CRF24010 in a Narrowband Amplifier Circuit CRF24010-TB
 $V_{DD} = 48\text{ V}$, $I_{DQ} = 500\text{ mA}$, $T_C = 25^\circ\text{C}$

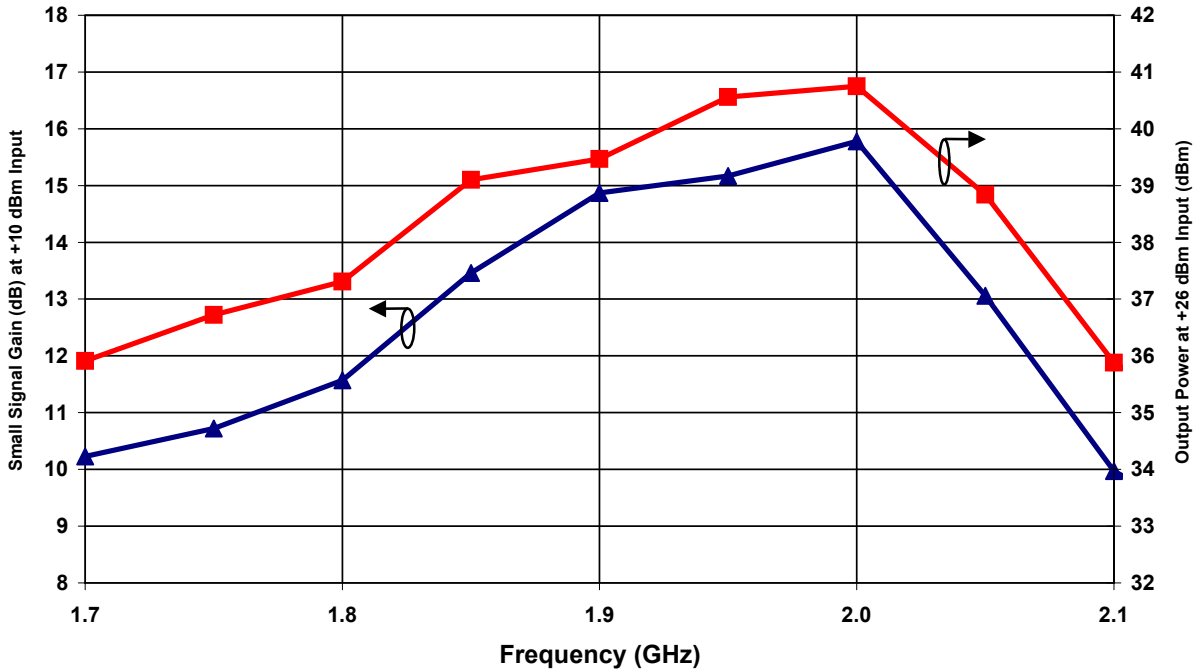

CRF24010-TB Demonstration Test Fixture Schematic

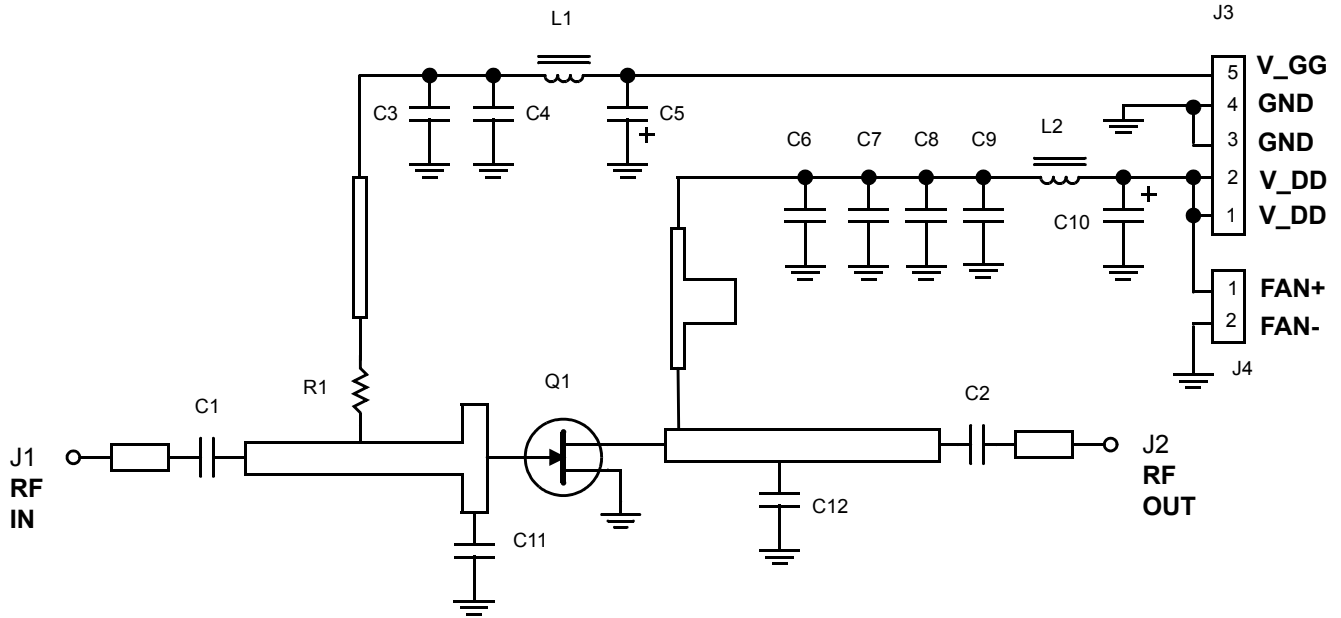


CRF24010-TB Demonstration Test Fixture Bill of Materials


| Designator | Description | Qty |
|-------------|---|-----|
| C1,C2,C3,C6 | CAP, 27pF, 0603, ATC600S270JW250XT | 4 |
| C4 | CAP, 0.1uF, 25V, 0805, CERAMIC | 1 |
| C5 | CAP, 10uF, 25V, TANTALUM | 1 |
| C7 | CAP, 2.2nF, 100V, AVX08051C222MAT2A | 1 |
| C8 | CAP, 10nF, 100V, 0805, CERAMIC | 1 |
| C9 | CAP, 0.1uF, 100V, 1206 CERAMIC | 1 |
| C10 | CAP, 33uF, 100V, ALUMINUM ELECTROLYTIC | 1 |
| C11 | CAP, 3.9pF, 150V, PORCELAIN, ATC-100B3R9OBW500X | 1 |
| C12 | CAP, 2.4pF, 150V, PORCELAIN, ATC-100B2R4OBW500X | 1 |
| R1 | RES, 39 OHM, 0.1W, 0805 | 1 |
| L1 | FERRITE, 80 OHM, STEWARD HI1206K101R | 1 |
| L2 | FERRITE, MURATA BLM21P220SG | 1 |
| J1,J2 | CONNECTOR, SMA, FLANGE MOUNT, FEMALE | 2 |
| J3 | CONNECTOR, MOLEX, 5-PIN, MALE | 1 |
| J4 | CONNECTOR, MOLEX, 2-PIN, MALE | 1 |
| Q1 | CRF24010 | 1 |

Note: Some values may differ due to substitution in the event of temporarily unavailable parts.

CRF24010-TB Demonstration Test Fixture

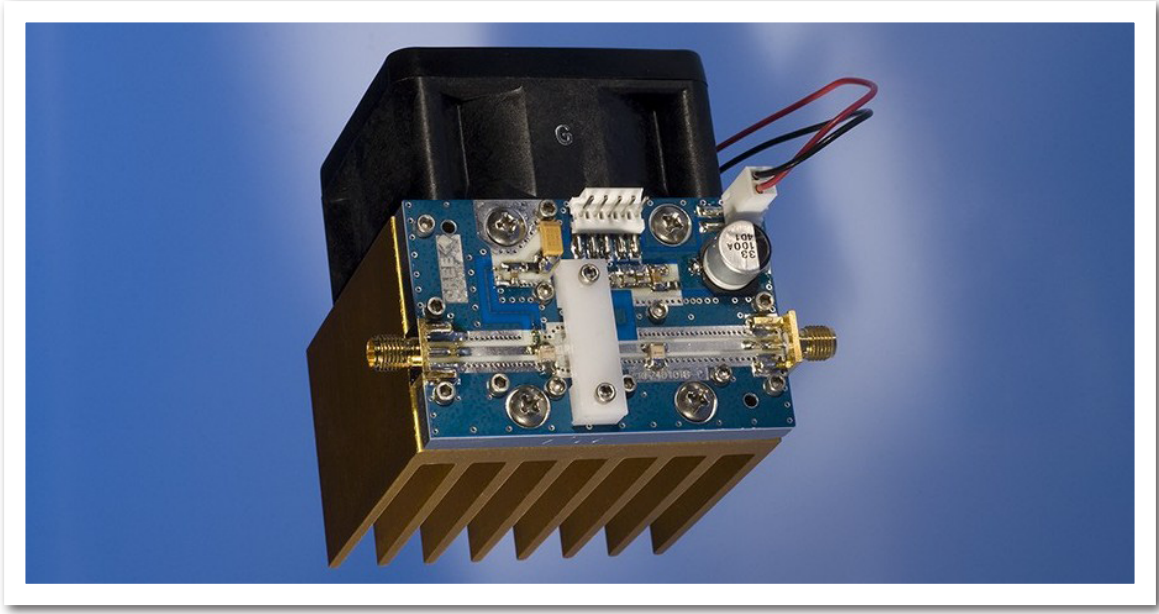

CRF24010-TB Demonstration Test Fixture Diagram

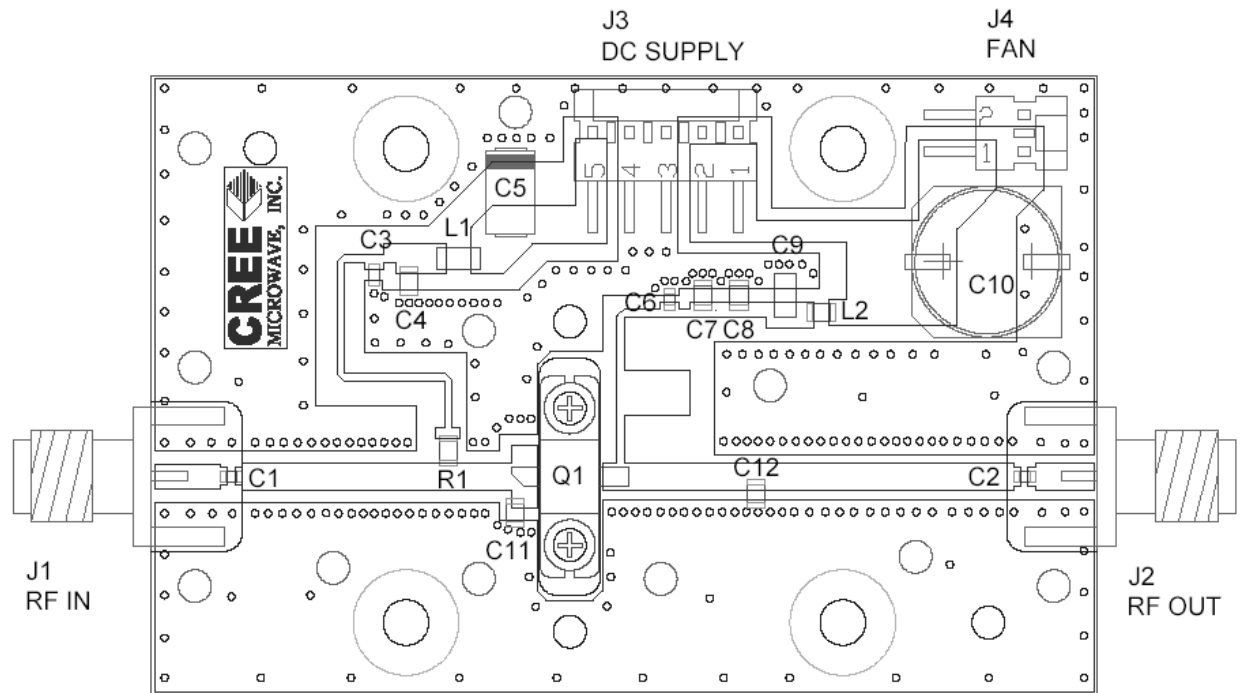



Typical Package S-Parameters
(Small Signal, $V_{DS} = 48\text{ V}$, $I_{DQ} = 250\text{ mA}$, magnitude / angle)

| Frequency | S(1,1) | S(2,1) | S(1,2) | S(2,2) |
|-----------|------------------|-----------------|-----------------|------------------|
| 100.0MHz | 0.935 / -22.097 | 7.829 / 165.893 | 0.024 / 73.361 | 0.341 / -26.953 |
| 200.0MHz | 0.920 / -42.676 | 7.370 / 152.734 | 0.045 / 62.187 | 0.356 / -50.854 |
| 300.0MHz | 0.900 / -60.781 | 6.758 / 141.088 | 0.062 / 51.523 | 0.374 / -70.354 |
| 400.0MHz | 0.881 / -76.139 | 6.110 / 131.067 | 0.074 / 42.232 | 0.392 / -85.633 |
| 500.0MHz | 0.865 / -88.933 | 5.497 / 122.511 | 0.083 / 34.306 | 0.407 / -97.471 |
| 600.0MHz | 0.852 / -99.537 | 4.950 / 115.167 | 0.090 / 27.540 | 0.420 / -106.682 |
| 700.0MHz | 0.842 / -108.354 | 4.474 / 108.786 | 0.095 / 21.708 | 0.431 / -113.933 |
| 800.0MHz | 0.834 / -115.739 | 4.064 / 103.160 | 0.098 / 16.614 | 0.441 / -119.725 |
| 900.0MHz | 0.828 / -121.985 | 3.712 / 98.128 | 0.101 / 12.099 | 0.450 / -124.423 |
| 1.000GHz | 0.824 / -127.324 | 3.408 / 93.564 | 0.103 / 8.043 | 0.458 / -128.294 |
| 1.100GHz | 0.821 / -131.937 | 3.146 / 89.373 | 0.104 / 4.354 | 0.466 / -131.533 |
| 1.200GHz | 0.819 / -135.963 | 2.917 / 85.485 | 0.105 / 0.962 | 0.473 / -134.284 |
| 1.300GHz | 0.818 / -139.514 | 2.717 / 81.845 | 0.106 / -2.188 | 0.481 / -136.655 |
| 1.400GHz | 0.818 / -142.674 | 2.541 / 78.410 | 0.107 / -5.136 | 0.488 / -138.729 |
| 1.500GHz | 0.818 / -145.513 | 2.385 / 75.148 | 0.107 / -7.916 | 0.495 / -140.568 |
| 1.600GHz | 0.818 / -148.084 | 2.246 / 72.032 | 0.107 / -10.553 | 0.502 / -142.219 |
| 1.700GHz | 0.818 / -150.432 | 2.121 / 69.041 | 0.107 / -13.067 | 0.509 / -143.721 |
| 1.800GHz | 0.819 / -152.591 | 2.009 / 66.159 | 0.108 / -15.476 | 0.516 / -145.104 |
| 1.900GHz | 0.820 / -154.592 | 1.908 / 63.373 | 0.108 / -17.792 | 0.523 / -146.390 |
| 2.000GHz | 0.821 / -156.457 | 1.816 / 60.670 | 0.108 / -20.028 | 0.530 / -147.598 |
| 2.100GHz | 0.823 / -158.208 | 1.733 / 58.043 | 0.107 / -22.191 | 0.537 / -148.744 |
| 2.200GHz | 0.824 / -159.860 | 1.657 / 55.482 | 0.107 / -24.290 | 0.544 / -149.838 |
| 2.300GHz | 0.826 / -161.428 | 1.587 / 52.981 | 0.107 / -26.332 | 0.550 / -150.892 |
| 2.400GHz | 0.824 / -162.924 | 1.523 / 50.536 | 0.107 / -28.322 | 0.557 / -151.911 |
| 2.500GHz | 0.829 / -164.358 | 1.464 / 48.139 | 0.107 / -30.265 | 0.563 / -152.904 |
| 2.600GHz | 0.831 / -165.738 | 1.410 / 45.789 | 0.107 / -32.166 | 0.569 / -153.875 |
| 2.700GHz | 0.832 / -167.073 | 1.360 / 43.479 | 0.107 / -34.029 | 0.575 / -154.829 |
| 2.800GHz | 0.834 / -168.368 | 1.314 / 41.208 | 0.106 / -35.856 | 0.581 / -155.768 |
| 2.900GHz | 0.836 / -169.630 | 1.271 / 38.972 | 0.106 / -37.652 | 0.587 / -156.696 |
| 3.000GHz | 0.837 / -170.865 | 1.231 / 36.767 | 0.106 / -39.418 | 0.592 / -157.616 |
| 3.100GHz | 0.839 / -172.075 | 1.194 / 34.593 | 0.106 / -41.158 | 0.597 / -158.529 |
| 3.200GHz | 0.841 / -173.266 | 1.160 / 32.446 | 0.106 / -42.874 | 0.602 / -159.437 |
| 3.300GHz | 0.842 / -174.441 | 1.127 / 30.323 | 0.106 / -44.569 | 0.607 / -160.342 |
| 3.400GHz | 0.844 / -175.604 | 1.098 / 28.223 | 0.106 / -46.244 | 0.612 / -161.246 |
| 3.500GHz | 0.845 / -176.757 | 1.070 / 26.145 | 0.106 / -47.902 | 0.616 / -162.148 |
| 3.600GHz | 0.846 / -177.904 | 1.044 / 24.085 | 0.106 / -49.544 | 0.621 / -163.051 |
| 3.700GHz | 0.848 / -179.046 | 1.020 / 22.042 | 0.106 / -51.173 | 0.625 / -163.955 |
| 3.800GHz | 0.849 / 179.813 | 0.997 / 20.014 | 0.106 / -52.790 | 0.628 / -164.862 |
| 3.900GHz | 0.850 / 178.671 | 0.976 / 17.999 | 0.106 / -54.398 | 0.632 / -165.772 |
| 4.000GHz | 0.852 / 177.526 | 0.957 / 15.996 | 0.106 / -55.998 | 0.635 / -166.687 |

Download this s-parameter file in ".s2p" format at http://www.cree.com/products/wireless_s-parameters.asp




Typical Package S-Parameters
(Small Signal, $V_{DS} = 48\text{ V}$, $I_{DQ} = 500\text{ mA}$, magnitude / angle)

| Frequency | S(1,1) | S(2,1) | S(1,2) | S(2,2) |
|-----------|------------------|-----------------|-----------------|------------------|
| 100.0MHz | 0.933 / -24.697 | 9.470 / 164.826 | 0.022 / 72.184 | 0.281 / -34.171 |
| 200.0MHz | 0.917 / -47.336 | 8.814 / 150.896 | 0.041 / 60.244 | 0.311 / -62.220 |
| 300.0MHz | 0.898 / -66.755 | 7.970 / 138.866 | 0.055 / 49.176 | 0.344 / -83.098 |
| 400.0MHz | 0.881 / -82.780 | 7.113 / 128.773 | 0.066 / 39.787 | 0.372 / -98.337 |
| 500.0MHz | 0.867 / -95.802 | 6.332 / 120.339 | 0.073 / 31.953 | 0.394 / -109.583 |
| 600.0MHz | 0.856 / -106.375 | 5.654 / 113.216 | 0.078 / 25.378 | 0.411 / -118.050 |
| 700.0MHz | 0.847 / -115.027 | 5.079 / 107.100 | 0.082 / 19.781 | 0.425 / -124.563 |
| 800.0MHz | 0.841 / -122.187 | 4.592 / 101.752 | 0.084 / 14.932 | 0.436 / -129.678 |
| 900.0MHz | 0.837 / -128.190 | 4.179 / 96.993 | 0.086 / 10.659 | 0.445 / -133.774 |
| 1.000GHz | 0.834 / -133.288 | 3.828 / 92.961 | 0.088 / 6.834 | 0.454 / -137.115 |
| 1.100GHz | 0.831 / -137.674 | 3.526 / 88.750 | 0.089 / 3.362 | 0.462 / -139.886 |
| 1.200GHz | 0.830 / -141.491 | 3.266 / 85.096 | 0.090 / 0.172 | 0.469 / -142.221 |
| 1.300GHz | 0.829 / -144.852 | 3.039 / 81.675 | 0.090 / -2.790 | 0.475 / -144.221 |
| 1.400GHz | 0.829 / -147.841 | 2.840 / 78.445 | 0.091 / -5.564 | 0.482 / -145.960 |
| 1.500GHz | 0.828 / -150.526 | 2.665 / 75.375 | 0.091 / -8.183 | 0.488 / -147.492 |
| 1.600GHz | 0.829 / -152.959 | 2.509 / 72.440 | 0.091 / -10.671 | 0.495 / -148.863 |
| 1.700GHz | 0.829 / -155.183 | 2.370 / 69.618 | 0.091 / -13.047 | 0.501 / -150.104 |
| 1.800GHz | 0.830 / -157.231 | 2.246 / 66.896 | 0.091 / -15.328 | 0.507 / -151.244 |
| 1.900GHz | 0.830 / -159.132 | 2.133 / 64.258 | 0.091 / -17.526 | 0.513 / -152.301 |
| 2.000GHz | 0.831 / -160.907 | 2.032 / 61.696 | 0.091 / -19.652 | 0.519 / -153.294 |
| 2.100GHz | 0.832 / -162.576 | 1.940 / 59.200 | 0.091 / -21.714 | 0.525 / -154.235 |
| 2.200GHz | 0.833 / -164.155 | 1.855 / 56.763 | 0.091 / -23.720 | 0.530 / -155.136 |
| 2.300GHz | 0.834 / -165.657 | 1.778 / 54.379 | 0.091 / -25.676 | 0.536 / -156.004 |
| 2.400GHz | 0.836 / -167.092 | 1.708 / 52.042 | 0.091 / -27.587 | 0.542 / -156.847 |
| 2.500GHz | 0.837 / -168.471 | 1.643 / 49.748 | 0.091 / -29.458 | 0.547 / -157.670 |
| 2.600GHz | 0.838 / -169.802 | 1.583 / 47.492 | 0.091 / -31.294 | 0.552 / -158.479 |
| 2.700GHz | 0.839 / -171.093 | 1.528 / 45.273 | 0.091 / -33.096 | 0.558 / -159.277 |
| 2.800GHz | 0.840 / -172.348 | 1.477 / 43.085 | 0.091 / -34.870 | 0.563 / -160.067 |
| 2.900GHz | 0.842 / -173.575 | 1.430 / 40.926 | 0.091 / -36.616 | 0.568 / -160.852 |
| 3.000GHz | 0.843 / -174.777 | 1.386 / 38.795 | 0.091 / -38.340 | 0.572 / -161.634 |
| 3.100GHz | 0.844 / -175.960 | 1.346 / 36.687 | 0.091 / -40.041 | 0.577 / -162.415 |
| 3.200GHz | 0.845 / -177.126 | 1.308 / 34.602 | 0.091 / -41.724 | 0.581 / -163.197 |
| 3.300GHz | 0.846 / -178.281 | 1.273 / 32.537 | 0.091 / -43.390 | 0.586 / -163.981 |
| 3.400GHz | 0.848 / -179.426 | 1.240 / 30.490 | 0.091 / -45.041 | 0.590 / -164.768 |
| 3.500GHz | 0.849 / 179.435 | 1.210 / 28.259 | 0.091 / -46.679 | 0.594 / -165.559 |
| 3.600GHz | 0.850 / 178.299 | 1.181 / 26.443 | 0.091 / -48.306 | 0.597 / -166.355 |
| 3.700GHz | 0.851 / 177.164 | 1.155 / 24.440 | 0.091 / -49.924 | 0.601 / -167.157 |
| 3.800GHz | 0.852 / 176.027 | 1.130 / 22.447 | 0.091 / -51.534 | 0.604 / -167.96 |
| 3.900GHz | 0.853 / 174.886 | 1.107 / 20.464 | 0.091 / -53.138 | 0.607 / -168.783 |
| 4.000GHz | 0.853 / 173.738 | 1.086 / 18.489 | 0.091 / -54.738 | 0.610 / -169.607 |

Download this s-parameter file in ".s2p" format at http://www.cree.com/products/wireless_s-parameters.asp

Product Dimensions - CRF24010P (Package Type — 440196)

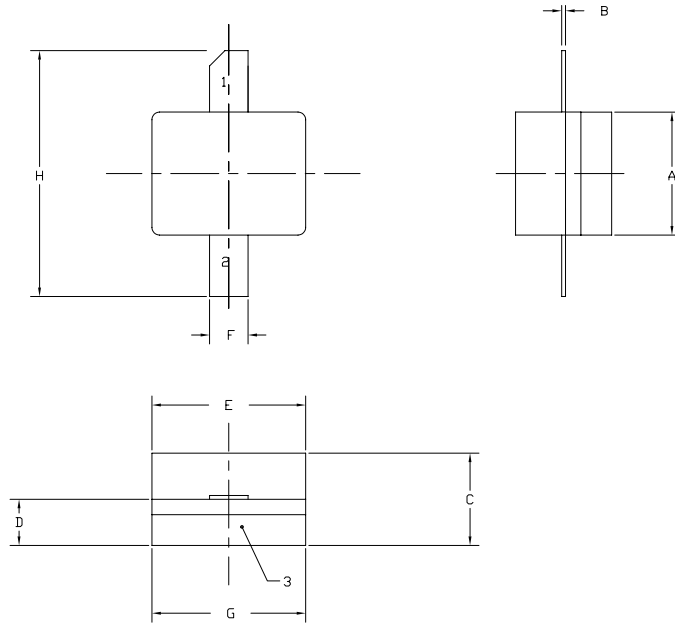


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. ADHESIVE FROM LID MAY EXTEND A MAXIMUM OF 0.020" BEYOND EDGE OF LID.
4. LID MAY BE MISALIGNED TO THE BODY OF THE PACKAGE BY A MAXIMUM OF 0.008" IN ANY DIRECTION.
5. ALL PLATED SURFACES ARE NI/AU.

| DIM | INCHES | | MILLIMETERS | |
|-----|--------|-------|-------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.155 | 0.165 | 3.94 | 4.19 |
| B | 0.003 | 0.006 | 0.10 | 0.15 |
| C | 0.115 | 0.135 | 2.92 | 3.17 |
| D | 0.057 | 0.067 | 1.45 | 1.70 |
| E | 0.195 | 0.205 | 4.95 | 5.21 |
| F | 0.045 | 0.055 | 1.14 | 1.40 |
| G | 0.195 | 0.205 | 4.95 | 5.21 |
| H | 0.280 | 0.360 | 7.112 | 9.114 |

- PIN 1. GATE
 PIN 2. DRAIN
 PIN 3. SOURCE

Product Dimensions - CRF24010F (Package Type — 440166)

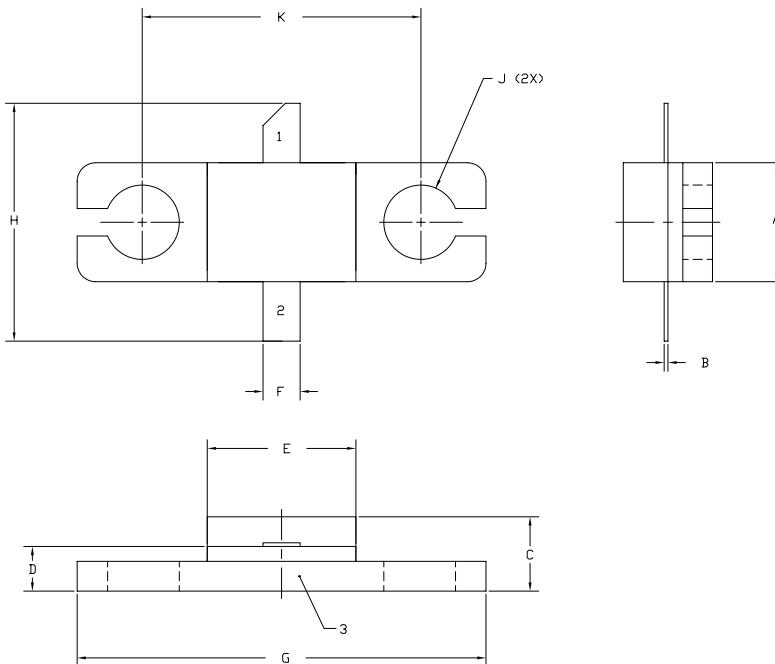

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. ADHESIVE FROM LID MAY EXTEND A MAXIMUM OF 0.020" BEYOND EDGE OF LID.
4. LID MAY BE MISALIGNED TO THE BODY OF THE PACKAGE BY A MAXIMUM OF 0.008" IN ANY DIRECTION.
5. ALL PLATED SURFACES ARE NI/AU.

| DIM | INCHES | | MILLIMETERS | |
|-----|--------|-------|-------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.155 | 0.165 | 3.94 | 4.19 |
| B | 0.004 | 0.006 | 0.10 | 0.15 |
| C | 0.115 | 0.135 | 2.92 | 3.43 |
| D | 0.057 | 0.067 | 1.45 | 1.70 |
| E | 0.195 | 0.205 | 4.95 | 5.21 |
| F | 0.045 | 0.055 | 1.14 | 1.40 |
| G | 0.545 | 0.555 | 13.84 | 14.09 |
| H | 0.280 | 0.360 | 7.87 | 8.38 |
| J | ø .100 | | 2.54 | |
| K | 0.375 | | 9.53 | |

- PIN 1. GATE
 PIN 2. DRAIN
 PIN 3. SOURCE



Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications, and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended, or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death, or in applications for planning, construction, maintenance or direct operation of a nuclear facility. Cree and the Cree logo are registered trademarks of Cree, Inc.

For more information, please contact:

Cree, Inc.
4600 Silicon Drive
Durham, NC 27703
www.cree.com/wireless

Ryan Baker
Cree, Marketing
919.287.7816

Tom Dekker
Cree, Sales Director
919.313.5639