



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



STRADA-IP-2X6-VSM

IESNA Type V (square) beam for wide area lighting such as car parks


TECHNICAL SPECIFICATIONS:

Dimensions	173.0 x 71.4 mm
Height	8 mm
Fastening	screw
Colour	clear
Box size	476 x 273 x 247 mm
Box weight	6.6 kg
Quantity in Box	120 pcs
ROHS compliant	yes ⓘ


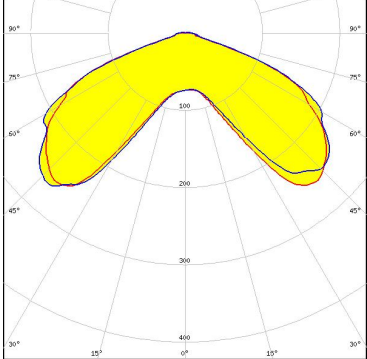




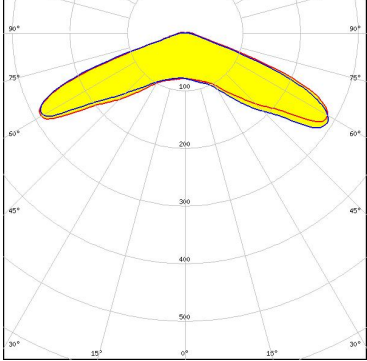

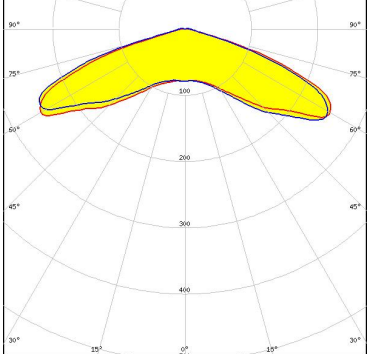


MATERIAL SPECIFICATIONS:

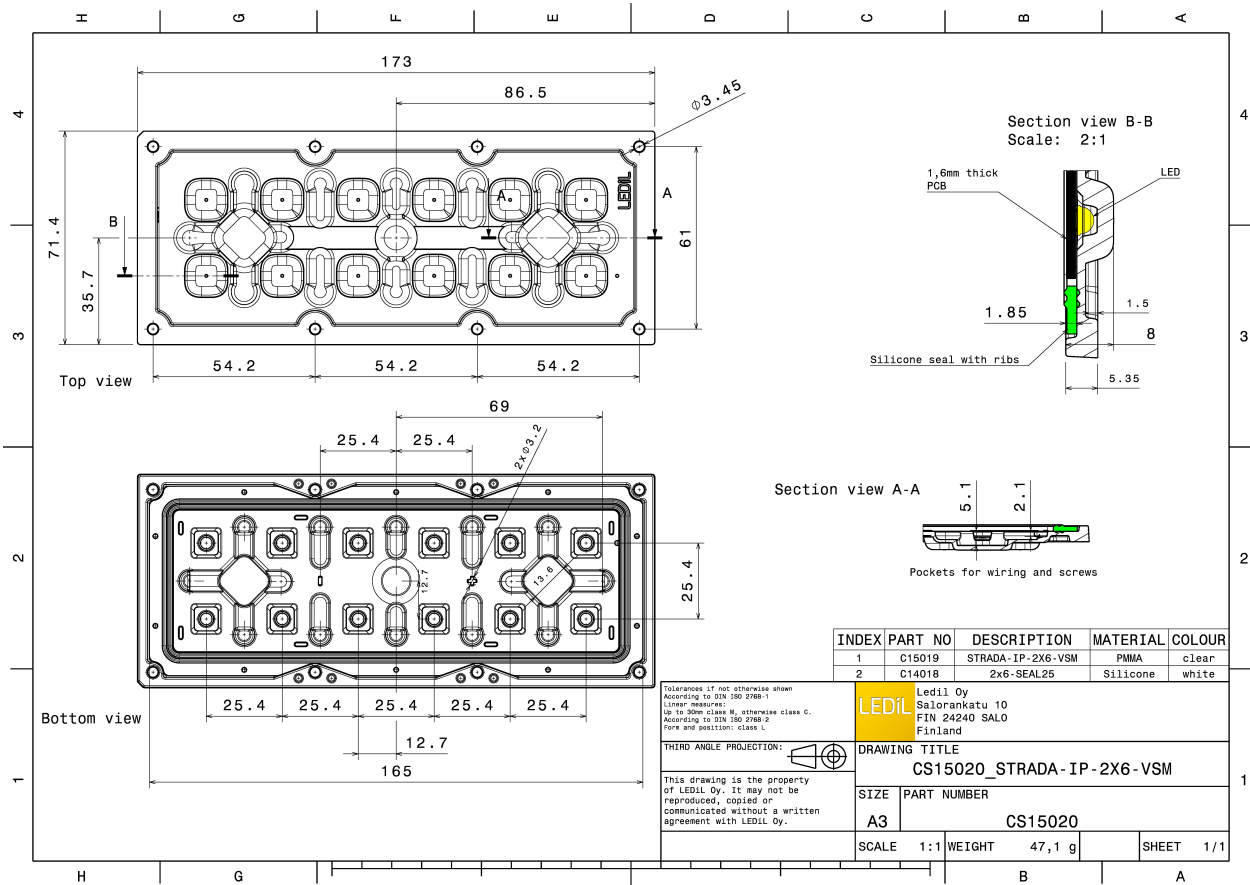Component	Type	Material	Colour
STRADA-IP-2X6-VSM	Lens	PMMA	clear
2X6-SEAL25	Seal	Silicone	white




PHOTOMETRIC DATA (MEASURED):
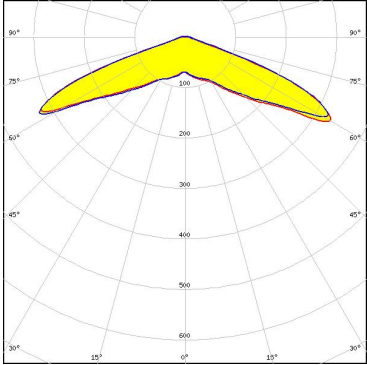
<p> LED SMD 5050 FWHM 136.0° Efficiency 94 % Peak intensity 0.350 cd/lm Required components:</p>		
<p> LED XP-G2 FWHM 140.0° Efficiency % Peak intensity 0.550 cd/lm Required components:</p>		
<p> LED XP-G3 FWHM 141.0° Efficiency 94 % Peak intensity 0.460 cd/lm Required components:</p>		
<p> LED XP-L FWHM 145.0° Efficiency 94 % Peak intensity 0.410 cd/lm Required components:</p>		


PHOTOMETRIC DATA (MEASURED):




LED XP-L2
FWHM 142.0°
Efficiency 94 %
Peak intensity 0.380 cd/lm
Required components:

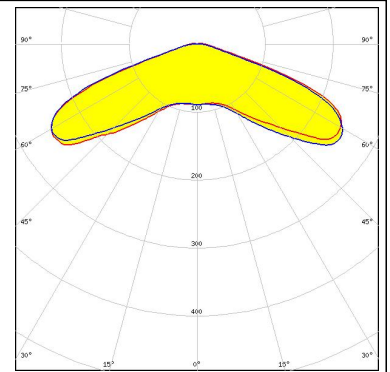


LED XT-E
FWHM 142.0°
Efficiency 94 %
Peak intensity 0.470 cd/lm
Required components:

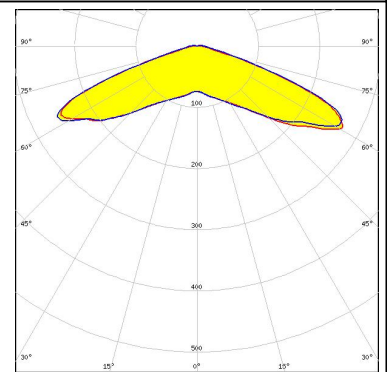

LED H35C1 (LEMWA33)
FWHM 140.0°
Efficiency 94 %
Peak intensity 0.520 cd/lm
Required components:

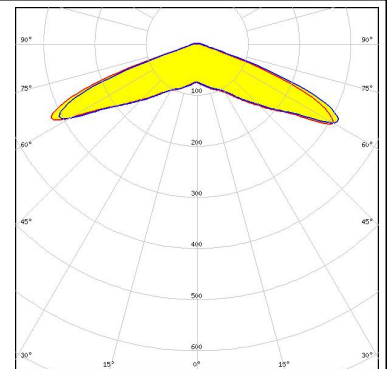


LED LUXEON T
FWHM 137.0°
Efficiency 94 %
Peak intensity 0.540 cd/lm
Required components:

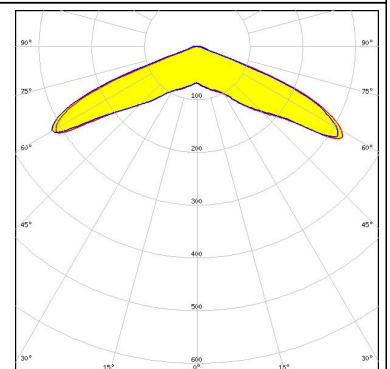

PHOTOMETRIC DATA (MEASURED):


LUMILEDS

LED LUXEON V
 FWHM 139.0°
 Efficiency 94 %
 Peak intensity 0.400 cd/lm
 Required components:

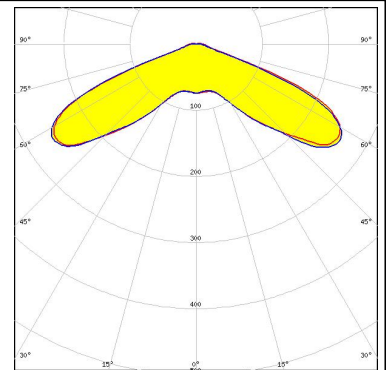


LUMILEDS

LED LUXEON XR-TX (L2T0-xyy012M)
 FWHM 137.0°
 Efficiency 94 %
 Peak intensity 0.540 cd/lm
 Required components:

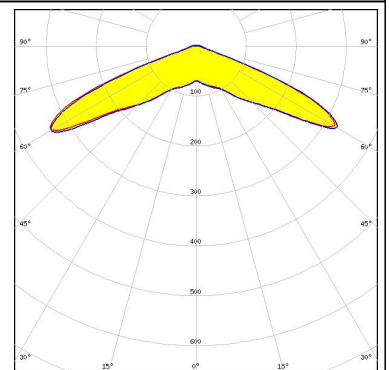



NICHIA

LED NVSxx19B/NVSxx19C
 FWHM 140.0°
 Efficiency 94 %
 Peak intensity 0.500 cd/lm
 Required components:

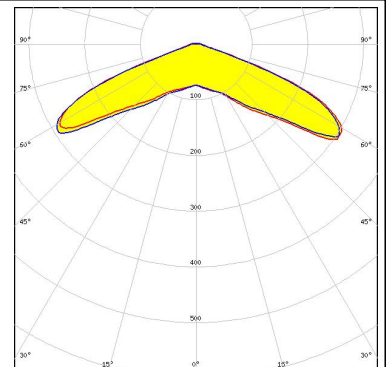

OSRAM Opto Semiconductors


LED Duris S8
 FWHM 137.0°
 Efficiency 94 %
 Peak intensity 0.370 cd/lm
 Required components:

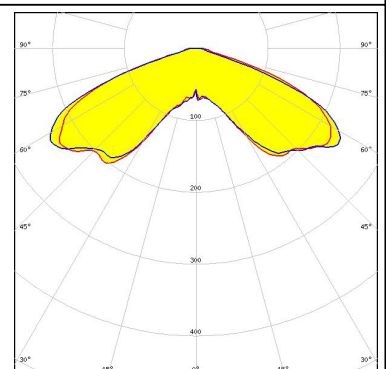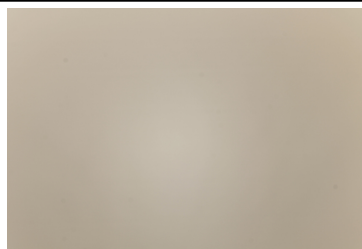

PHOTOMETRIC DATA (MEASURED):


PHILIPS

LED Fortimo FastFlex LED board 2x6 DP G4
 FWHM 140.0°
 Efficiency 94 %
 Peak intensity 0.550 cd/lm
 Required components:

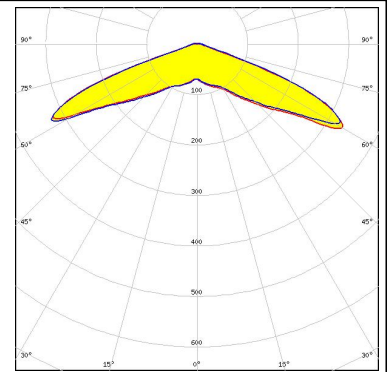


SEOUL SEMICONDUCTOR

LED SMJQ-D36W12Mx
 FWHM 131.0°
 Efficiency 94 %
 Peak intensity 0.470 cd/lm
 Required components:

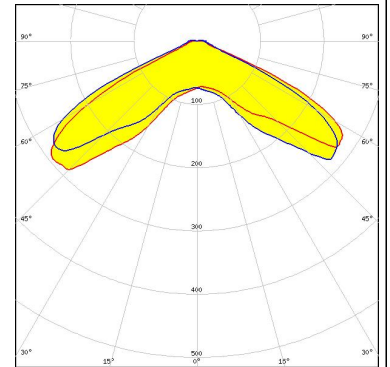


SEOUL SEMICONDUCTOR

LED SMJQ-D36W12Px
 FWHM 137.0°
 Efficiency 94 %
 Peak intensity 0.460 cd/lm
 Required components:

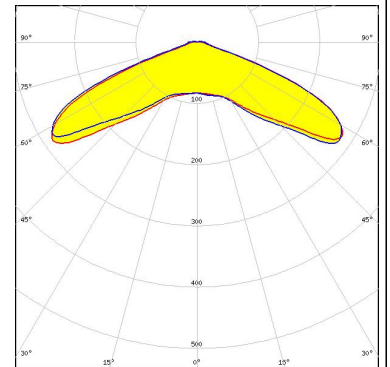
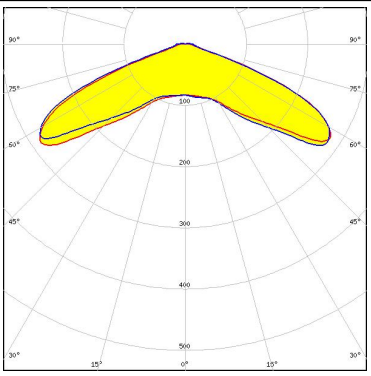
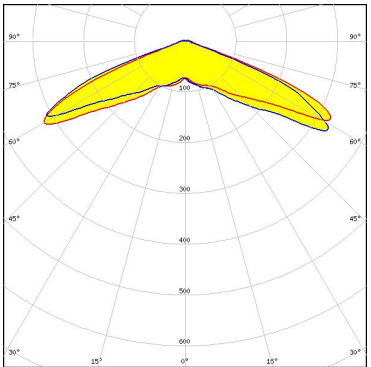


SEOUL SEMICONDUCTOR

LED Z8Y22
 FWHM 131.0°
 Efficiency 94 %
 Peak intensity 0.470 cd/lm
 Required components:

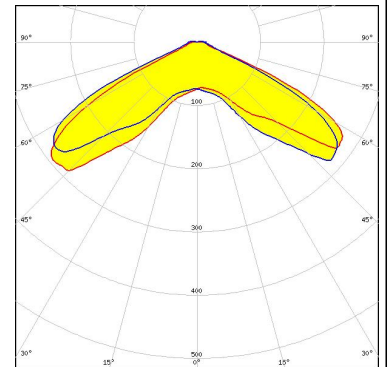


PHOTOMETRIC DATA (MEASURED):

<p> SEUL SEMICONDUCTOR</p> <p>LED Z8Y22P FWHM 137.0° Efficiency 94 % Peak intensity 0.460 cd/lm Required components:</p>	
<p>TRIDONIC</p> <p>LED RLE G2 HP 2x6 3000lm FWHM 138.0° Efficiency 94 % Peak intensity 0.560 cd/lm Required components:</p>	


PHOTOMETRIC DATA (SIMULATED):




LED XHP35 HD
FWHM 157.0°
Efficiency 93 %
Peak intensity 0.280 cd/lm
Required components:

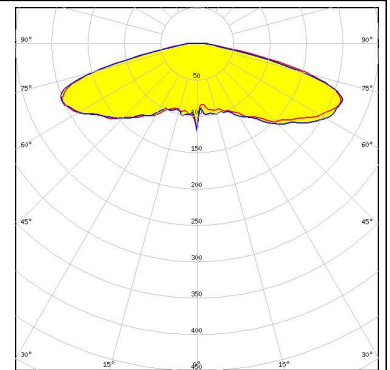


LED LUXEON 5050
FWHM 143.0°
Efficiency 92 %
Peak intensity 0.320 cd/lm
Required components:

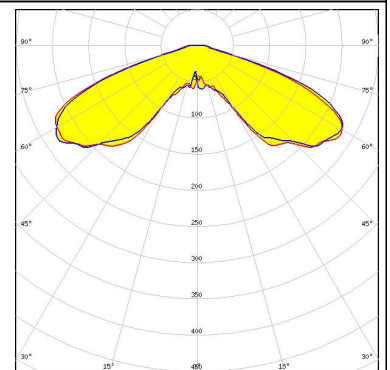

LED NVSxE21A
FWHM 136.0°
Efficiency 93 %
Peak intensity 0.520 cd/lm
Required components:

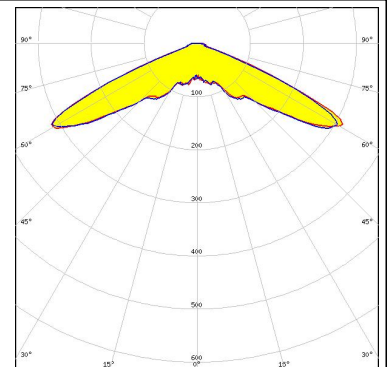

LED OSCONIQ P 3737 (3W version)
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.380 cd/lm
Required components:

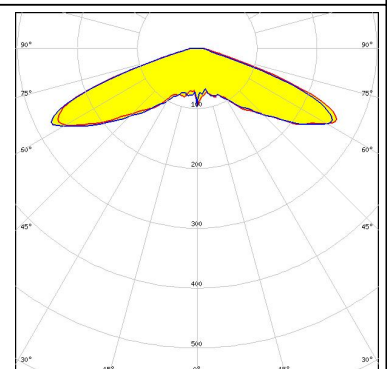

PHOTOMETRIC DATA (SIMULATED):

OSRAM

Opto Semiconductors


LED Oslon Square Gen3

FWHM 142.0°

Efficiency 91 %

Peak intensity 0.400 cd/lm

Required components:

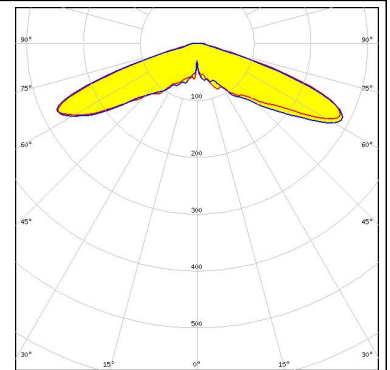

OSRAM

Opto Semiconductors


LED Oslon SSL 150

FWHM 145.0°

Efficiency 93 %

Peak intensity 0.430 cd/lm

Required components:

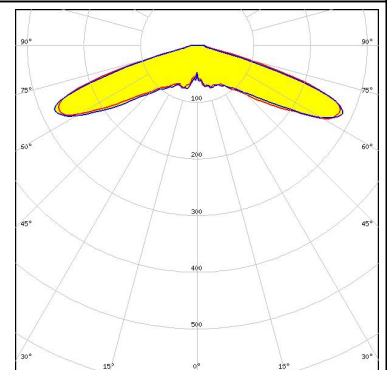

PHILIPS


LED Fortimo FastFlex LED board 2x6 DPX G4

FWHM 144.0°

Efficiency 89 %

Peak intensity 0.380 cd/lm

Required components:

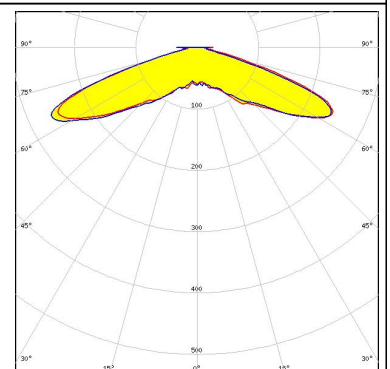

SAMSUNG


LED LH351C

FWHM Asymmetric

Efficiency 94 %

Peak intensity 0.410 cd/lm


Required components:

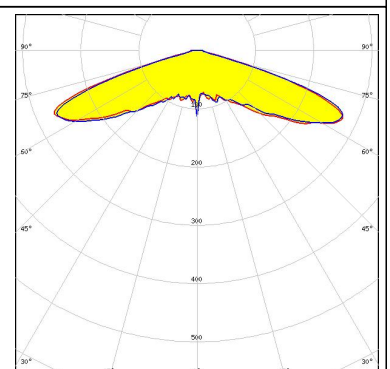

PHOTOMETRIC DATA (SIMULATED):


SAMSUNG

LED LH351D
FWHM 156.0°
Efficiency 94 %
Peak intensity 0.330 cd/lm
Required components:

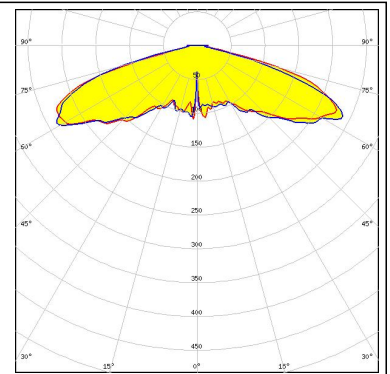

SEOUL SEMICONDUCTOR

LED Z5M1/Z5M2
FWHM 131.0°
Efficiency 92 %
Peak intensity 0.510 cd/lm
Required components:

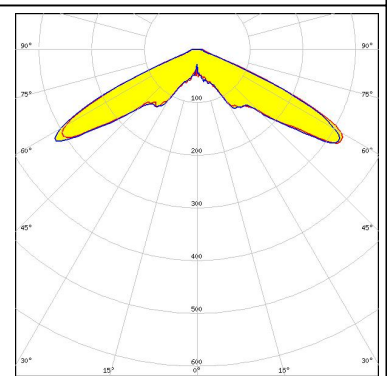

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)