



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832




Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## CSR-1575 - Cable Strip & Ring Tool - Data Sheet

The CSR-1575 is designed to slit and Ring cables, buffer tubes and jackets on fiber optic cables up to 7.5mm in diameter. The tool features an easily adjustable slit blade and ring blade as well as a removable V block that improves slitting performance.

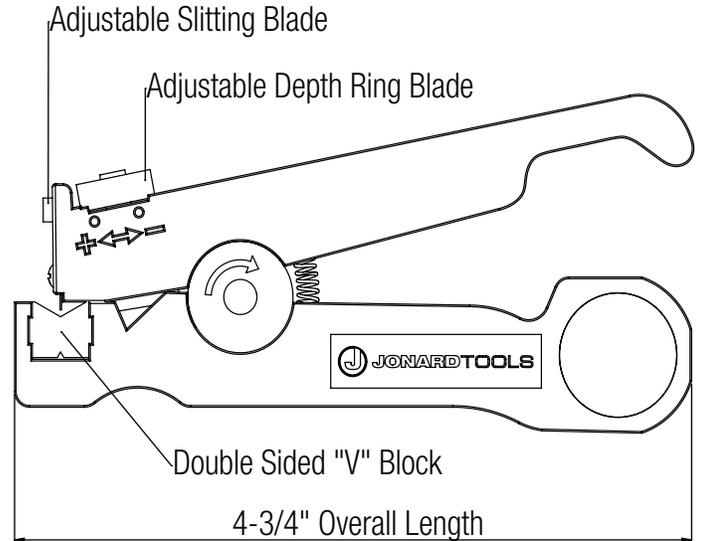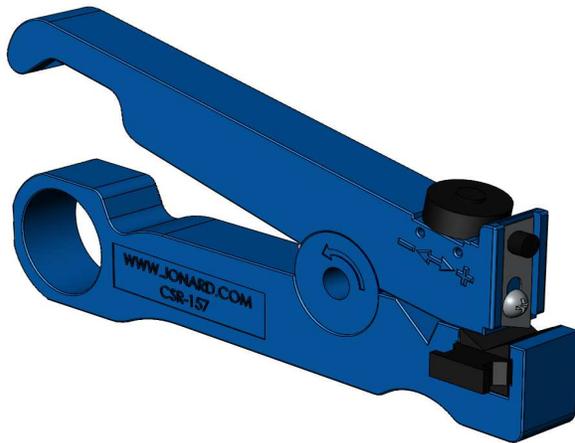

### Simple to use:

- Ringing a cable: Ring blade is easily adjustable using the adjustment knob. Rotate the knob toward the “+” sign to increase cutting blade depth and rotate the knob toward the “-” sign to decrease cutting depth. Once depth is determined open jaw, insert cable, rotate tool around cable 3 times, open jaw and remove cable, pull off jacket.
- Slitting a cable: First select which V groove is needed on the V block, we recommend using the small V groove for cables 3mm or smaller and use the large V groove for cable larger than 3mm. To remove V block simply push on the V block, remove from tool.
- Select groove then push V block back into tool. Set the depth of the slitting blade by loosening the screw holding the blade in place, use the tab on the blade to move the blade up or down to the desired slitting depth, tighten screw. Open jaw, insert cable to be slit, close jaw and pull.

### Specifications

Cut Type	Ring, Slit
Cable Type	Jacket
Cable Diameter	1.2-7.5 mm
Weight	0.132 lbs
UPC No.	811490016552