



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Part No: CST-911AP

Description: magnetic buzzer

Date: 1/30/2006

Unit: mm

Page No: 1 of 4


SCOPE

This specification applies to magnetic buzzer, CST-911AP

SPECIFICATION

| No. | Item | Unit | Specification | Condition |
|-----|-------------------------------------|--------------|--------------------------|--|
| 1 | Rated Voltage | Vo-p | 1.5 | |
| 2 | Operating Volt. | Vo-p | 1.0~2.0 | |
| 3 | Mean Current | mA | Max. 80 | Applying rated voltage, 2730Hz square wave, 1/2duty |
| 4 | Coil Resistance | Ω | 6.0 \pm 1.0 | |
| 5 | Sound Output | dBa | Min. 85 (Typical 92) | Distance at 10cm(A-weight free air). Applying rated voltage 2730Hz, square wave, 1/2duty |
| 6 | Rated Frequency | Hz | 2730 | |
| 7 | Operating Temp. | $^{\circ}$ C | -20 ~ -60 | |
| 8 | Storage Temp. | $^{\circ}$ C | -30 ~ +70 | |
| 9 | Dimension | mm | ϕ 9.0 \times H4.5 | See attached drawing. |
| 10 | Weight | gram | 1.0 | |
| 11 | Material | | PPO(Black) | |
| 12 | Terminal | | Pin type (Plating Au) | See attached drawing. |
| 13 | Environmental Protection Regulation | | RoHS | |

TYPICAL FREQUENCY RESPONSE CURVE

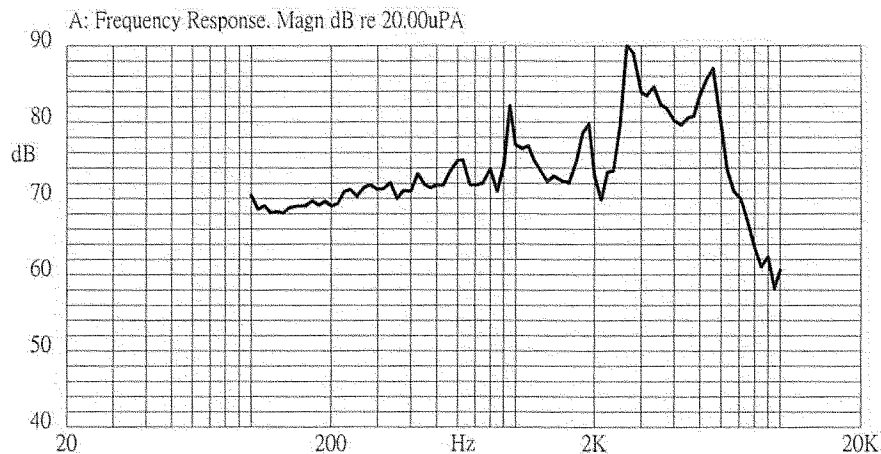



Part No: CST-911AP


Description: magnetic buzzer

Date: 1/30/2006

Unit: mm

Page No: 2 of 4


APPEARANCE DRAWING

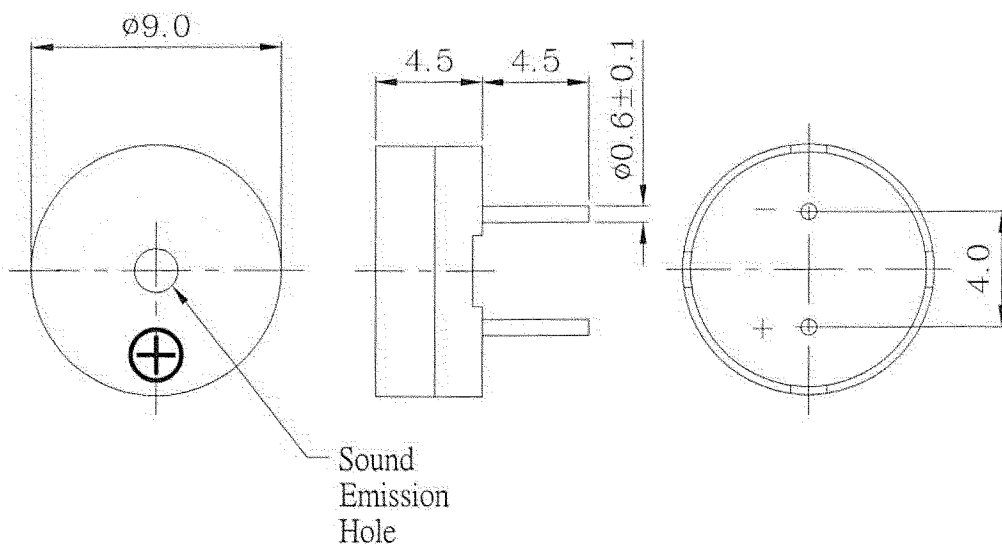

Tol: ± 0.5

Unit: mm

MEASUREMENT METHOD

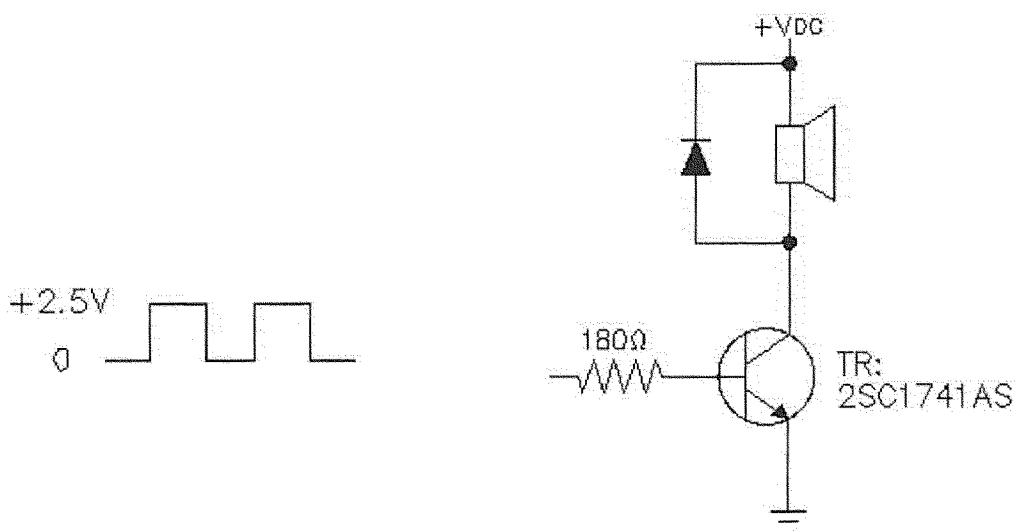



Part No: CST-911AP

Description: magnetic buzzer

Date: 1/30/2006

Unit: mm



Page No: 3 of 4

MECHANICAL CHARACTERISTICS

| No. | Item | Test condition | Evaluation standard |
|-----|------------------------------|--|--|
| 1 | Solderability ¹ | Lead terminals are immersed in rosin for 5 seconds and then immersed in solder bath of +270±5°C for 3±1 seconds. | 90% min. lead terminals shall be wet with solder. (Except the edge of terminal) |
| 2 | Soldering Heat Resistance | Lead terminal are immersed up to 1.5mm from sounder's body in solder bath of +260±5°C for 3±1 seconds. | No interference in operation |
| 3 | Terminal Mechanical Strength | The force 10 seconds of 9.8N (1.0kg) is applied to each terminal in axial direction. | No damage and cutting off |
| 4 | Vibration | Buzzer shall be measured after being applied vibration of amplitude of 1.5mm with 10 to 55hz band of vibration frequency to each of 3 per-pendicular directions for 2 hours. | After the test the part shall meet specifications with-out any damage in appearance and the SPL should be in ±10dBA compared with initial one. |
| 5 | Drop test | The part only shall be dropped from a height of 75cm onto a 40mm thick wooden board 3 times in 3 axes (X.Y.Z). (a total of 9 times). | |

Notes: 1. Not recommended for wave soldering

ENVIRONMENT TEST
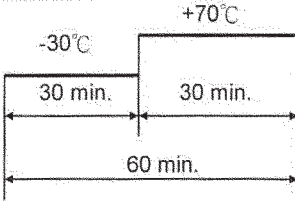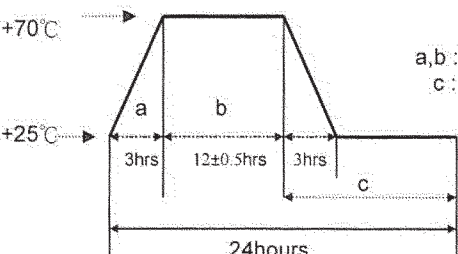
| No. | Item | Test condition | Evaluation standard |
|-----|-----------------------|--|---|
| 1 | High temp. test | After being placed in a chamber at +70°C for 96 hours. | After the test the part shall meet specifications with-out any degradation in appearance and performance except SPL. after 4 hours at +25°C. the SPL should be in ±10dBA compared with initial one. |
| 2 | Low temp. test | After being placed in a chamber at -30°C for 96 hours. | |
| 3 | Thermal Shock | The part shall be subjected to 10 cycles. One cycle shall consist of;  | |
| 4 | Temp./ Humidity Cycle | The part shall be subjected to 10 cycles. One cycle shall be 24 hours and consist of;  | |

RELIABILITY TEST

| No. | Item | Test condition | Evaluation standard |
|-----|---------------------|---|--|
| 1 | Operating life test | 1. Continuous life test The part shall be subjected to 72 hours at +45°C with 1.5V ,2730Hz applied. 2. Intermittent life test A duty cycle of 1 minute on, 1 minutes off, a minimum of 10000 times at room temp.(+25±10°C) with 1.5V ,2730Hz applied. | After the test the part shall meet specifications with-out any degradation in appearance and performance except SPL after 4 hours at +25°C. the SPL should be in ±10dBA compared with initial one. |

TEST CONDITION.

Standard Test Condition : a) Temperature : +5 ~ +35°C b) Humidity : 45-85% c) Pressure : 860-1060mbar

Judgement Test Condition : a) Temperature : +25 ± 2°C b) Humidity : 60-30% c) Pressure : 860-1060mbar

PACKING STANDARD

