



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



### CST25-1000

**Description:**

Triad's CST25 series of current sense transformers are ideal for monitoring currents in high frequency applications such as switch-mode power supplies, LED lighting, etc. The CST25 series is offered with a built-in sense winding allowing for ease of use. These current sense transformers are fully encapsulated allowing for a high isolation of 4000 VAC between primary and secondary windings. There are five different popular turn ratios available to choose from.

**Construction:**







Constructed with UL rated 130°C (Class B) materials.

**Electrical Specifications (@25°C) @ 10kHz, 0.01V**

Min. Sec. Inductance	Turns Ratio	Amps (RMS)	Max. DC (Ω) Resistance Sec.	Sec. Current Max (mA)	ET Max (Vusec)
1900mH	1:1000	25	50.0	25	3500

1. Frequency: 50kHz-500kHz
2. Operating Temperature: -40 – +100°C
3. Storage Temperature: -50°C – +110°C, ≤ 75% RH
4. ET = Volts-second product
5. Weight: 8g

**CST25-1000 Schematic**

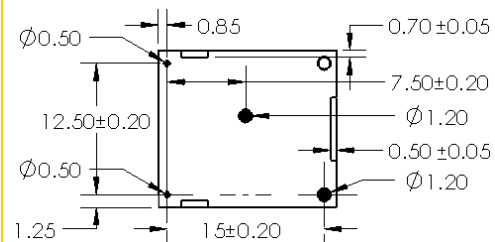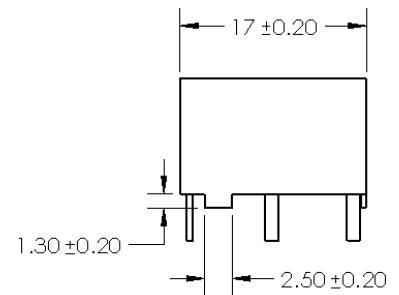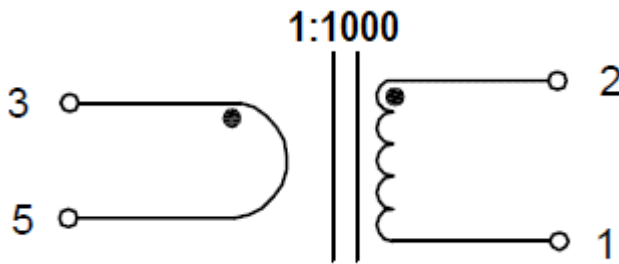

**Safety:** 4000VAC Dielectric Strength between windings.

**RoHS Compliance:** As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

Note: Order and shipping documentation may have a "- B" suffix; this indicates Bulk packaging but does not show on the actual part number marked on the transformer.

\*Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics website for the most current version. For soldering and washing information please see <http://www.triadmagnetics.com>