

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








## THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

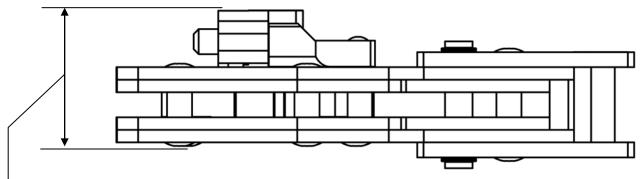

1.44" [37] CT-2525CH, CT-2550CH & CT-2500CH (WITH LOCATOR)

1.25" [32] CT-2570CH (WITHOUT LOCATOR)

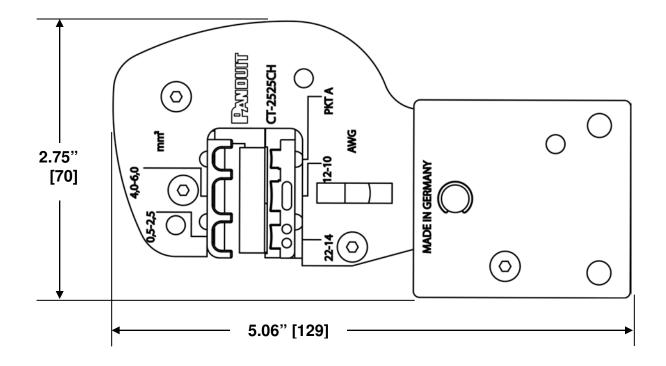

## **NOTES, UNLESS OTHERWISE SPECIFIED:**

These crimping heads are used with Panduit CT-2500 and CT-2500/E Battery Operated Crimping Tools.

Weight 1.74 lbs. (0,79 kg)

Dimensions: 5-1/16" L x 2-3/4" H x 1-7/16" W (with Locator)

[129 L x 70 H x 37 W] mm

CT-2525CH or Crimping head or die insert for installing the following Panduit products:

CD-525 #26 - #22 AWG  $(0.14 - 0.5 \text{ mm}^2)$  insulated terminals and splices,

#22 – #10 AWG (0,5 – 6,0mm<sup>2</sup>) fully insulated disconnects, insulated parallel

splices; and specific #22 – #14 AWG (0,5 – 2,5mm<sup>2</sup>) barrel insulated

disconnects.

CT-2550CH or Crimping head or die insert for installing the following Panduit products:

CD-550 #22 - #10 AWG  $(0.5 - 6.0 \text{mm}^2)$  insulated terminals and splices;

and specific insulated disconnects.

Reduced crimp effort advantage for #12 – #10 AWG (4,0 – 6,0mm<sup>2</sup>)

terminations.

CT-2570CH or Crimping head or die insert for installing most of the following Panduit

CD-570 products:

#22 – #10 AWG (0,5 – 6,0mm<sup>2</sup>) non-insulated terminals, disconnects; and

F:\wrkgrp\rvusers\ENGR DOCS\CUSTOMER DRAWINGS\TP25387B01 03 CT-25XXCH CD.doc

specific non-insulated splices.

CT-2500CH Crimping head (frame only); to be used with crimping die inserts CD-525,

CD-550 or CD-570 (sold separately).

The Crimping Head and/or Die Insert Installation Instructions can be found at www.panduit.com, search for CT-2525CH, CT-2550CH, CT-2570CH, CT-2500CH, CD-525, CD-550 or CD-570.

Dimensions in [brackets] are in millimeters.

All dimensions are for reference only.

CT-2525CH SHOWN ABOVE

									Par	IDUIT a	ORP. TINLEY PARK, IL	LINOIS
									CD*CT-2525CH, CT-2550CH, CT-2570CH, CT-2500CH			
03	5-27-14	BLR	BJPU	ADD MM <sup>2</sup> DIMS TO CT-2525CH / CT-2550CH	4752		$\mathcal{A}\mathcal{B}\mathcal{J}$			RWISE SPECIFIED, TOLERANCES ARE:	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
02	1-28-14	BLR	BJPU	UPD BRANDING	4704		ABJ		(.x) ± (.xx) ±	(.xxx) ± ANGLES ±		
01	4-04-08	BLR	BJPU	ADD CT-2500CH & DIE INSERTS	4290		JRWA		DRAWN BY: BLR	MATL:	SCALE NONE	
00	3-02-07	BLR	SRRE	RELEASED	4241		SZ		3-02-07		DRAWING NO.	DWG
REV	DATE	ву	CHK'D	DESCRIPTION	ECN	- R	CUST	SUP	CHK'D: SRRE		TP25387B01	B