



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# CT4066

## 25 MHz Differential Probe

# Datasheet

### Overview:

The CT4066 is an active differential probe with a high input impedance and low input capacitance. With a 25 MHz bandwidth, this probe is great for working on a wide variety of measurements ranging up to  $\pm 700$  V. The CT4066 is compatible with oscilloscopes from all major manufacturers.

### Features:

- 25 MHz bandwidth (-3 dB)
- Up to  $\pm 700$  V (DC + AC peak)
- Attenuation 20x/50x/200x
- High accuracy ( $\pm 2\%$ )
- Power indicator LED
- Meets IEC 61010-1:2010 CAT II safety standard



### Kit Contents:

- Differential Probe
- (2) Pincer clips
- (2) Alligator clips
- (2) Sheathed 4 mm banana plug test leads, silicone jacketed
- (1) Insulated BNC cable
- (1) 9 V power adapter

Technical data subject to change.  
© Cal Test Electronics 2018.

[caltestelectronics.com](http://caltestelectronics.com)

**Cal Test**  
ELECTRONICS

All specifications apply to the unit after a temperature stabilization time of 20 minutes over an ambient temperature range of 25 °C ± 5 °C.

Electrical Characteristics	
Bandwidth	25 MHz (50x and 200x attenuation) 15 MHz (20x attenuation)
Rise Time	14 ns for 50x and 200x 23.4 ns for 20x
Attenuation	20x, 50x, 200x
Accuracy	±2% *
AC CMRR	80 dB @ 60 Hz 60 dB @ 100 Hz 50 dB @ 1 MHz
Maximum Input Voltage (20x) (DC + AC peak)	±70 V
Maximum Input Voltage (50x) (DC + AC peak)	±175 V
Maximum Input Voltage (200x) (DC + AC peak)	±700 V
Absolute Maximum Rated Input Voltage (each side to ground)	600 Vrms
Input Impedance (Differential)	4 MΩ // 1.2 pF
Input Impedance (each side to ground)	2 MΩ // 2.3 pF
Output Voltage Swing	±8 V (driving 1 MΩ oscilloscope input)
Offset (typical)	±5 mV
Noise (typical)	2 mVrms
Source Impedance	50 Ω
Power Supply	9 V power adapter (included)

Mechanical Characteristics	
Weight	250 g
Dimensions	195 x 55 x 30 mm
BNC Cable Length	100 cm
Input Leads Length	55 cm each

Environmental Characteristics	
Operating Temp/Humidity	0°C to 50°C / 10% to 85% RH
Storage Temp/Humidity	-30°C to 70°C / 10% to 90% RH
Pollution Degree	Pollution Degree 2

Safety Specifications	
IEC 61010-1 CAT II	

\* Accuracy based on DMM with 10 MΩ input impedance.

Specifications are subject to change without notice. To ensure the most current version of this manual, please download the current version from our website: [caltestelectronics.com](http://caltestelectronics.com)

## Performance Data Plots

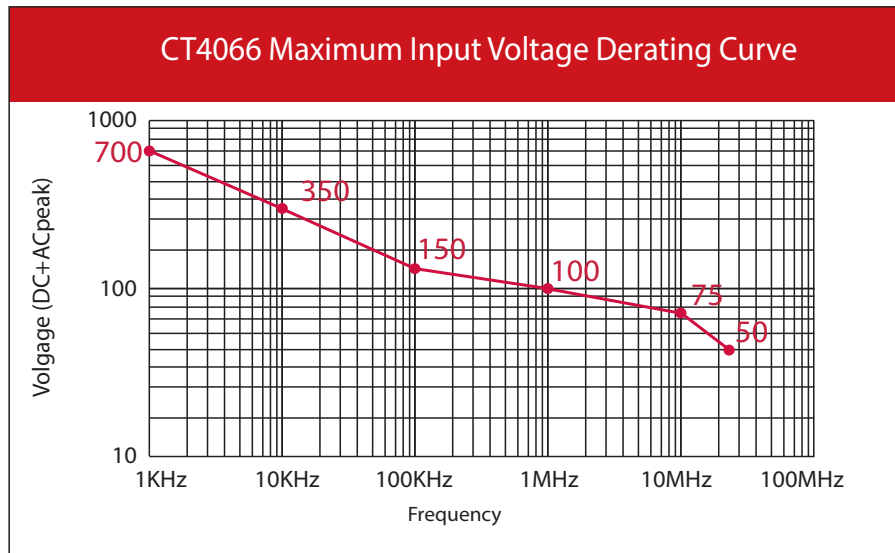


Figure 1 Derating Curve

