



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Digi Connect[®] Tank

Fully integrated, Cellular Enabled Tank Level Sensor

Monitor tank level and location remotely using cellular technologies to optimize operations.



Overview

Digi Connect Tank is a fully integrated cellular-enabled tank level sensor providing remote access to deployed tanks, totes and containers. Part of the Digi Tank solutions offer, it leverages Digi Device Cloud and integration services, enabling customers who own or manage large numbers of tanks to easily integrate into existing applications or work with 3rd party applications.

Digi Connect Tank provides logistical and operational optimization via tank level and location data. Customers can route feet and personnel efficiently, reduce transportation and fuel costs, and increase supply chain predictability.

Using 3G/2G cellular technologies, Digi Connect Tank can be installed in locations where network infrastructure may not be available. Its small form factor, durable NEMA 4X enclosure, industry safety ratings and long-life battery make this product ideal for use in a broad range of tank applications.

Target Applications



Cooking Oil Recycling



Chemicals



Water/Waste Water



Waste Oil




Agriculture



Diesel Exhaust Fluid

Application Highlight

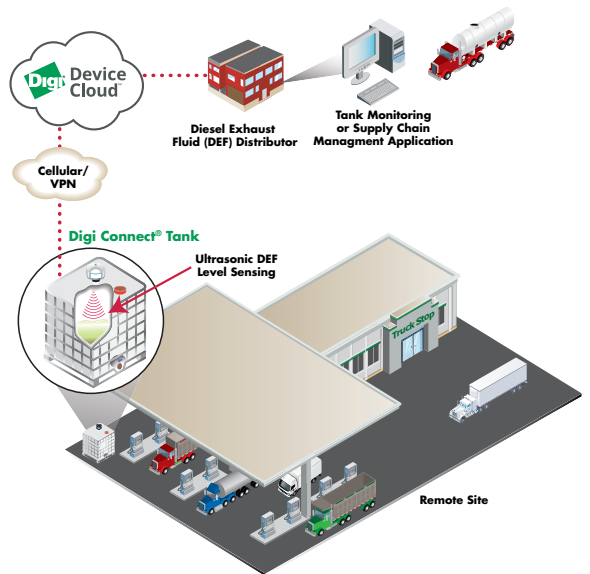

Features/Benefits

- Remote access to tanks located virtually anywhere
- Fully integrated sensor/long life-battery/global cellular in NEMA 4X enclosure for broad tank application support
- Tank location and level provides logistical and operational optimization
 - Reduced transportation/fuel costs via efficient routing of fleet and personnel
 - Predictable and efficient supply chain management
- Integrated ultrasonic sensor for non-contact liquid level measurements
 - Includes temp/sound speed compensation



Specifications

Digi Connect® Tank


WWAN		
Carriers	AT&T, International GSM Carriers*	
Frequency Band	North American Version: Dual Band UMTS/HSPA+ (850,1900 MHZ) International Version: Dual Band UMTS/HSPA+ (900/2100 MHZ) Dual-Band GSM (900/1800 MHZ)	
Data Rate	HSDPA Cat. 10 / HSUPA Cat.6 data rates DL: max. 14.4 Mbps, UL: max. 5.76 Mbps >> EDGE class 12 data rates: DL: max. 237 kbps, UL: max. 237 kbps >> GPRS class 12 data rates DL: max. 85.6 kbps, UL: max. 85.6 kbps	
Antenna	Built-in	
SIM Slots	1	
Sensor	Short Range	Mid Range
Model	Massa M-300/150	Massa M-300/95
Type	Ultrasonic, Built-in temperature/sound speed compensation	
Range	Range at -20° C to +65° C: 4 inches (100 mm) to 7 feet (2.1 meters) Range at -30° C to -20° C: 4 inches (100 mm) to 5 feet (1.5 meters)	Range at -20° C to +65° C: 1 foot (0.3meters) to 13 feet (4 meters) Range at -30° C to -20° C: 1 foot (0.3meters) to 12 feet (3.7 meters)
GPS/Glonass		
Channels	56	
Tracking Sensitivity	GPS: -161 dBm; Glonass: -158 dBm	
TTF (Typical)	Cold Start: 30 seconds, Warm Start: 28 seconds; Glonass: Cold Start: 32s, Warm Start 25s	
Horizontal Accuracy	GPS: 2.5m; Glonass: 4m	
Antenna	Built-in	
Management		
Configuration & Management	Device Cloud/Local USB to Serial CLI	
Protocol	TCP	
Power		
Battery	7.2V, 14.5 Ah, Lithium Thionyl Chloride, non-rechargeable, replaceable	
Battery Life	Approximately 2 years (@ 2 reads/transmits per day)	
Environmental		
Operating Temperature	-30° C to +65° C (See range limitations in Sensor section above) -30° C to +50° C (for ATEX rated applications)	
Storage Temperature	-40° C to +85° C	
Relative Humidity	90% (Non-condensing after 90%)	
Battery Discharge	<1%/year if stored at +30° C	
Physical		
Dimensions (L x W x H)	7.0 in x 5.15 in x 6.0 in (17.8 cm x 12.9 cm x 15 cm)	
Weight	1.25 lbs	
LEDs	Battery, Network	
Enclosure Material	Valox (Note: Massa sensor is PVC/PPA)	
Enclosure Rating	NEMA 4X	
Mounting	1" NPT	

* For Verizon and Sprint availability please contact Digi

Specifications

Digi Connect® Tank

Regulatory Approvals	
Emissions	FCC part 15 Subpart B class B, EN55022: 2010/AC: 2011 class B, IECS-003 Issue 5: 2012 class B
Immunity	EN55024: 2010
Safety	UL60950-1, CAN/CSA C22.2 No. 60950-1-01, IEC 60950-1:2005 (Second Edition); Am1:2009 + Am2:2013, EN 60950-1:2006 / A11:2009 / A1:2010 / A12:2011 / A2:2013 and EN 60950-22:2006; C1D2, ANSI/ISA 12.12.01-2013, CSA C22.2 No. 213-M1987 ATEX EN 60079-0:2012+A11:2013, EN 60079-15:2010, eII 3 G Ex nA nC IIC T6 Gc
Warranty	
Product Warranty	3 years, excluding battery

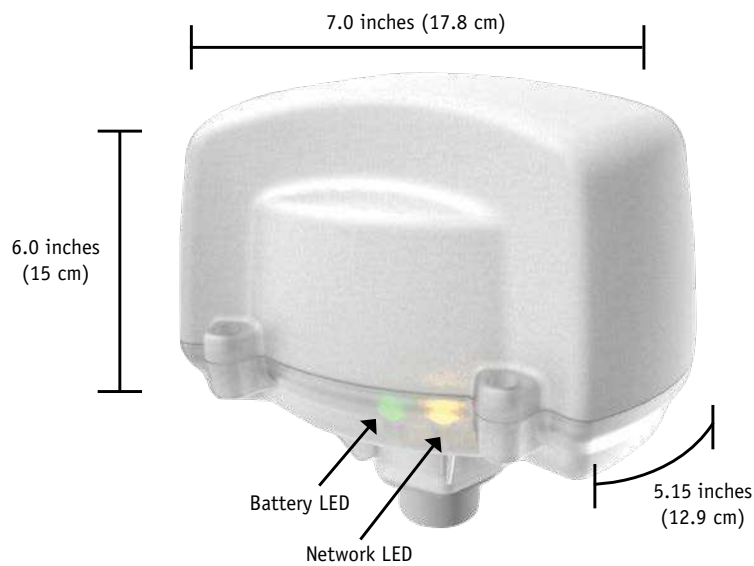

You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

91001796
B1/915

**Digi International
Worldwide HQ**
877-912-3444
952-912-3444
www.digi.com

**Digi International
France**
+33-1-55-61-98-98
www.digi.fr

**Digi International
Japan**
+81-3-5428-0261
www.digi-intl.co.jp

**Digi International
Singapore**
+65-6213-5380

**Digi International
China**
+86-21-50492199
www.digi.com.cn



www.digi.com