



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




TOP VIEW

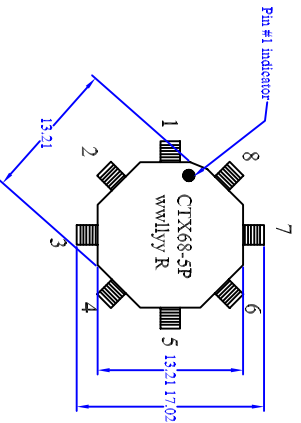

FRONT VIEW




RECOMMENDED PCB LAYOUT

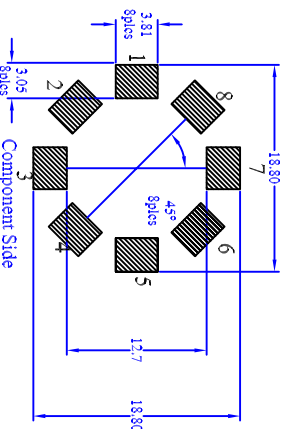

ELECTRICAL CHARACTERISTICS

OCL @100kHz, 0.010Vrms, 0.0Ade pins (1,2,3,4) - (8,7,6,5): 53.66 - 80.49 uH
 OCL @10kHz, 0.250Vrms, 1.72Ade pins (1,2,3,4) - (8,7,6,5): 43.32 uH min
 DCR @20°C pins (1-8): 0.450 ohms max
 DCR @20°C pins (2-7): 0.450 ohms max
 DCR @20°C pins (3-6): 0.450 ohms max
 DCR @20°C pins (4-5): 0.450 ohms max
 Hipot@300Vdc winding to winding for 1 second

SCHEMATIC



Notes:

- 1) All Dimensions are in millimeters unless otherwise specified.
- 2) Tolerances are +/- 0.25 unless stated otherwise.
- 3) All soldering surfaces to be coplanar within 0.15 millimeters.
- 4) Wwilly = (Date Code) R- (Revision Level)
- 5) PCB tolerances are +/- 0.1 unless stated otherwise.
- 6) Tie pins (1,2,3&4) and pins (8,7,6&5) together for 68uH@1.06Ade.

Cooper Electronic Technologies

3601 Quantum Boulevard, Boynton Beach, FL 33426
 Inductor/Transformer

68/1088uH @ 1.72/0.43Ade	Drawing Number	CTX68-5P
SMT, Octape Size 5, 8 Pad, 8.26mm max ht	Size	
A	Revision Level	B