

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



### Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









# YSTEK Voltage Controlled Oscillator-VCO CVCO33CL-0415-0435


PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			415	MHz
Upper Frequency:	435			MHz
Tuning Voltage:	0.5		4.5	VDC
Supply Voltage:	4.75	5.0	5.25	VDC
Output Power:	0	+3.0	+6.0	dBm
Supply Current:		15		mA
Harmonic Suppression (2 <sup>nd</sup> Harmonic):		-15		dBc
Pushing:		1.0		MHz/V
Pulling, all Phases:		3.0		MHz pk-pk
Tuning Sensitivity:		12		MHz/V
Phase Noise @ 10kHz offset:		-103		dBc/Hz
Phase Noise @ 100kHz offset:		-123		dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			100	pF
Operating Temperature Range:	-40		+85	°C
Storage Temperature Range:	-45		+90	°C



### Phase Noise (1 Hz BW, Typical)


#### Agilent E5052A Signal Source Analyzer CVCO33CL-0415-0435 Phase Noise 10.00dB/Ref -20.00dBc/Hz -20.00 1 kHz 10 kHz 100 kHz 1 MHz 10 MHz -30.00 -50.00 -70.00 -90,00 -100.0 -110.0 -120.0 -130.0 -140.0 -160.0 -170.0 -180.0 LO Opt [<150kHz] IF Gain 20dB Freq Band [300M-7GHz]

### Tuning Curve (Typical)

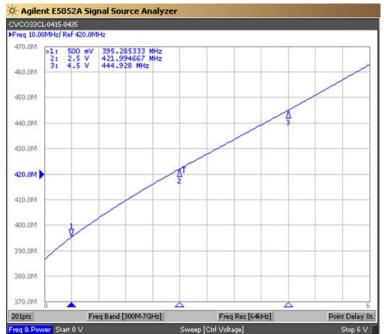



## STEK Voltage Controlled Oscillator-VCO CVCO33CL-0415-0435

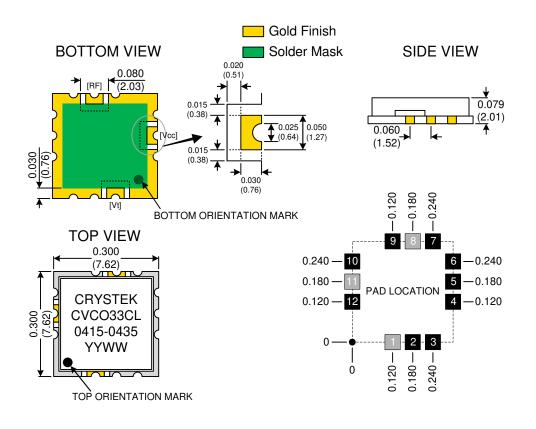




Pad	Connection
1 8 11 Others	Vt RF-OUTPUT Vcc GROUND

- Unless otherwise specified,
  Dimensions are in: IN
  (mm)
- Pad LocationDimensions are in: Inches

#### TAPE AND REEL

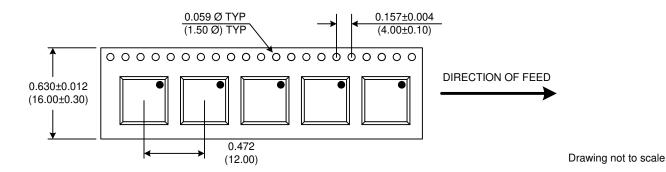

Ю	 luct	Can	+	м
_	 1110			-

Crystek Part Number:	CVCO33CL-0415-0435	Release Date:	05-Apr-12
Revision Level:	D	Responsible:	C. Vales

Specification is subject to change without notice Page 2 of 2

