

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









Coaxial Resonator Oscillator-CRO CVCO55CC-1700-1700


PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			1700	MHz
Upper Frequency:	1700			MHz
Tuning Voltage:	0.3		4.7	VDC
Supply Voltage:	4.75	5.0	5.25	VDC
Output Power:	0	+2.5	+5.0	dBm
Supply Current:		15	25	mA
Harmonic Suppression (2 nd Harmonic):		-15	-10	dBc
Pushing:		0.5	1.0	MHz/V
Pulling, all Phases:		1.0	2.0	MHz pk-pk
Tuning Sensitivity:		10		MHz/V
Phase Noise @ 10kHz offset:		-120	-118	dBc/Hz
Phase Noise @ 100kHz offset:		-138	-136	dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			22	pF
Operating Temperature Range:	-40		+85	°C
Storage Temperature Range:	-45		+90	°C



Phase Noise (1 Hz BW, Typical)


Agilent E5052A Signal Source Analyzer CVC055CC-1700-1700 Phase Noise 10.00dB/ Ref -20.00dBc/Hz -20.00 +93.3565 dBc/Hz -121.6804 dBc/Hz -138.5738 dBc/Hz -153.9802 dBc/Hz -161.7268 dBc/Hz 1 kHz 10 kHz 100 kHz 1 MHz 10 MHz -30.00 40.00 -50.00 -60.00 -70.00 -90.00 -100.0 -110.0 -120.0 -130.0 -140.0 -150.0 -160.0 -170.0 -180.0 LO Opt [<150kHz] IF Gain 20dB Freq Band [300M-7GHz]

Tuning Curve (Typical)

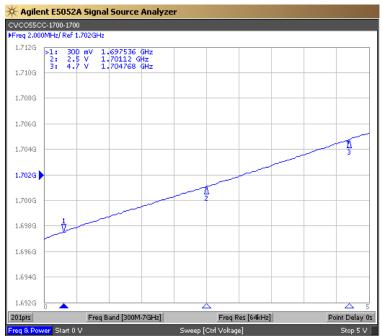




Coaxial Resonator Oscillator-CRO CVCO55CC-1700-1700

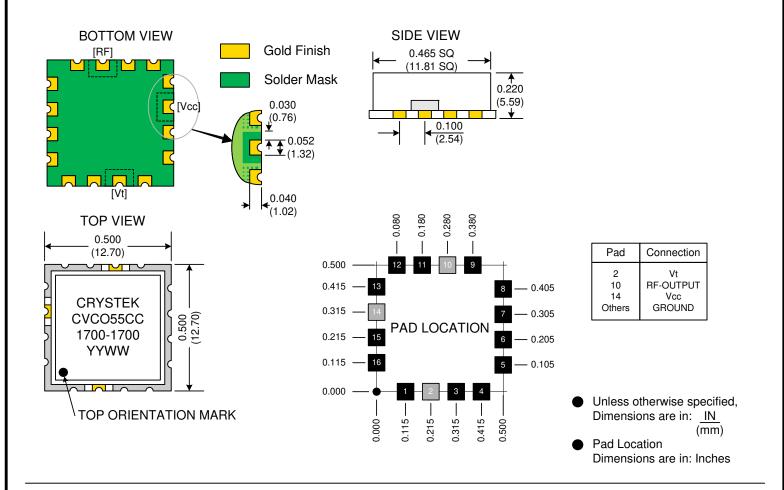

TAPE AND REEL

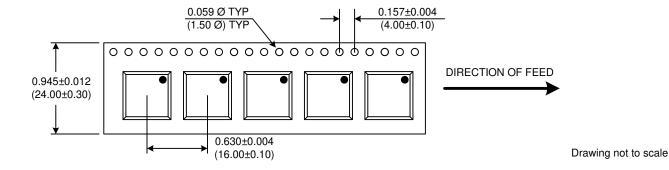

Dro	duct	Con'	trali
		COIL	пот.

			1
Crystek Part Number:	CVCO55CC-1700-1700	Release Date:	03-Aug-10
Revision Level:	В	Responsible:	C. Vales

Specification is subject to change without notice Page 2 of 2

