



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







CRYSTEK
CRYSTALS
A DIVISION OF CRYSTEK CORPORATION

CVS575

Voltage Controlled SAW Oscillator

3.3V LVPECL

5×7.5mm SMD

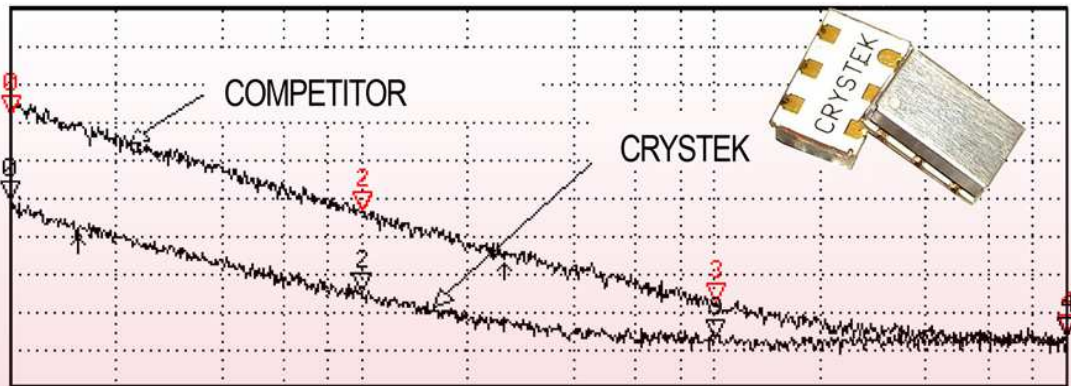

COMPETITOR				CRYSTEK			
N	SWP	PARAM	VAL	N	SWP	PARAM	VAL
0		1 kHz	-78.272 dBc	0		1 kHz	-101.77 dBc
2		10 kHz	-103.95 dBc	2		10 kHz	-125.84 dBc
3		100 kHz	-128 dBc	3		100 kHz	-138.11 dBc
4		1 MHz	-136.61 dBc	4		1 MHz	-137.72 dBc

Model CVS575 is a SAW(surface acoustic wave) based Voltage Controlled Oscillator (VCISO) designed for High Performance PLLs. It is an ideal choice for Telecommunication applications needing to meet Low Jitter generation requirements.

It is housed in the industry standard 5×7.5×2.5mm SMD package. The Enable/Disable function was designed to be used with CMOS logic levels for ease of interfacing. It is not necessary to convert to LVPECL logic to turn the Output ON and OFF.

Rev: J
Date: 08-May-12
Page 1 of 2

CVS575



Voltage Controlled SAW Oscillator

3.3V LVPECL


5x7.5mm SMD




Performance Specification	MIN	TYP	MAX	UNITS
Nominal Frequency: <i>Customer Specified</i>	315		1000	MHz
Absolute Pulling Range:	± 50			ppm
Frequency Stability:		± 150		ppm
Linearity:		± 15		%
Tuning Sensitivity, Kv:		+ 275		ppm/V
Output Phase Noise:				
@1kHz Offset		-100		dBc/Hz
@10kHz Offset		-125		dBc/Hz
@100kHz Offset		-138		dBc/Hz
@1MHz Offset		-140		dBc/Hz
@10MHz Offset		-142		dBc/Hz
Jitter: 12kHz-20MHz SONET OC-48 (12kHz~20MHz) SONET OC-192 (50kHz~80MHz)		0.18 0.12		pS, RMS pS, RMS
Rise/Fall Times, tr/tf 20-80%	100		240	pS
Output High Voltage, V _{OH}	2.215		2.420	V
Output Low Voltage, V _{OL}	1.470		1.745	V
Enable High Voltage, V _{IH}	2.0		V _{CC}	V
Disable Low Voltage, V _{IL}	GND		0.8	V
Enable High Current, I _{IH}			+ 150	uA
Disable Low Current, I _{IL}			-150	uA
Duty Cycle:	45	50	55	%
Supply Voltage:	3.0	3.3	3.6	V
Supply Current, I _{CC} :		82		mA
Control Voltage:	0		3.3	V
Input Impedance:		100		kΩ
Input Modulation:		500		kHz
Operating Temperature:	-20		+ 70	°C
Storage Temperature:	-45		+ 90	°C

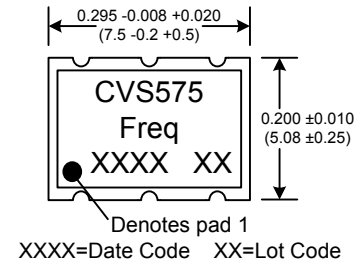

Pad	Connection
1	Volt Cntrl
2	E/D
3	GND
4	OUT
5	COUT
6	Vdd

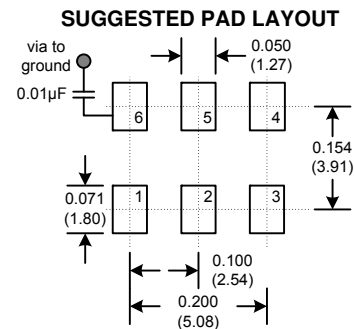

RECOMMENDED REFLOW SOLDERING PROFILE

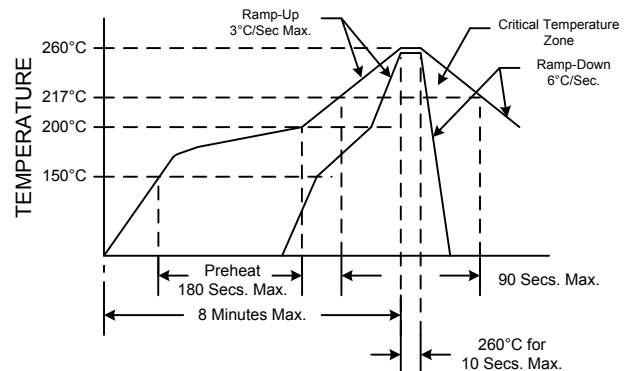

NOTE: Reflow Profile with 240°C peak also acceptable.

Parameter	Conditions
Mechanical Shock	MIL-STD-883, Method 2002
Mechanical Vibration	MIL-STD-883, Method 2007
Solderability	MIL-STD-883, Method 2003
Resistance to Solvents	MIL-STD-883, Method 2015

Rev: J
Date: 08-May-12
Page 2 of 2