



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CX4024NL

- RF SPLITTER, 2-WAY
- 5–1000MHz
- IMPEDANCE = 75 OHMS
- SURFACE MOUNT

NOTES: UNLESS OTHERWISE SPECIFIED

1. OPERATING TEMPERATURE: –40°C TO +85°C
2. STORAGE TEMPERATURE: –50°C TO +125°C
3. COMPLIANCE TO J–STD:
 - J–STD–002: SOLDERABILITY AT REFLOW PEAK TEMPERATURE OF 245°C
 - J–STD–020: MSL 1, NO MOISTURE SENSITIVE
 - J–STD–075: R6, 250°C MAXIMUM THROUGH REFLOW SOLDER
4. DIMENSIONS ARE IN INCHES.
 - TOLERANCE:
 - .XX ±.01
 - .XXX ±.005
5. OPTIONAL TAPE & REEL PACKAGING CAN BE ORDERED BY ADDING A "T" SUFFIX TO THE PART NUMBER. ie: CX4024NLT

ELECTRICAL SPECIFICATIONS: @ 25°C

INSERTION:

FREQUENCY	
5–500 MHz	–20 dB MIN
501–870 MHz	–18 dB MIN
871–1000 MHz	–15 dB MIN

RETURN LOSS:


FREQUENCY	
5–500 MHz	–25 dB MIN
501–870 MHz	–20 dB MIN
871–1000 MHz	–15 dB MIN

INSERTION LOSS:

FREQUENCY	
5–500 MHz	–3.8 dB MAX
501–870 MHz	–4.0 dB MAX
871–1000 MHz	–4.3 dB MAX

AMPLITUDE UNBALANCE:

FREQUENCY	
5–500 MHz	–0.1 dB MAX
501–870 MHz	–0.2 dB MAX
871–1000 MHz	–0.3 dB MAX

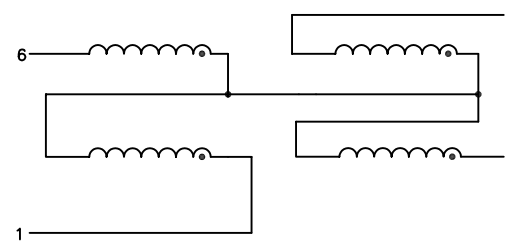

SCHEMATIC

© Copyright, 2014. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (04/14/2014)

PRODUCT DESCRIPTION:

SPLTR, RF, 2-WAY, 0-DEG; 5-1000MHZ

SHEET:

1 OF 2


PART NO.

CX4024NL

DATASHEET REV.

M16

MECHANICAL SPECIFICATIONS:

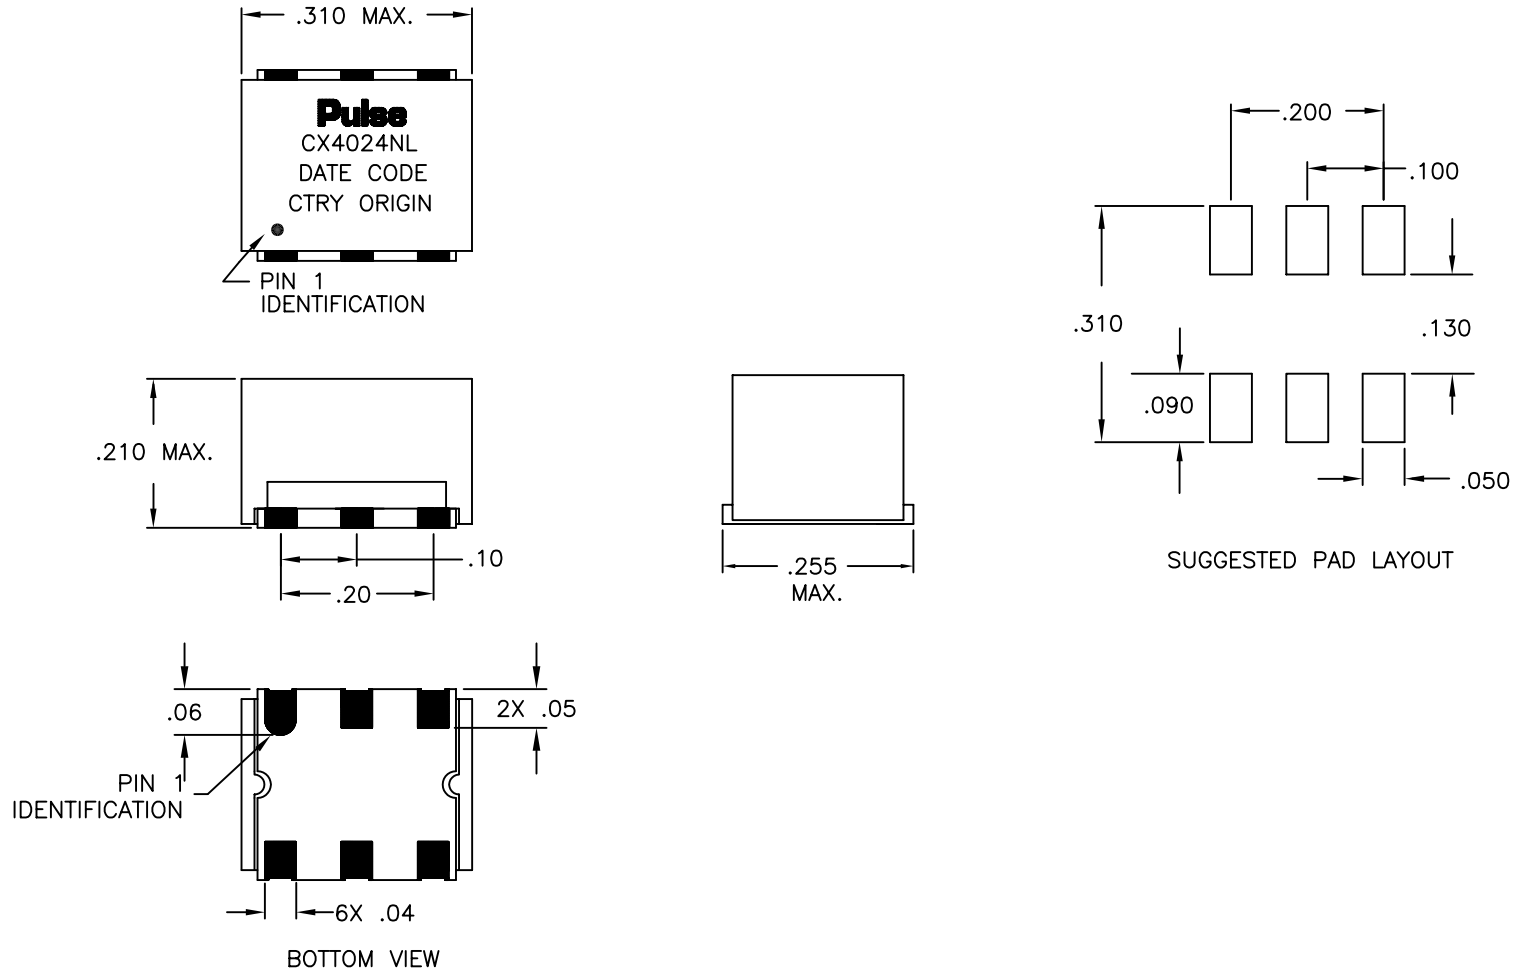

© Copyright, 2014. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (04/14/2014)

PRODUCT DESCRIPTION:

SPLTR, RF, 2-WAY, 0-DEG; 5-1000MHz

SHEET:

2 OF 2

PART NO.

CX4024NL

DATASHEET REV.

M16