



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



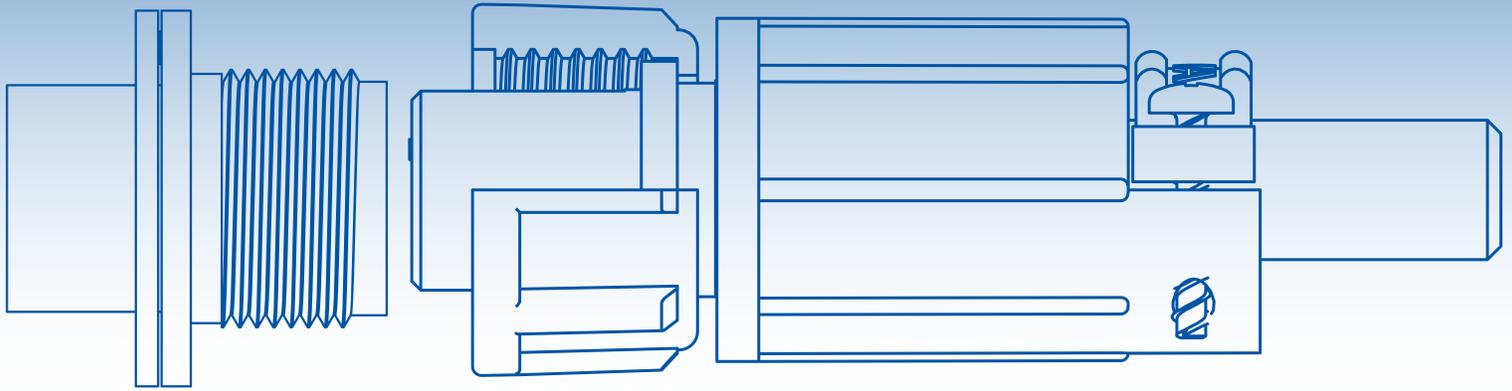

## MIL-E-QUAL® FIRST MATE LAST BREAK CONTACT

NEW PRODUCT BULLETIN C707

### FEATURES & BENEFITS

- First mate last break contact protects the electrical components around the connection
- Two contact sizes available:  
#12 size and #16 size standard
- Sturdy construction is IP-67 rated when overmolded
- Black thermoplastic with UV inhibitor for rugged outdoor applications

### APPLICATIONS

- Lighting fixtures
- Power transmission for alternative energy



# CONXALL®


A SWITCHCRAFT COMPANY



CONXALL • 601 E Wildwood • Villa Park, IL 60181 • 630-834-7504  
Please visit [conxall.com](http://conxall.com) for the most up-to-date product specifications. Made in USA.

# MIL-E-QUAL® FIRST MATE LAST BREAK CONTACT

## NEW PRODUCT BULLETIN C707

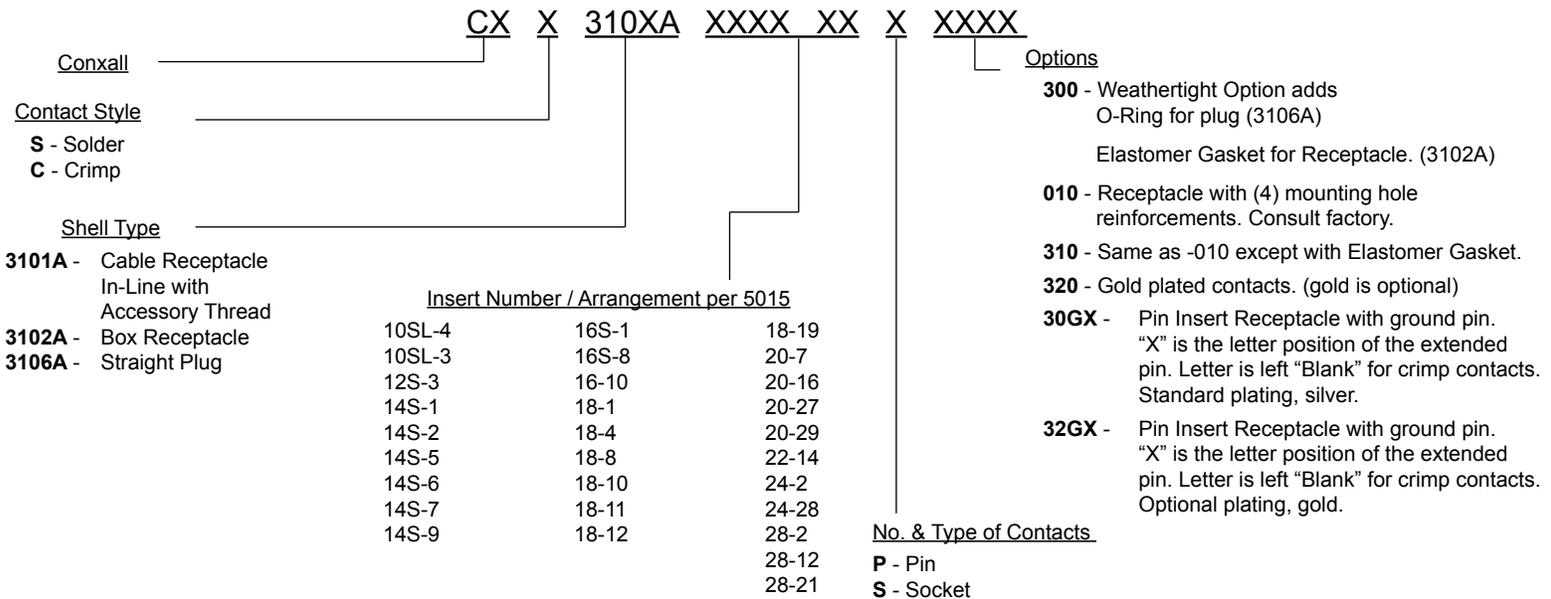

## SPECIFICATIONS

### PRODUCT SPECIFICATIONS

Manufacturers ID	MIL-E-QUAL®
Description:	Field Installable Connector & Custom Cable Assemblies
Rating:	3.4 thru 23.0A, 600V DC
Contact Sizes:	#12 and #16 AWG
Conductor Sizes:	#12AWG, #14AWG, #16AWG #18AWG or #20AWG
Configuration:	Contacts per Mil-C-5015
Certification:	UL File E150822

### ELECTRICAL SPECIFICATIONS

600V-AC for Shell Types 3101A and 3102A  
 500V-AC for Shell Type 3106A up to 28 positions  
 277V-AC for Shell Type 3106A from 29 or greater positions

### ENVIRONMENTAL SPECIFICATIONS

Operating Temperature:	-40 °C to +75 °C (-40°F to +167°F)
Corrosion:	48hr salt spray contacts (mated)
Durability:	300 mate/unmate cycles minimum
Weathertight:	Consult factory with specific application

### FACTORY MOLDED CABLE ASSEMBLIES

Watertight: NEMA 6P, 13: IEC IP67

### NOTE

Gasket, O-Ring & Grommet materials are suitable for -40 °C to +75 °C (-40°F to +167°F).

Consult factory for higher temperature requirements.

### MATERIAL SPECIFICATIONS

#### Cable Pin/Socket:

Mechanical Backshell:	Thermoplastic, UL Recognized, Black with UV Inhibitor (Threaded)
Strap:	Thermoplastic, UL Recognized, Black with UV Inhibitor
Screws:	Stainless Steel
Grommet:	Elastomer, Black
Coupling Ring:	Thermoplastic, UL Recognized, Black with UV Inhibitor
Contacts:	Copper Alloy, Standard Silver Plated, Gold Plated Optional
Connector Body:	Thermoplastic, UL Recognized, Black with UV Inhibitor
O-Ring:	Elastomer

#### Optional

Connector Cap:	Thermoplastic, UL Recognized, Black with UV Inhibitor
Gold Contacts:	Copper Alloy, Gold over Nickel

Alternate Key  
 Positions Available

#### Box Receptacle

Contacts:	Copper Alloy, Standard Silver Plated, Gold Plated Optional
Receptacle Body:	Thermoplastic, UL Recognized, Black with UV Inhibitor
Optional	
Receptacle Cap:	Thermoplastic, UL Recognized, Black with UV Inhibitor
Gasket:	Elastomer, Black
Gold Contacts:	Copper Alloy, Gold over Nickel

Extended Bosses  
 Alternate Key  
 Positions Available



CONXALL • 601 E Wildwood • Villa Park, IL 60181 • 630-834-7504

Please visit [conxall.com](http://conxall.com) for the most up-to-date product specifications. Made in USA.