



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Programmable High Frequency Crystal Oscillator with Spread Spectrum (SSXO) and No Spread Spectrum (XO) Option

Features


- Crystal Oscillator with Spread Spectrum Clock (SSXO)
- No Spread Spectrum (XO) Option
- Wide operating output clock frequency range of 10 to 166 MHz
- Programmable spread spectrum with nominal 31.5 kHz modulation frequency
- Center spread: $\pm 0.25\%$ to $\pm 2.0\%$
- Down spread: -0.5% to -4.0%
- No spread: $\pm 0.0\%$
- Integrated phase-locked loop (PLL)
- 85 ps typical cycle-to-cycle jitter with SSCLK = 133 MHz
- 3.3 V operation
- Output enable function
- Package available in 4-pin ceramic LCC SMD
- Pb-free package
- Industrial temperature from $-40\text{ }^{\circ}\text{C}$ to $85\text{ }^{\circ}\text{C}$

Benefits

- Provides a wide range of spread percentages for maximum electromagnetic interference (EMI) reduction to meet regulatory agency electromagnetic compliance (EMC) requirements. Reduces development and manufacturing costs and time-to-market.
- This versatile programming feature enables the user to switch between SSXO (with Spread) and XO (without Spread) functions with ease.
- Internal PLL to generate up to 166 MHz output.
- Suitable for most PC, consumer, and networking applications
- Application compatibility in standard and low power systems
- In house programming of samples and prototype quantities is available using [CY3672-USB programming kit](#) and [CY3724 socket adapters](#). Production quantities are available through Cypress's value added distribution partners or by using third party programmers from BP Microsystems, and HiLo Systems, and others.

For a complete list of related resources, [click here](#).

Logic Block Diagram

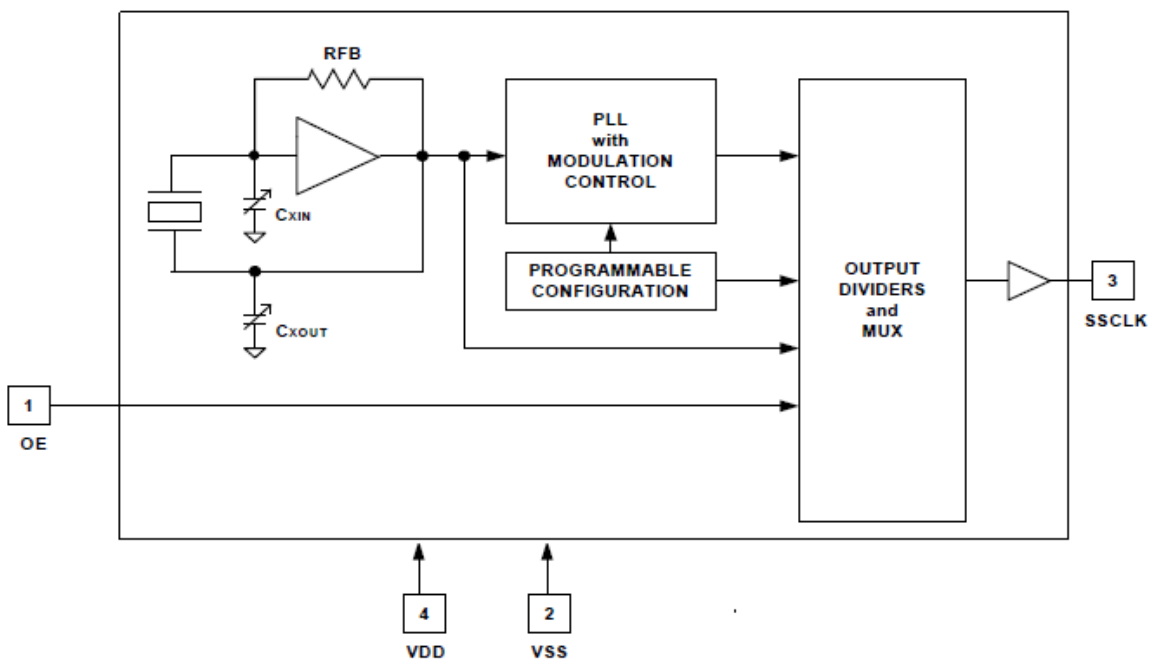


Contents

| | | | |
|---|----------|--|-----------|
| Pin Configuration | 3 | Ordering Information | 8 |
| Pin Definitions | 3 | Possible Configurations | 8 |
| Functional Description | 3 | Ordering Code Definitions | 8 |
| Programming Description | 3 | Package Drawings and Dimensions | 10 |
| Factory and Field Programmable CY25701 | 3 | Acronyms | 11 |
| Output Frequency, SSCLK Output (SSCLK, pin 3) | 3 | Document Conventions | 11 |
| Spread Percentage (SSCLK, pin 3) | 3 | Units of Measure | 11 |
| Frequency Modulation (SSCLK, pin 3) | 3 | Document History Page | 12 |
| Absolute Maximum Ratings | 4 | Sales, Solutions, and Legal Information | 13 |
| Operating Conditions | 4 | Worldwide Sales and Design Support | 13 |
| DC Electrical Characteristics | 5 | Products | 13 |
| AC Electrical Characteristics | 5 | PSoC® Solutions | 13 |
| Application Circuit | 6 | Cypress Developer Community | 13 |
| Switching Waveforms | 6 | Technical Support | 13 |
| Informational Graphs^[4] | 7 | | |

Pin Configuration

Figure 1. 4-pin Ceramic SMD pinout



Pin Definitions

4-pin Ceramic SMD

| Pin | Name | Description |
|-----|-------|---|
| 1 | OE | Output Enable pin: Active HIGH. If OE = 1, SSCLK is enabled |
| 2 | VSS | Power supply ground |
| 3 | SSCLK | Spread spectrum clock output (with or without spread) |
| 4 | VDD | 3.3 V power supply |

Functional Description

The CY25701 is a Spread Spectrum Crystal Oscillator (SSXO) IC used to reduce the EMI found in today's high speed digital electronic systems.

The device uses a Cypress proprietary PLL and Spread Spectrum Clock (SSC) technology to synthesize and modulate the frequency of the embedded input crystal. By frequency modulating the clock, the measured EMI at the fundamental and harmonic frequencies are greatly reduced. This reduction in radiated energy significantly reduces the cost of complying with regulatory agency (EMC) requirements and improves time-to-market without degrading system performance.

The CY25701 uses a programmable configuration memory array to synthesize output frequency and spread percentage.

The spread percentage is programmed to center spread or down spread with various spread percentages. The range for center spread is from $\pm 0.25\%$ to $\pm 2.00\%$. The range for down spread is from -0.5% to -4.0% . Contact the factory for smaller or larger spread percentage amounts if required. See [Table 2 on page 4](#) for spread selection and no spread values.

The frequency modulated SSCLK output is programmable from 10 to 166 MHz.

The CY25701 is available in a 4-pin ceramic SMD package with an operating temperature range of $-40\text{ }^{\circ}\text{C}$ to $85\text{ }^{\circ}\text{C}$.

Programming Description

Factory and Field Programmable CY25701

Factory and field programming is available for samples and manufacturing by Cypress and its distributors. Submit your request to the local Cypress Field Application Engineer (FAE) or sales representative. Once the request is processed, you receive a new part number, samples, and data sheet with the programmed values. This part number is used for additional sample request and the production orders. Contact your local Cypress FAE or sales representative for details.

Additional information on the CY25701 is available at the Cypress web site www.cypress.com.

Output Frequency, SSCLK Output (SSCLK, pin 3)

The modulated frequency at the SSCLK output is produced by synthesizing from the embedded crystal oscillator frequency input. The range of synthesized clock is from 10 to 166 MHz.

Spread Percentage (SSCLK, pin 3)

The SSCLK spread is programmable to various spread percentage values from $\pm 0.25\%$ to $\pm 2.0\%$ for center spread and from -0.5% to -4.0% for down spread. See [Table 2 on page 4](#) for available spread options. Enter $\pm 0.0\%$ (No spread) for XO (crystal oscillator) without spread option.

Frequency Modulation (SSCLK, pin 3)

The default frequency modulation is programmed at 31.5 kHz for all SSCLK frequencies from 10 to 166 MHz. Alternate frequency modulations at 30.1 kHz or 32.9 kHz are selectable using CyberClocks™ Online software. Contact the factory for other alternate modulation frequencies if required.

Table 1. Programming Data Requirement

| Pin Function | Output Frequency | Spread Percent Code ^[1] | Frequency Modulation |
|---------------|------------------|------------------------------------|----------------------|
| Pin Name | SSCLK | SSCLK | SSCLK |
| Pin# | 3 | 3 | 3 |
| Units | MHz | % | kHz |
| Program Value | ENTER DATA | ENTER DATA | ENTER DATA 31.5 |

Table 2. Spread Percent Selection

| Center Spread | Code | A | B | C | D | E | F | Z |
|---------------|------------|--------|-------|--------|-------|-------|-------|-------|
| | Percentage | ±0.25% | ±0.5% | ±0.75% | ±1.0% | ±1.5% | ±2.0% | ±0.0% |
| Down Spread | Code | G | H | J | K | L | M | Z |
| | Percentage | -0.5% | -1.0% | -1.5% | -2.0% | -3.0% | -4.0% | ±0.0% |

Absolute Maximum Ratings

Supply Voltage (V_{DD}) -0.5 V to +7.0 V
 DC Input Voltage -0.5 V to $V_{DD} + 0.5$ V

Storage Temperature
 (Non-condensing) -55 °C to +100 °C
 Junction Temperature -40 °C to +125 °C
 Data Retention at $T_J = 125$ °C > 10 years
 Package Power Dissipation 350 mW

Operating Conditions

| Parameter | Description | Min | Typ | Max | Unit |
|-------------|--|------|------|------|------|
| V_{DD} | Supply voltage | 3.00 | 3.30 | 3.60 | V |
| T_A | Ambient temperature (commercial) | -20 | - | 70 | °C |
| T_A | Ambient temperature (industrial) | -40 | - | 85 | °C |
| C_{LOAD} | Max. load capacitance at pin 3 | - | - | 15 | pF |
| F_{SSCLK} | SSCLK output frequency, $C_{LOAD} = 15$ pF | 10 | - | 166 | MHz |
| F_{MOD} | Spread Spectrum Modulation Frequency | 30.0 | 31.5 | 33.0 | kHz |
| T_{PU} | Power up time for V_{DD} to reach minimum specified voltage (power ramp must be monotonic) | 0.05 | - | 500 | ms |

Note

- ±0.0% or Code "Z" for XO (No-Spread) option.

DC Electrical Characteristics

| Parameter | Description | Condition | Min | Typ | Max | Unit |
|----------------|------------------------------------|--|---------------------|-----|---------------------|---------------|
| I_{OH} | Output high current (pin 3) | $V_{OH} = V_{DD} - 0.5\text{ V}$, $V_{DD} = 3.3\text{ V}$ (source) | 10 | 12 | – | mA |
| I_{OL} | Output low current (pin 3) | $V_{OL} = 0.5\text{ V}$, $V_{DD} = 3.3\text{ V}$ (sink) | 10 | 12 | – | mA |
| V_{IH} | Input high voltage (pin 1) | CMOS levels, 70% of V_{DD} | $0.7 \times V_{DD}$ | – | V_{DD} | V |
| V_{IL} | Input low voltage (pin 1) | CMOS levels, 30% of V_{DD} | – | – | $0.3 \times V_{DD}$ | V |
| I_{IH} | Input high current (pin 1) | $V_{in} = V_{DD}$ | – | – | 10 | μA |
| I_{IL} | Input low current (pin 1) | $V_{in} = V_{SS}$ | – | – | 10 | μA |
| I_{OZ} | Output leakage current (pin 3) | Three-state output, $OE = 0$ | –10 | – | 10 | μA |
| $C_{IN}^{[2]}$ | Input capacitance (pin 1) | Pin 1, or OE | – | 5 | 7 | pF |
| I_{VDD} | Supply current | $V_{DD} = 3.3\text{ V}$, $SSCLK = 10$ to 166 MHz , $C_{LOAD} = 0$, $OE = V_{DD}$ | – | – | 50 | mA |
| $\Delta f/f$ | Initial accuracy at room temp. | $T_A = 25\text{ }^\circ\text{C}$, 3.3 V | –25 | – | 25 | ppm |
| | Freq. stability over temp. range | $T_A = -20\text{ }^\circ\text{C}$ to $70\text{ }^\circ\text{C}$, 3.3 V | –25 | – | 25 | ppm |
| | Freq. stability over voltage range | 3.0 to 3.6 V | –12 | – | 12 | ppm |
| | Aging | $T_A = 25\text{ }^\circ\text{C}$, First year | –5 | – | 5 | ppm |

AC Electrical Characteristics


| Parameter ^[2] | Description | Condition | Min | Typ | Max | Unit |
|--------------------------|--|--|-----|-----|-----------------|------|
| DC | Output Duty Cycle | SSCLK, Measured at $V_{DD}/2$ | 45 | 50 | 55 | % |
| t_R | Output Rise Time | 20%–80% of V_{DD} , $C_L = 15\text{ pF}$ | – | – | 2.7 | ns |
| t_F | Output Fall Time | 20%–80% of V_{DD} , $C_L = 15\text{ pF}$ | – | – | 2.7 | ns |
| $T_{CCJ1}^{[3]}$ | Cycle-to-Cycle Jitter SSCLK (Pin 3) | SSCLK $\geq 133\text{ MHz}$, Measured at $V_{DD}/2$ | – | 85 | 200 | ps |
| | | $25\text{ MHz} \leq SSCLK < 133\text{ MHz}$, Measured at $V_{DD}/2$ | – | 215 | 400 | ps |
| | | SSCLK $< 25\text{ MHz}$, Measured at $V_{DD}/2$ | – | – | 1% of 1/SSCK | s |
| T_{OE1} | Output Disable Time (pin1 = OE) | Time from falling edge on OE to stopped outputs (Asynchronous) | – | 150 | 350 | ns |
| T_{OE2} | Output Enable Time (pin1 = OE) | Time from rising edge on OE to outputs at a valid frequency (Asynchronous) | – | 150 | 350 | ns |
| T_{LOCK} | PLL Lock Time | Time for SSCLK to reach valid frequency | – | – | 10 | ms |

Notes

- Guaranteed by characterization, not fully tested.
- For more information on Jitter Specifications, please see whitepaper - Datasheet Jitter Specifications for Cypress Timing Products available at <http://www.cypress.com/?riD=12791>.

Application Circuit

Figure 2. Application Circuit Diagram

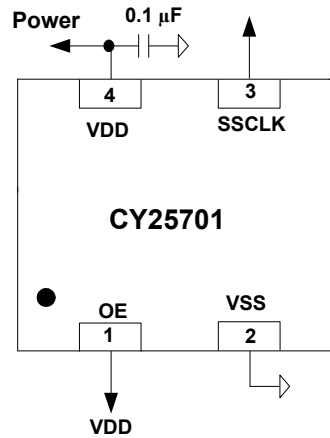

Switching Waveforms

Figure 3. Duty Cycle Waveform

Duty Cycle Timing ($DC = t_{1A}/t_{1B}$)


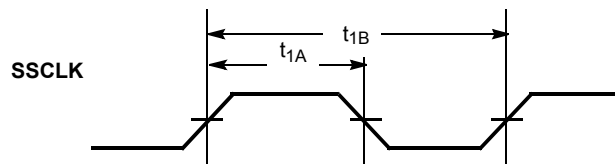


Figure 4. Output Rise/Fall Time Waveform

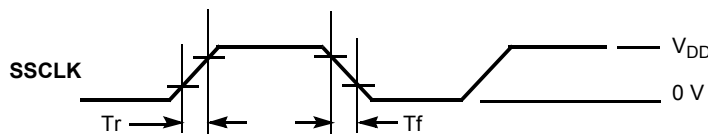


Output Rise time (T_r) = $(0.6 \times V_{DD})/SR1$ (or $SR3$)





Output Fall time (T_f) = $(0.6 \times V_{DD})/SR2$ (or $SR4$)

Refer to AC Electrical Characteristics table for SR (Slew Rate) values.

Figure 5. Output Enable/Disable Timing Waveforms

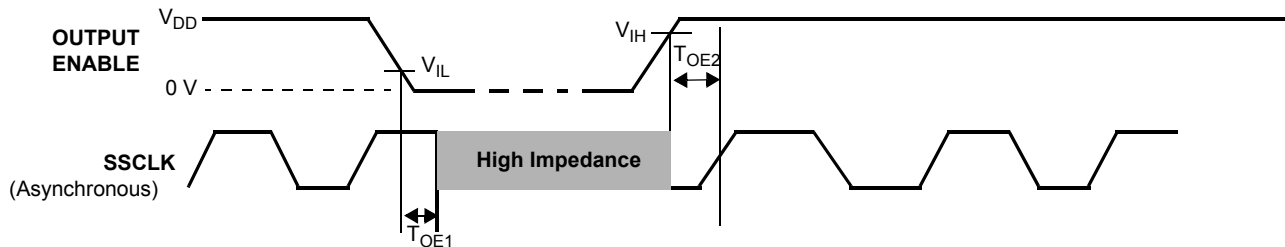

Informational Graphs^[4]

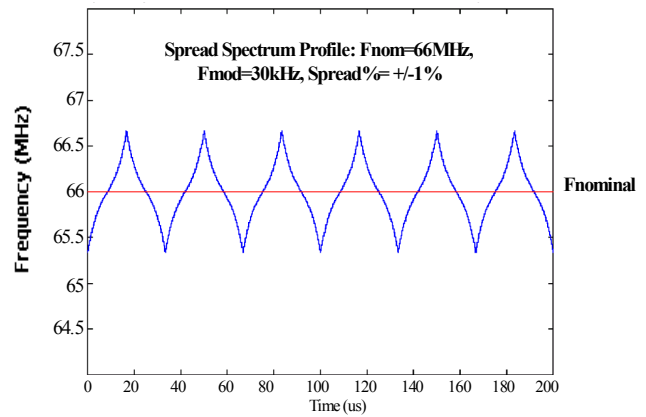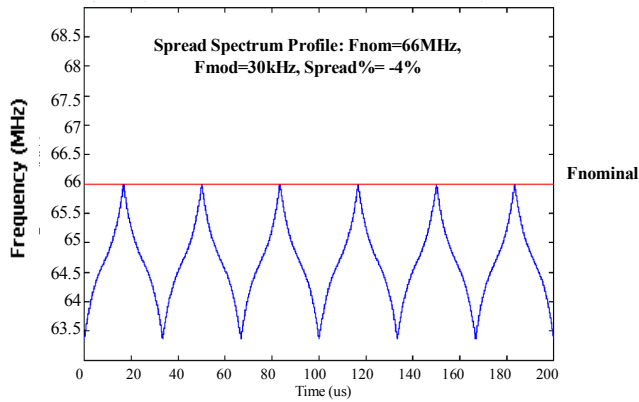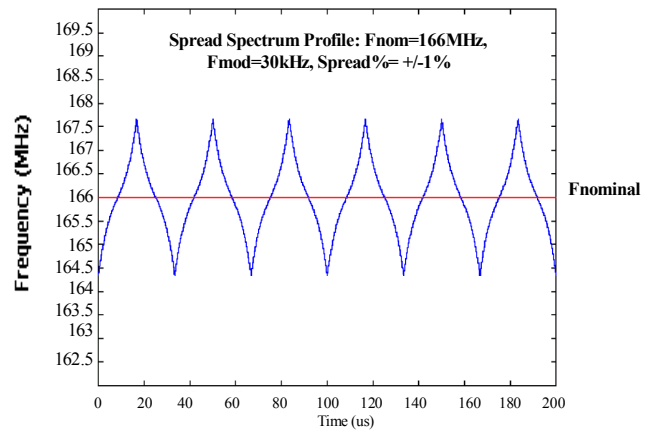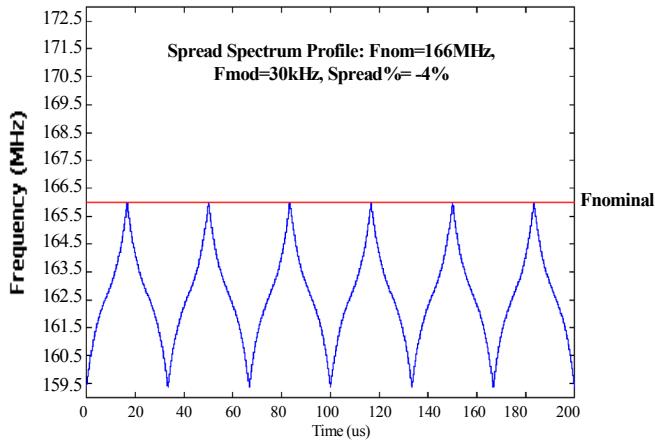

Note

4. The "Informational Graphs" are meant to convey typical performance levels. No performance specifications are implied or guaranteed. Refer to the tables on pages three and four for device specifications.

Ordering Information


| Part Number | Package Description | Product Flow |
|-----------------------|---|-----------------------------|
| Pb-free | | |
| CY25701FLXCT [5, 6] | 4-pin Ceramic LCC SMD – Tape and Reel | Commercial, 0 °C to 70 °C |
| CY25701FLXIT [5, 6] | 4-pin Ceramic LCC SMD – Tape and Reel | Industrial, –40 °C to 85 °C |
| Programmer | | |
| CY3672-USB | Programming Kit | |
| CY3724 Socket Adapter | Socket adapter board, for programming CY25701 | |

Possible Configurations

Some product offerings are factory programmed customer specific devices with customized part numbers. The Possible Configurations table shows the available device types, but not complete part numbers. Contact your local Cypress FAE or Sales Representative for more information.

| Part Number | Package Description | Product Flow |
|-----------------------|---------------------------------------|-----------------------------|
| Pb-free | | |
| CY25701LXCzzzT [6, 7] | 4-pin Ceramic LCC SMD – Tape and Reel | Commercial, 0 °C to 70 °C |
| CY25701LXIzzzT [6, 7] | 4-pin Ceramic LCC SMD – Tape and Reel | Industrial, –40 °C to 85 °C |


Ordering Code Definitions

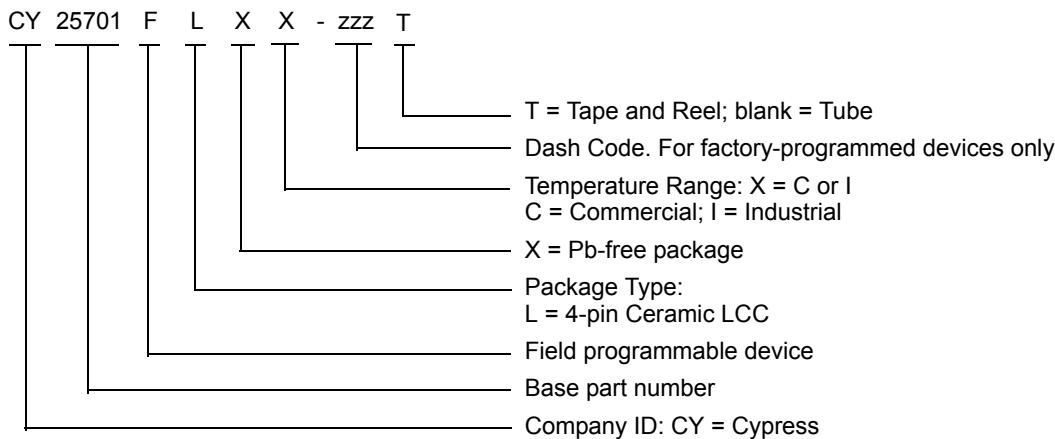

Notes

5. "FLX" suffix is used for products programmed in the field by Cypress distributors.
6. Temp can be C (Commercial) or I (Industrial).
7. "ZZZ" denotes the assigned product dash number. This number is assigned by the factory after the output frequency and spread percent programming data is received from the customer. For more details, contact your local Cypress FAE or Sales Representative.

Figure 6. Actual Marking [8]

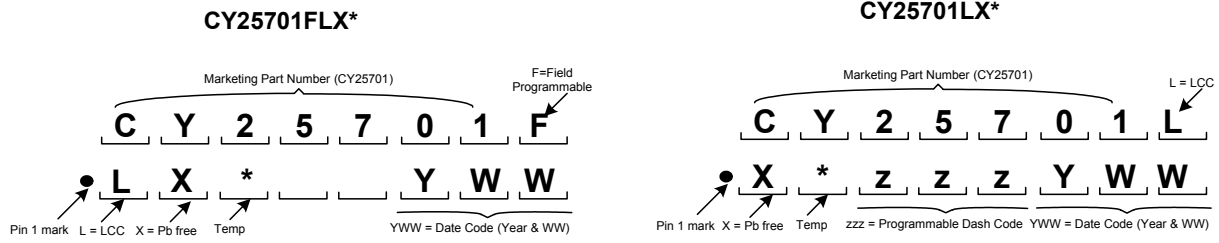


Note

8. Temp can be C (Commercial) or I (Industrial).

Package Drawings and Dimensions

Figure 7. 4-pin Ceramic LCC (3.2 × 5.0 × 1.3 mm) LZ04A Package Outline, 001-02743

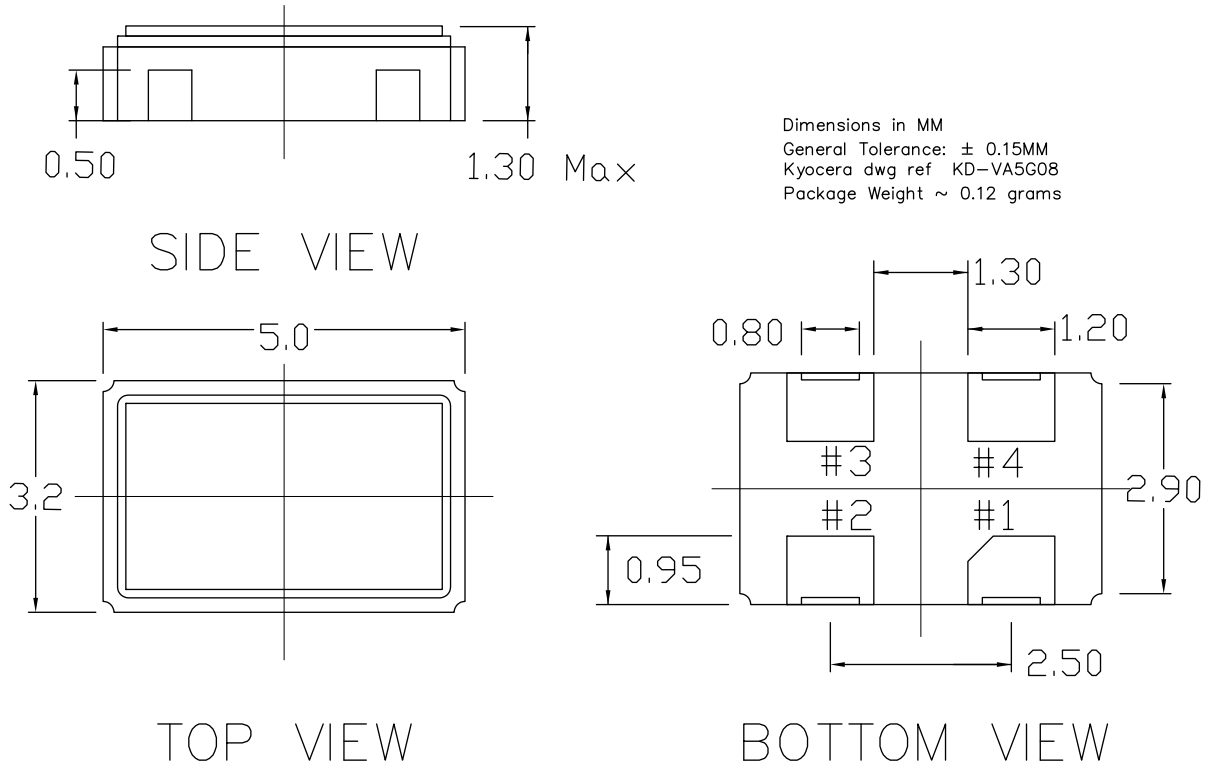

001-02743 *G

Acronyms

| Acronym | Description |
|---------|---|
| CMOS | Complementary Metal Oxide Semiconductor |
| EMC | Electromagnetic Compliance |
| EMI | Electromagnetic Interference |
| FAE | Field Application Engineer |
| LCC | Leadless Chip Carrier |
| OE | Output Enable |
| PLL | Phase Locked Loop |
| SMD | Surface Mount Device |
| SSC | Spread Spectrum Clock |
| SSXO | Spread Spectrum Crystal Oscillator |
| XO | Crystal Oscillator |

Document Conventions

Units of Measure

| Symbol | Unit of Measure |
|--------|-------------------|
| °C | degree Celsius |
| kHz | kilohertz |
| MHz | megahertz |
| μA | microampere |
| μF | microfarad |
| mA | milliampere |
| mm | millimeter |
| ms | millisecond |
| mW | milliwatt |
| ns | nanosecond |
| Ω | ohm |
| % | percent |
| pF | picofarad |
| ppm | parts per million |
| ps | picosecond |
| s | second |
| V | volt |

Document History Page

| Document Title: CY25701, Programmable High Frequency Crystal Oscillator with Spread Spectrum (SSXO) and No Spread Spectrum (XO) Option Document Number: 001-07313 | | | | |
|--|---------|-----------------|-----------------|---|
| REV. | ECN | Orig. of Change | Submission Date | Description of Change |
| ** | 442944 | RGL | See ECN | New data sheet |
| *A | 487736 | KKVTMP | See ECN | Added Industrial temp |
| *B | 1414203 | DPF / VED | See ECN | Replaced the Package Drawing and Dimension figure on page seven and various copy edits; The reference to the software is now CyberClocks™ Online rather than CyberClocks software. |
| *C | 2542310 | AESA | 07/24/08 | Added Note “Not recommended for new designs.” Added part number CY25701KFLXCT, CY25701KFLXIT, CY25701KLXCzzzT, and CY25701KLXlzzzT in Ordering Information . Added note reference 5 to CY25701KFLXCT and CY25701KFLXIT, and note reference 6 to CY25701KLXCzzzT and CY25701KLXlzzzT. Updated to new template. |
| *D | 2624529 | CXQ / PYRS | 12/18/08 | Removed Note “Not recommended for new designs.” Removed part number CY25701KFLXCT, CY25701KFLXIT, CY25701KLXCzzzT, and CY25701KLXlzzzT in Ordering Information . |
| *E | 2897744 | CXQ | 03/23/2010 | Moved ‘ZZZ’ parts to Possible Configurations table Updated Package Drawings and Dimensions . |
| *F | 3381730 | PURU | 09/26/2011 | Updated Benefits (Replaced “CY3672 programming kit” with “CY3672-USB programming kit” and given hyperlink to the same as “ http://www.cypress.com/?rID=44009 ” and also given hyperlink to “CY3724 socket adapters” as “ http://www.cypress.com/?rID=37857 ”). Updated Logic Block Diagram (Replaced the previous Logic Block Diagram with the present Logic Block Diagram). Added Ordering Code Definitions . Updated Package Drawings and Dimensions (Updated the next revision package outline for Figure 7). Added Acronyms and Units of Measure . Updated to new template. |
| *G | 4556401 | TAVA | 10/30/2014 | Updated Package Drawings and Dimensions : spec 001-02743 – Changed revision from *E to *G. Updated to new template. Completing Sunset Review. |

Sales, Solutions, and Legal Information

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

Products

| | |
|--|--|
| Automotive | cypress.com/go/automotive |
| Clocks & Buffers | cypress.com/go/clocks |
| Interface | cypress.com/go/interface |
| Lighting & Power Control | cypress.com/go/powerpsoc cypress.com/go/plc |
| Memory | cypress.com/go/memory |
| PSoC | cypress.com/go/psoc |
| Touch Sensing | cypress.com/go/touch |
| USB Controllers | cypress.com/go/USB |
| Wireless/RF | cypress.com/go/wireless |

PSoC[®] Solutions

[psoc.cypress.com/solutions](#)
[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#)

Cypress Developer Community

[Community](#) | [Forums](#) | [Blogs](#) | [Video](#) | [Training](#)

Technical Support

[cypress.com/go/support](#)

© Cypress Semiconductor Corporation, 2006-2014. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Any Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress.

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress' product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.