

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

Features

- One LVPECL output pair
- Output frequency: 312.5 MHz
- External crystal frequency: 25 MHz
- Low RMS phase jitter at 312.5 MHz, using 25 MHz crystal (1.875 MHz to 20 MHz): 0.3 ps (typical)
- Pb-free 8-Pin TSSOP package
- Supply voltage: 3.3 V or 2.5 V
- Commercial and industrial temperature ranges

Logic Block Diagram

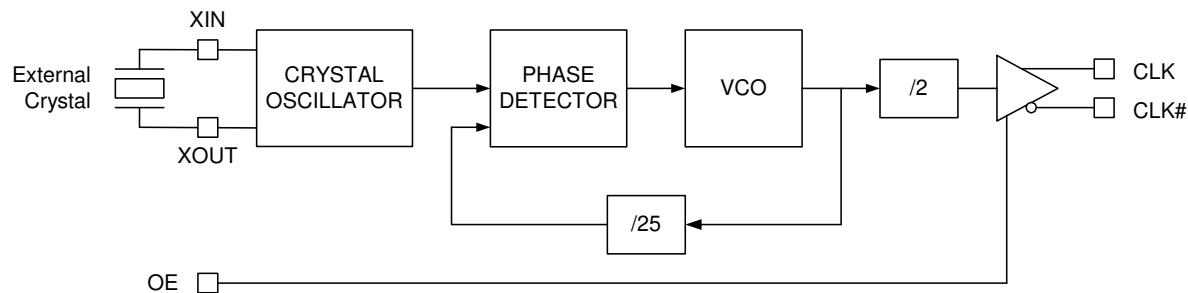

Pinouts

Figure 1. Pin Diagram – 8-Pin TSSOP

VDD	1	8	VDD
VSS	2	7	CLK
XOUT	3	6	CLK#
XIN	4	5	OE

Table 1. Pin Definition – 8-Pin TSSOP

Pin Number	Pin Name	I/O Type	Description
1, 8	VDD	Power	3.3 V or 2.5 V power supply. All supply current flows through pin 1
2	VSS	Power	Ground
3, 4	XOUT, XIN	XTAL Output and Input	Parallel resonant crystal interface
5	OE	CMOS Input	Output enable. When HIGH, the output is enabled. When LOW, the output is high impedance
6,7	CLK#, CLK	LVPECL Output	Differential clock output

Frequency Table

Inputs		Output Frequency (MHz)
Crystal Frequency (MHz)	PLL Multiplier Value	
25	12.5	312.5

Absolute Maximum Conditions

Parameter	Description	Conditions	Min	Max	Unit	
V_{DD}	Supply Voltage		-0.5	4.4	V	
$V_{IN}^{[1]}$	Input Voltage, DC	Relative to V_{SS}	-0.5	$V_{DD} + 0.5$	V	
T_S	Temperature, Storage	Non operating	-65	150	°C	
T_J	Temperature, Junction		-	135	°C	
ESD_{HBM}	ESD Protection, Human Body Model	JEDEC STD 22-A114-B	2000	-	V	
UL-94	Flammability Rating	At 1/8 in.	V-0			
$\Theta_{JA}^{[2]}$	Thermal Resistance, Junction to Ambient	0 m/s airflow	100		°C/W	
		1 m/s airflow	91			
		2.5 m/s airflow	87			

Operating Conditions

Parameter	Description	Min	Max	Unit
V_{DD}	3.3 V Supply Voltage	3.135	3.465	V
	2.5 V Supply Voltage	2.375	2.625	V
T_A	Ambient Temperature, Commercial	0	70	°C
	Ambient Temperature, Industrial	-40	85	°C
T_{PU}	Power-up time for all V_{DD} to reach minimum specified voltage (ensure power ramps is monotonic)	0.05	500	ms

Notes

1. The voltage on any input or I/O pin cannot exceed the power pin during power-up.
2. Simulated using Apache Sentinel TI software. The board is derived from the JEDEC multilayer standard. It measures 76 x 114 x 1.6 mm and has 4-layers of copper (2/1/1/2 oz.). The internal layers are 100% copper planes, while the top and bottom layers have 50% metalization. No vias are included in the model.

DC Electrical Characteristics

Parameter	Description	Test Conditions	Min	Typ	Max	Unit
I_{DD}	Operating Supply Current with Output Unterminated	$V_{DD} = 3.465 \text{ V}$, $OE = V_{DD}$, output unterminated	–	–	125	mA
		$V_{DD} = 2.625 \text{ V}$, $OE = V_{DD}$, output unterminated	–	–	120	mA
I_{DDT}	Operating Supply Current with Output Terminated	$V_{DD} = 3.465 \text{ V}$, $OE = V_{DD}$, output terminated	–	–	150	mA
		$V_{DD} = 2.625 \text{ V}$, $OE = V_{DD}$, output terminated	–	–	145	mA
V_{OH}	LVPECL Output High Voltage	$V_{DD} = 3.3 \text{ V}$ or 2.5 V , $R_{TERM} = 50\Omega$ to $V_{DD} - 2.0 \text{ V}$	$V_{DD} - 1.15$	–	$V_{DD} - 0.75$	V
V_{OL}	LVPECL Output Low Voltage	$V_{DD} = 3.3 \text{ V}$ or 2.5 V , $R_{TERM} = 50\Omega$ to $V_{DD} - 2.0 \text{ V}$	$V_{DD} - 2.0$	–	$V_{DD} - 1.625$	V
V_{OD1}	LVPECL Peak-to-Peak Output Voltage Swing	$V_{DD} = 3.3 \text{ V}$ or 2.5 V , $R_{TERM} = 50\Omega$ to $V_{DD} - 2.0 \text{ V}$	600	–	1000	mV
V_{OD2}	LVPECL Output Voltage Swing ($V_{OH} - V_{OL}$)	$V_{DD} = 2.5 \text{ V}$, $R_{TERM} = 50\Omega$ to $V_{DD} - 1.5 \text{ V}$	500	–	1000	mV
V_{OCM}	LVPECL Output Common Mode Voltage ($V_{OH} + V_{OL}$)/2	$V_{DD} = 2.5 \text{ V}$, $R_{TERM} = 50\Omega$ to $V_{DD} - 1.5 \text{ V}$	1.2	–	–	V
I_{OZ}	LVPECL Output Leakage Current	Output off, $OE = V_{SS}$	–35	–	35	μA
V_{IH}	Input High Voltage, OE Pin		0.7* V_{DD}	–	$V_{DD} + 0.3$	V
V_{IL}	Input Low Voltage, OE Pin		–0.3	–	0.3* V_{DD}	V
I_{IH}	Input High Current, OE Pin	$OE = V_{DD}$	–	–	115	μA
I_{IL}	Input Low Current, OE Pin	$OE = V_{SS}$	–50	–	–	μA
$C_{IN}^{[5]}$	Input Capacitance, OE Pin		–	15	–	pF
$C_{INX}^{[5]}$	Pin Capacitance, XIN & XOUT		–	4.5	–	pF

AC Electrical Characteristics^[5]

Parameter	Description	Conditions	Min	Typ	Max	Unit
F_{OUT}	Output Frequency		–	312.5	–	MHz
T_R , $T_F^{[3]}$	Output Rise or Fall Time	20% to 80% of full output swing	–	0.5	1.0	ns
$T_{Jitter}(\phi)^{[6]}$	RMS Phase Jitter (Random)	312.5 MHz, (1.875 to 20 MHz)	–	0.3	–	ps
$T_{DC}^{[7]}$	Output Duty Cycle	Measured at zero crossing point	45	–	55	%
T_{OHZ}	Output Disable Time	Time from falling edge on OE to stopped outputs (Asynchronous)	–	–	100	ns
T_{OE}	Output Enable Time	Time from rising edge on OE to outputs at a valid frequency (Asynchronous)	–	–	100	ns
T_{LOCK}	Startup Time	Time for CLK to reach valid frequency measured from the time $V_{DD} = V_{DD}(\text{min.})$	–	–	5	ms

Recommended Crystal Specifications^[4]

Parameter	Description	Min	Max	Unit
Mode	Mode of Oscillation		Fundamental	
F	Frequency	25	25	MHz
ESR	Equivalent Series Resistance	–	50	Ω
C_S	Shunt Capacitance	–	7	pF

Parameter Measurements

Figure 2. 3.3 V Output Load AC Test Circuit

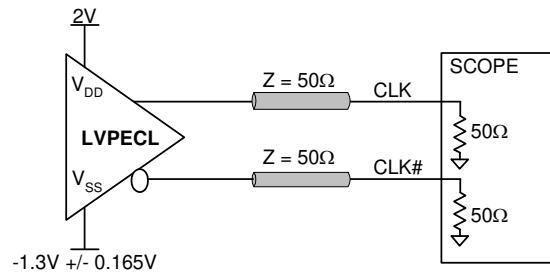


Figure 3. 2.5 V Output Load AC Test Circuit

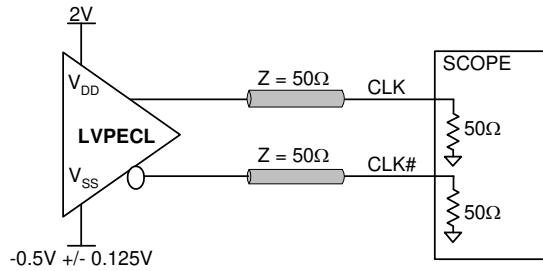


Figure 4. Output DC Parameters





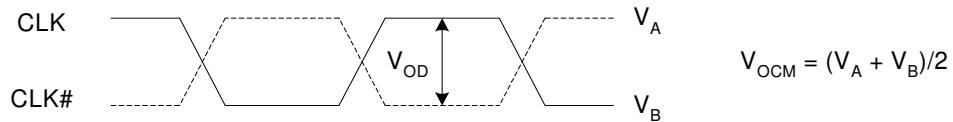


Figure 5. Output Rise and Fall Time

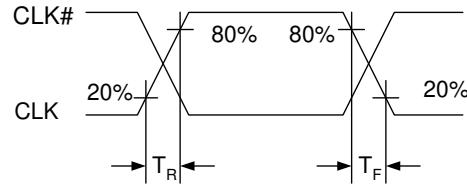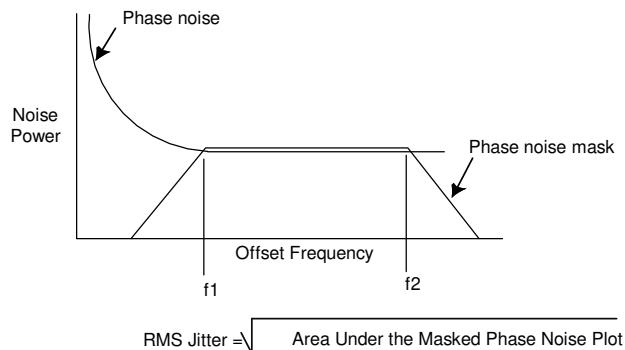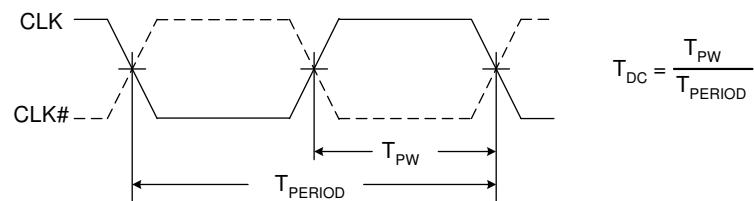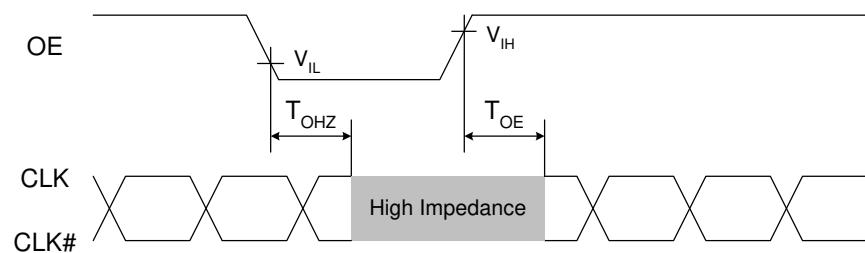

Notes

3. Refer to [Figure 5 on page 4](#).
4. Characterized using an 18 pF parallel resonant crystal.
5. Not 100% tested, guaranteed by design and characterization.
6. Refer to [Figure 6 on page 5](#).
7. Refer to [Figure 7 on page 5](#).

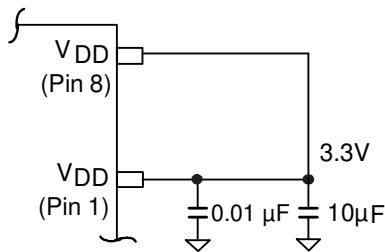
Figure 6. RMS Phase Jitter

Figure 7. Output Duty Cycle

Figure 8. Output Enable Timing


Application Information

Power Supply Filtering Techniques

As in any high speed analog circuitry, noise at the power supply pins can degrade performance. To achieve optimum jitter performance, use good power supply isolation practices. [Figure 9](#) illustrates a typical filtering scheme. Because all of the current flows through pin 1, the resistance and inductance between this pin and the supply is minimized. A 0.01 or 0.1 μ F ceramic chip capacitor is also located close to this pin to provide a short and low impedance AC path to ground. A 1 to 10 μ F ceramic or tantalum capacitor is located in the general vicinity of this device and may be shared with other devices.

Figure 9. Power Supply Filtering




Termination for LVPECL Output

The CY2XP31 implements its LVPECL driver with a current steering design. For proper operation, it requires a 50 ohm dc termination on each of the two output signals. For 3.3 V operation, this data sheet specifies output levels for termination to V_{DD} –2.0 V. This same termination voltage can also be used for V_{DD} = 2.5 V operation, or it can be terminated to V_{DD} –1.5 V. Note that it is also possible to terminate with 50 ohms to ground (V_{SS}), but the high and low signal levels differ from the data sheet values. Termination resistors are best located close to the destination device. To avoid reflections, trace characteristic impedance (Z_0) should match the termination impedance. [Figure 10](#) shows a standard termination scheme.

[Figure 10](#) shows a standard termination scheme.


Figure 10. LVPECL Output Termination

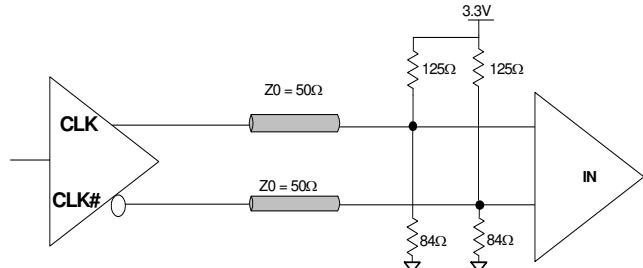

Crystal Input Interface

The CY2XP31 is characterized with 18 pF parallel resonant crystals. The capacitor values shown in [Figure 11](#) are determined using a 25 MHz 18 pF parallel resonant crystal and are chosen to minimize the ppm error. Note that the optimal values for C1 and C2 depend on the parasitic trace capacitance and are therefore layout dependent.


Figure 11. Crystal Input Interface

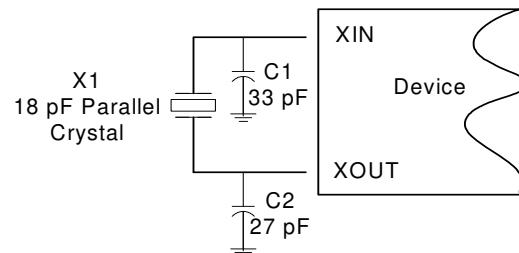

Ordering Information


Part Number	Package Type	Product Flow
CY2XP31ZXC	8-Pin TSSOP	Commercial, 0°C to 70°C
CY2XP31ZXCT	8-Pin TSSOP – Tape and Reel	Commercial, 0°C to 70°C
CY2XP31ZXI	8-Pin TSSOP	Industrial, -40°C to 85°C
CY2XP31ZXIT	8-Pin TSSOP – Tape and Reel	Industrial, -40°C to 85°C

Ordering Code Definitions

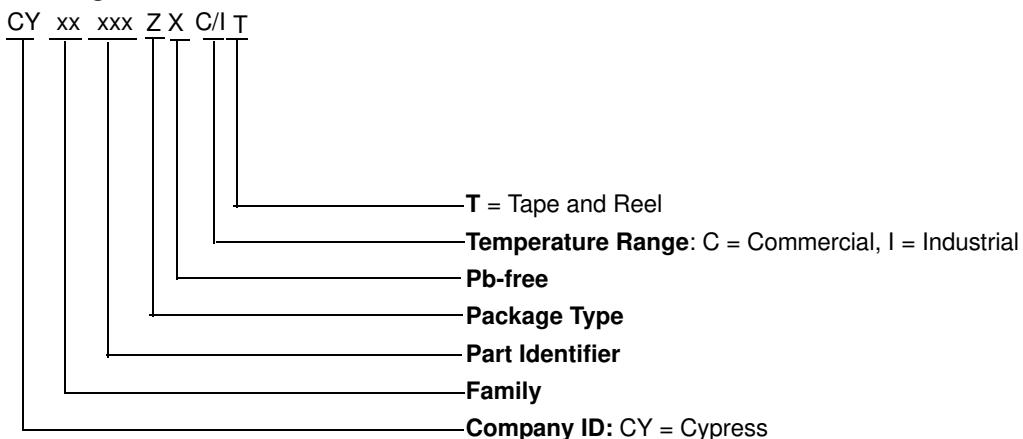

Package Drawing and Dimensions

Figure 12. 8-Pin Thin Shrunk Small Outline Package (4.40 MM Body) Z8

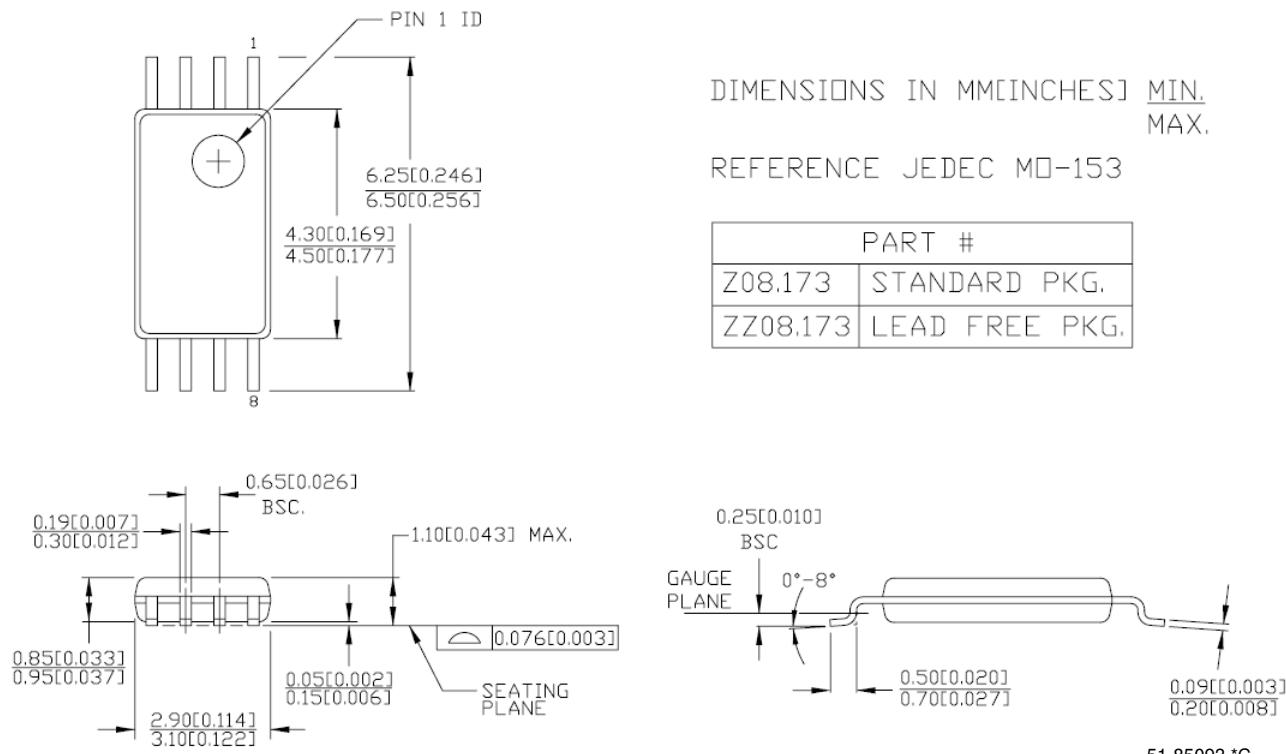

Acronyms

Table 2. Acronyms Used

Acronym	Description
CLKOUT	Clock output
CMOS	Complementary metal oxide semiconductor
DPM	Die pick map
EPROM	Erasable programmable read only memory
LVDS	Low-voltage differential signaling
LVPECL	Low voltage positive emitter coupled logic
NTSC	National television system committee
OE	Output enable
PAL	Phase alternate line
PD	Power-down
PLL	Phase locked loop
PPM	Parts per million
TTL	Transistor transistor logic

Document Conventions

Table 3. Units of Measure

Symbol	Unit of Measure
°C	degrees Celsius
kHz	kilohertz
kΩ	kilohms
MHz	megahertz
MΩ	megaohms
µA	microamperes
µs	microseconds
µV	microvolts
µVrms	microvolts root-mean-square
mA	milliamperes
mm	millimeters
ms	milliseconds
mV	millivolts
nA	nanoamperes
ns	nanoseconds
nV	nanovolts
Ω	ohms

Document History Page

Document Title: CY2XP31 312.5 MHz LVPECL Clock Generator
Document Number: 001-06385

Revision	ECN	Orig. of Change	Submission Date	Description of Change
**	422680	RGL	See ECN	New data sheet
*A	506198	RGL	See ECN	Supplied values in TBDs, Change status from Advance Information to Preliminary
B	1337067	JWK / KVM /ARI	See ECN	Changed VCC to VDD*, VEE to VSS, Gave pins 1 and 8 the same name (VDD), Added MSL and CIN specifications, Removed pull up from pin 5, Changed V_{IL} , V_{IH} , I_{IH} , I_{DD} , I_{DDA} , V_{OH} , V_{OL} , t_R and t_F specifications, Added commercial temperature, Changed supply filtering recommendations Removed alternate termination figure, Cleaned up several drawings Fixed cross references and edited data sheet for template compliance, Title change
*C	2669117	KVM/ AESA	03/05/2009	Changed crystal frequency to 25 MHz only; removed other frequencies; output frequencies adjusted accordingly, Changed phase jitter value, Removed MSL spec Changed IIL and IIH values, Changed rise / fall time value from 350 ps to 500 ps Changed max junction temp from 125°C to 135°C, Added thermal resistance Clarified that IDD is with outputs loaded, Changed Data Sheet Status to Final.
*D	2700242	KVM/PYRS	04/30/2009	Typos: changed VCC to VDD OE pin capacitance changed from 7pF to 15pF Changed IDD footnote Reformatted AC & DC tables Added specs CINX and IOZ Added OE timing, and startup timing Added OE waveforms Added IDD for 2.5 V Changed footnote about external power dissipation
*E	2718433	WWZ/HMT	06/12/2009	No change. Submit to ECN for product launch.
*F	2767308	KVM	09/22/2009	Add I_{DD} spec for unterminated outputs Change parameter name for I_{DD} (terminated outputs) from I_{DD} to I_{DDT} Remove I_{DD} footnote about externally dissipated current Add footnote reference to C_{IN} and C_{INX} :not 100% tested Add max limit for T_R , T_F : 1.0 ns Change T_{LOCK} max from 10 ms to 5 ms
*G	2896121	KVM	03/19/2010	Updated Package Diagram (Figure 12)
*H	3219081	BASH	04/07/2011	Template and style updates as per current Cypress standards. Added ordering code definitions, acronyms, and units of measure. Updated package diagram to *C.

Sales, Solutions, and Legal Information

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

Products

Automotive	cypress.com/go/automotive
Clocks & Buffers	cypress.com/go/clocks
Interface	cypress.com/go/interface
Lighting & Power Control	cypress.com/go/powerpsoc cypress.com/go/plc
Memory	cypress.com/go/memory
Optical & Image Sensing	cypress.com/go/image
PSoC	cypress.com/go/psoc
Touch Sensing	cypress.com/go/touch
USB Controllers	cypress.com/go/USB
Wireless/RF	cypress.com/go/wireless

PSoC Solutions

psoc.cypress.com/solutions
 PSoC 1 | PSoC 3 | PSoC 5

© Cypress Semiconductor Corporation, 2006-2011. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Any Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and/or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress.

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress' product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.