



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





HYBRID THERMAL/EMI ABSORBER

CoolZorb 600 is a 2nd generation hybrid absorber/thermal management material that is used for EMI mitigation. Product is used like a traditional thermal interface material between heat source such as an IC and heat sink or other heat transfer device or metal chassis. CoolZorb 600 also functions to suppress unwanted energy coupling, resonances or surface currents causing board level EMI issues.

FEATURES AND BENEFITS

- Designed using silicone gel binder that imparts inherent tack typical of standard thermal gap fillers
- Filler particle composition imparts both good thermal conductivity and excellent EMI suppression in the microwave frequency range with best attenuation performance at or above 3 GHz.
- CoolZorb 600 passes UL94V0 requirements
- Product does not require peel and stick adhesive when used like a traditional thermal interface material

VALUE

- Dual functional properties of thermal conductivity and EMI reduction provide two in one solution for easier design and assembly and lower cost of ownership
- Improved reliability performance of electronics
 - Better signal integrity due to reduction of EMI
 - Consistent performance of electronics due to temperature stability and low outgassing properties of product
- Improved EMC performance and resultant lower cost to meet compliance requirements
- Environmentally friendly solution that meets regulatory requirements including RoHS and REACH

TYPICAL PROPERTIES	DATA	TEST METHOD
Color	Dark gray	Visual
Thermal conductivity	3.0W/m-K	ASTM D5470
Density	4.1 g/cc	ASTM D792
Hardness	60 Shore 00	ASTM D2240
Tensile strength	50 psi	ASTM D638
Temperature Range	-40°C to 175°C	NA
UL Flammability	UL94V0	UL
Volume resistivity	1 x 10 ¹² Ω*cm	ASTM D257
Outgassing (TML)	0.024%	ASTM E595-07
Outgassing (CVCM)	0.013%	ASTM E595-07
Coefficient of Thermal Expansion (CTE)	205 μm/mC	IPC-TM-650 2.4.41
EMI Attenuation @ 5 GHz	18.3 dB/cm	
EMI Attenuation @ 15 GHz	49.8 dB/cm	
Standard Thickness range	.020"-.125" (0.5-3.1mm)	
Thickness Tolerance	+/- .005" (+/- .127mm)	


Americas: +1.866.928.8181

Europe: +49.(0).8031.2460.0


Asia: +86.755.2714.1166

www.lairdtech.com


CoolZorb 600 Thermal resistance at 100C (ASTM D5470)

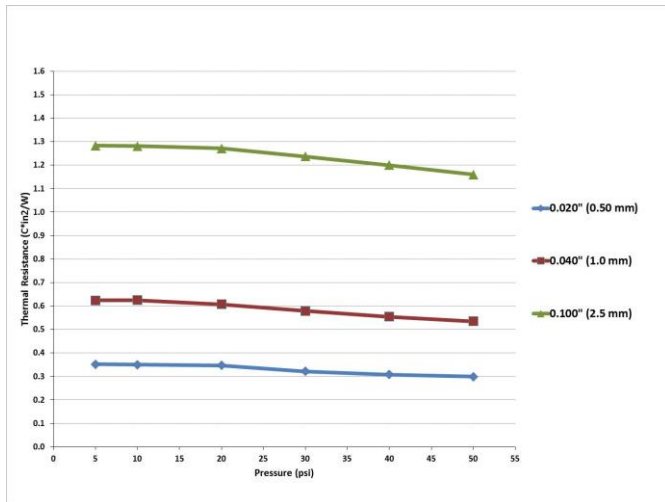

CoolZorb 600 Percent Deflection (ASTM D575)

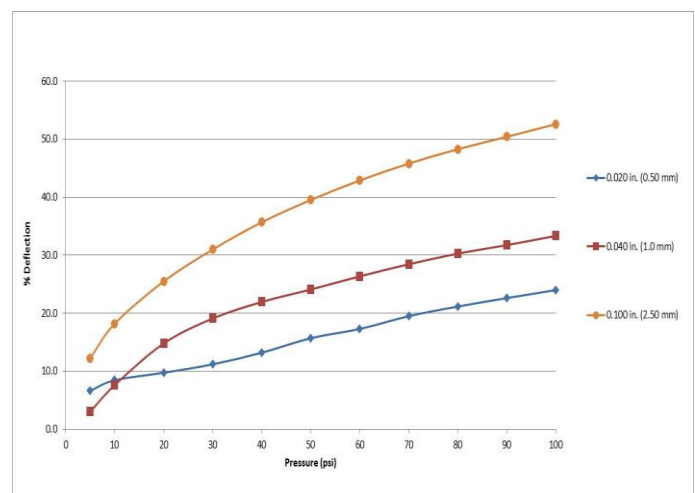

CoolZorb 600 Attenuation (dB/cm)

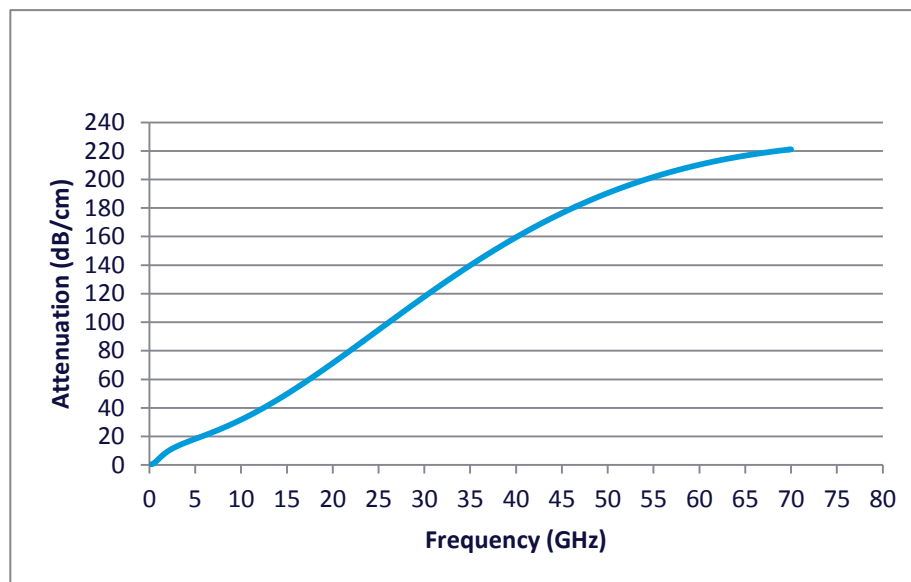

AVAILABILITY

- Standard sheet size is 12" X 12"
- Thickness availability range is .020" - .125" (0.5mm- 3.1mm)
- Common standards for thickness are .020", .040", .060", .080", .100" and .125" thickness (0.5mm, 1.0mm, 1.5mm, 2.0mm, 2.5mm and 3.1mm)
- No charge samples are available in 4" X 4" size for each of the above common thicknesses

PART NUMBER SYSTEM

- CoolZorb 600 series absorber sheets (12"X12") use the following designation when ordering: CZ600-XXX where XXX is thickness of absorber in thousands of an inch
- CoolZorb 600 series no charge absorber samples (4"X4") use the following designation when ordering: CZ600S-XXX where XXX is thickness of absorber in thousands of an inch
- Example: CZ600-020 = CoolZorb 600, .020"X12"X12" sheet size; Example: CZ600S-040 = CoolZorb 600, .040"X4"X4 no charge sample size

RFP-DS-COOLZORB 500 110915