



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CZRFR52C2 Thru CZRFR52C39

Voltage 2 to 39 Volts
 Power 350 mWatts
 RoHS Device




Features

- 350mW Power Dissipation.
- High Voltages from 2 ~ 39 V.
- Designed for mounting on small surface.
- Extremely thin/leadless package.
- Pb free product.

Mechanical data

- Case: 1005/SOD-323F Standard package
Molded plastic.
- Terminals: Gold plated, solderable per MIL-STD-750,method 2026.
- Polarity: Indicated by cathode band.
- Weight: 0.006 gram(approx.).

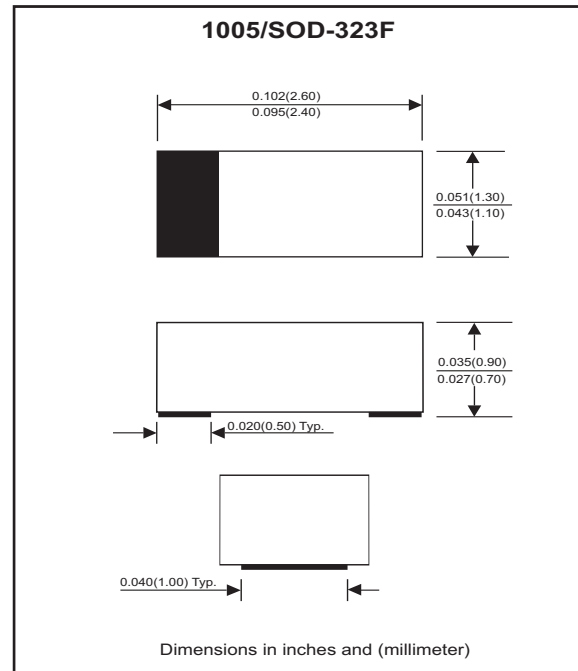

Maximum Rating AND Electrical Characteristics

Parameter	Symbol	Value	Unit
Maximum Forward Voltage Drop at $I_F = 10 \text{ mA}$	V_F	0.9	V
Maximum Power Dissipation at 25 °C	P_D	350	mW
Forward current , surge peak 8.3 ms single half sine-wave superimposed on rate load(JEDEC method)	I_{FSM}	2.0	A
Peak ESD voltage capability (IEC 61000-4-2)	V_{PV}	8	kV
Operating Junction and Storage Temperature Range	T_J	-55 to +125	°C

Company reserves the right to improve product design , functions and reliability without notice.

Electrical Characteristics (TA=25°C)

Part Number	Marking Code	Zener Voltage			Operating resistance		Rising operating Resistance		Reverse current	
		V _Z (V)			ZZT(Ohm)		ZZK(Ohm)		IR(μA)	
		Min	Max	I _Z (mA)	Max	I _Z (mA)	Max	I _Z (mA)	Max	V _R (V)
CZRFR52C2	Z0	1.90	2.10	5	100	5	600	1	100	1
CZRFR52C2V2	Z1	2.09	2.31	5	100	5	600	1	100	1
CZRFR52C2V4	Z2	2.28	2.52	5	85	5	600	1	100	1
CZRFR52C2V7	Z3	2.57	2.84	5	83	5	500	1	75	1
CZRFR52C3	Z4	2.85	3.15	5	95	5	500	1	50	1
CZRFR52C3V3	Z5	3.14	3.47	5	95	5	500	1	25	1
CZRFR52C3V6	Z6	3.42	3.78	5	95	5	500	1	15	1
CZRFR52C3V9	Z7	3.71	4.10	5	95	5	500	1	10	1
CZRFR52C4V3	Z8	4.09	4.52	5	95	5	500	1	5	1
CZRFR52C4V7	Z9	4.47	4.94	5	78	5	500	1	5	2
CZRFR52C5V1	ZA	4.85	5.36	5	60	5	480	1	0.1	0.8
CZRFR52C5V6	ZB	5.32	5.88	5	40	5	400	1	0.1	1
CZRFR52C6V2	ZC	5.89	6.51	5	10	5	200	1	0.1	2
CZRFR52C6V8	ZE	6.46	7.14	5	8	5	150	1	0.1	3
CZRFR52C7V5	ZF	7.13	7.88	5	7	5	50	1	0.1	5
CZRFR52C8V2	ZG	7.79	8.61	5	7	5	50	1	0.1	6
CZRFR52C9V1	ZH	8.65	9.56	5	10	5	50	1	0.1	7
CZRFR52C10	ZJ	9.50	10.50	5	15	5	70	1	0.1	7.5
CZRFR52C11	ZK	10.45	11.55	5	20	5	70	1	0.1	8.5
CZRFR52C12	ZM	11.40	12.60	5	20	5	90	1	0.1	9
CZRFR52C13	ZN	12.35	13.65	5	25	5	110	1	0.1	10
CZRFR52C15	ZP	14.25	15.75	5	30	5	110	1	0.1	11
CZRFR52C16	ZQ	15.20	16.80	5	40	5	170	1	0.1	12
CZRFR52C18	ZR	17.10	18.90	5	50	5	170	1	0.1	14
CZRFR52C20	ZS	19.00	21.00	5	50	5	220	1	0.1	15
CZRFR52C22	ZT	20.90	23.10	5	55	5	220	1	0.1	17
CZRFR52C24	ZU	22.80	25.20	5	80	5	220	1	0.1	18
CZRFR52C27	ZV	25.65	28.35	5	80	5	250	1	0.1	20
CZRFR52C30	ZW	28.50	31.50	5	80	5	250	1	0.1	23
CZRFR52C33	ZX	31.35	34.65	5	80	5	250	1	0.1	25
CZRFR52C36	ZY	34.20	37.80	5	90	5	250	1	0.1	27
CZRFR52C39	ZZ	37.05	40.95	5	90	5	300	1	0.1	29

RATING AND CHARACTERISTIC CURVES (CZRFR52C2 Thru CZRFR52C39)

Fig.1 TEMPERATURE COEFFICIENTS

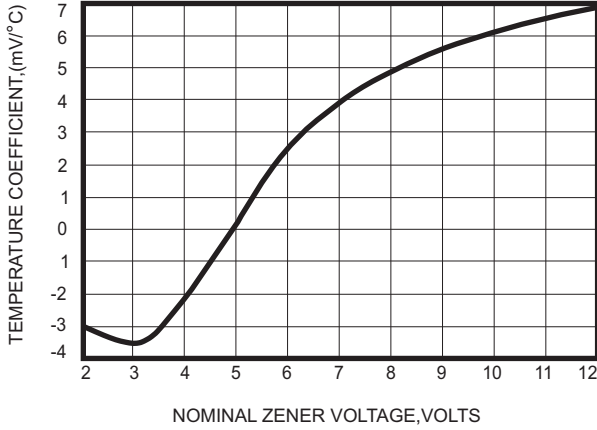


Fig.2 TEMPERATURE COEFFICIENTS

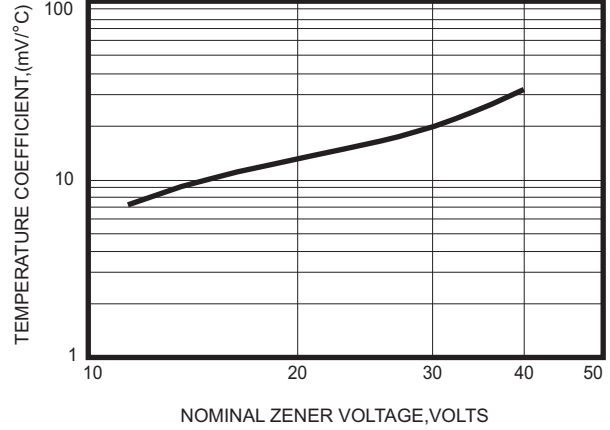


Fig.3 EFFECT OF ZENER VOLTAGE ON ZENER IMPEDANCE

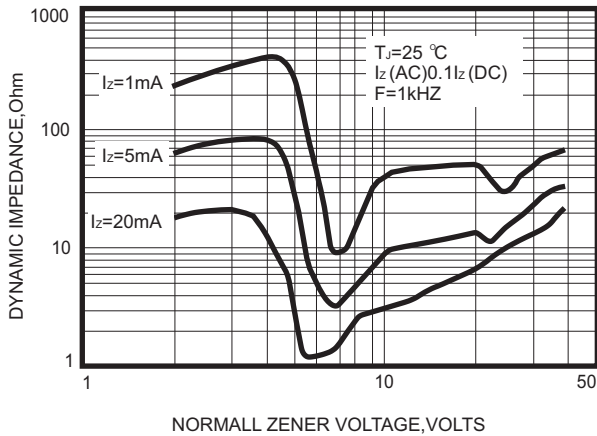


Fig.4 TYPICAL FORWARD VOLTAGE

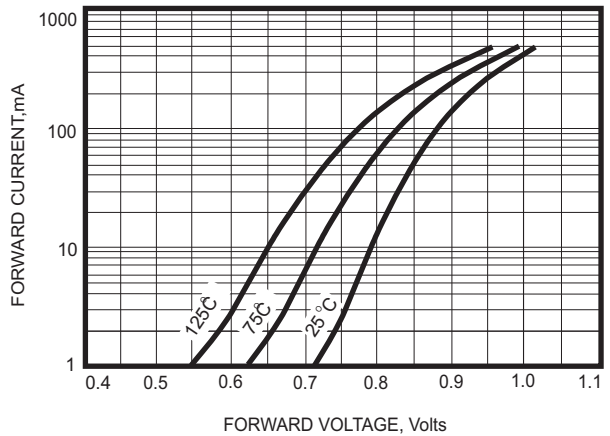


Fig.5 TYPICAL LEAKAGE CURRENT


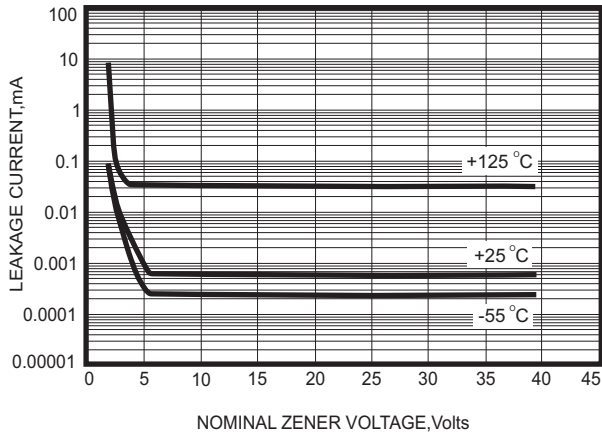


Fig.6 TYPICAL CAPACITANCE

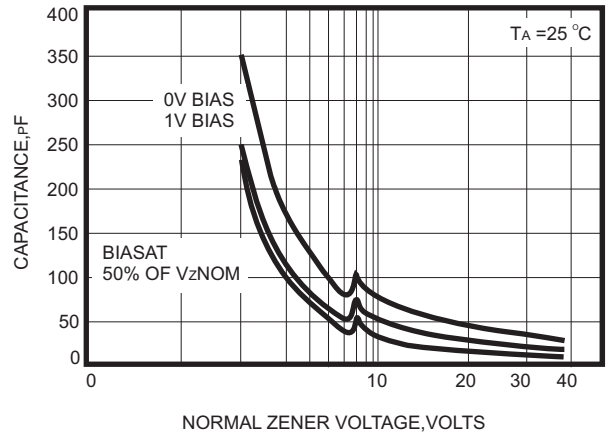

RATING AND CHARACTERISTIC CURVES (CZRFR52C2 Thru CZRFR52C39)

Fig.7 ZENER VOLTAGE VERSUS ZENER CURRENT

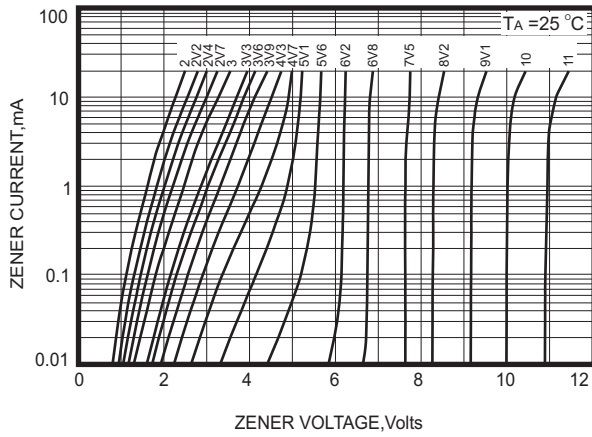


Fig.8 ZENER VOLTAGE VERSUS ZENER CURRENT



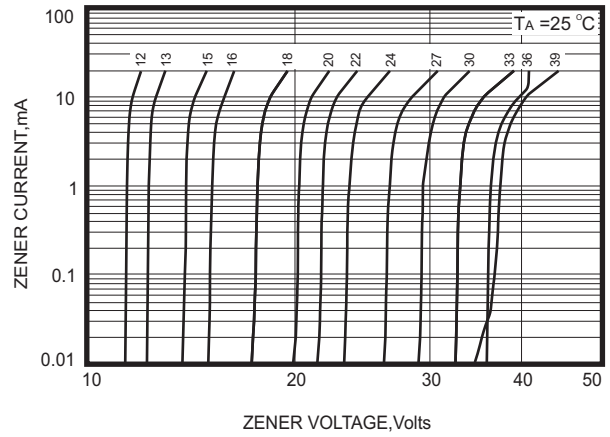


Fig.9 STEADY STATE POWER DERATING

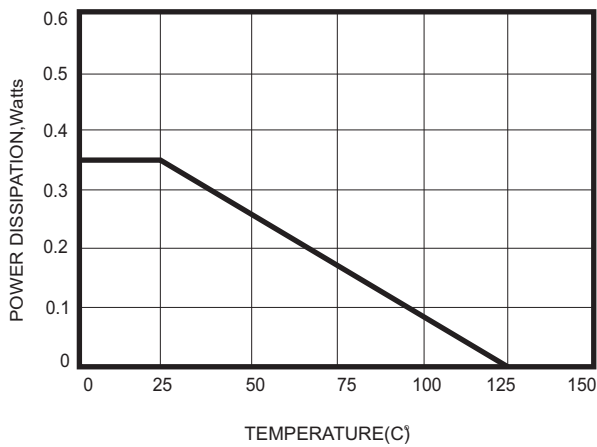

Reel Taping Specification

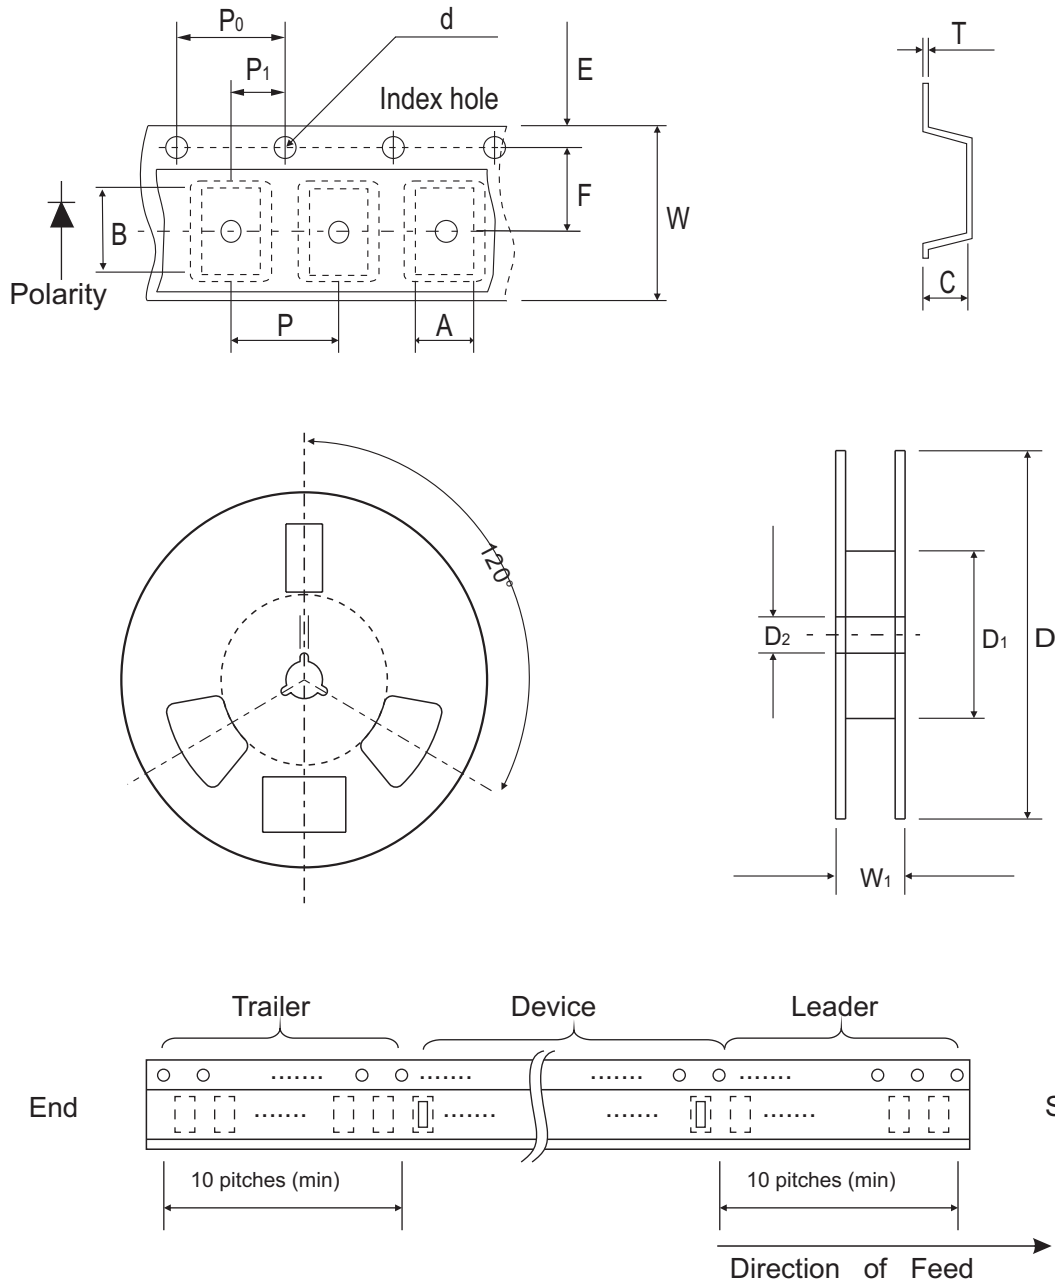


1005 (SOD-323F)	SYMBOL	A	B	C	d	D	D ₁	D ₂
	(mm)	1.55 ± 0.10	2.65 ± 0.10	1.05 ± 0.10	1.55 ± 0.05	178 ± 1	60.0 MIN.	13.0 ± 0.20
	(inch)	0.061 ± 0.004	0.104 ± 0.004	0.041 ± 0.004	0.061 ± 0.002	7.008 ± 0.04	2.362 MIN.	0.512 ± 0.008

1005 (SOD-323F)	SYMBOL	E	F	P	P ₀	P ₁	T	W	W ₁
	(mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	0.23 ± 0.05	8.00 ± 0.20	13.5 MAX.
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	0.009 ± 0.002	0.315 ± 0.008	0.531 MAX.

Suggested PAD Layout

SIZE	1005/SOD-323F	
	(mm)	(inch)
A	2.00	0.079
B	0.70	0.028
C	1.30	0.051
D	2.70	0.106
E	1.30	0.051

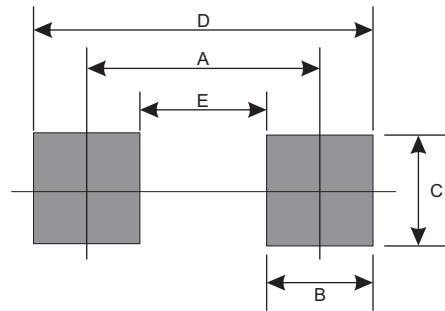

Standard Packaging

Case Type	Qty per Reel	Reel Size
	(Pcs)	(inch)
1005/SOD-323F	4000	7