



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# SMD Zener Diode




SMD Diodes Specialist

## CZRSC55C2V0-G Thru CZRSC55C36-G

Voltage: 2.0 to 36 Volts

Power: 0.5 Watts

RoHS Device




### Features

- This diode is also available in other case styles including the 1206 case with the type designation.
- Silicon Planar Power Zener Diode.

### Mechanical data

- Case: 0805
- Weight: approx. 6mg
- Marking: Cathode band.

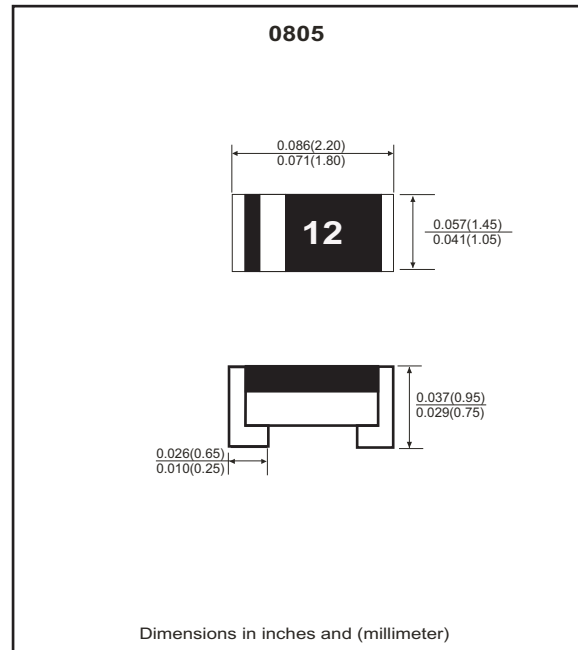

### Maximum Rating and Thermal Characteristics (Tamb = 25°C )

Parameter	Symbol	Value	Unit
Power Dissipation	P <sub>tot</sub>	500	mW
Junction Temperature	T <sub>J</sub>	175	°C
Storage Temperature Range	T <sub>STG</sub>	-65 to +175	°C
Thermal Resistance Junction to Ambient Air	R <sub>θJA</sub>	300	°C/W

### Electrical Characteristics

Parameter	Symbol	Max	Unit
Forward voltage I <sub>F</sub> =200mA	V <sub>F</sub>	1.5	V

# SMD Zener Diode



SMD Diodes Specialist

## Electrical Characteristics(Ta = 25°C)

Part Number	Nominal Zener Voltage		Maximum Zener Impedance				Maximum Reverse Leakage Current		Maximum DC Zener Current	Marking Code
	VZ @ IZT		ZZT @ IZT		ZZK @ IZK		IR @ VR		IZM	
	Min V	Max V	(Ω)	(mA)	(Ω)	(mA)	(uA)	(V)	(mA)	
CZRSC55C2V0-G	1.90	2.10	85	5.0	600	1.0	100	4.0	241	2V0
CZRSC55C2V2-G	2.09	2.31	85	5.0	600	1.0	75	5.2	440	2V2
CZRSC55C2V4-G	2.28	2.52	85	5.0	600	1.0	50	6.0	400	2V4
CZRSC55C2V7-G	2.57	2.84	85	5.0	600	1.0	10	6.5	364	2V7
CZRSC55C3V0-G	2.85	3.15	85	5.0	600	1.0	4	7.0	328	3V0
CZRSC55C3V3-G	3.14	3.47	85	5.0	600	1.0	2	8.0	300	3V3
CZRSC55C3V6-G	3.42	3.78	85	5.0	600	1.0	2	8.4	272	3V6
CZRSC55C3V9-G	3.71	4.10	85	5.0	600	1.0	2	9.1	250	3V9
CZRSC55C4V3-G	4.09	4.52	80	5.0	600	1.0	1	9.9	230	4V3
CZRSC55C4V7-G	4.47	4.94	70	5.0	600	1.0	0.5	11.4	200	4V7
CZRSC55C5V1-G	4.85	5.36	50	5.0	550	1.0	0.1	12.2	186	5V1
CZRSC55C5V6-G	5.32	5.88	30	5.0	450	1.0	0.1	13.7	166	5V6
CZRSC55C6V2-G	5.89	6.51	10	5.0	200	1.0	0.1	15.2	150	6V2
CZRSC55C6V8-G	6.46	7.14	8	5.0	150	1.0	0.1	16.7	136	6V8
CZRSC55C7V5-G	7.13	7.88	7	5.0	50	1.0	0.1	18.2	124	7V5
CZRSC55C8V2-G	7.79	8.61	7	5.0	50	1.0	0.1	20.6	110	8V2
CZRSC55C9V1-G	8.65	9.56	10	5.0	50	1.0	0.1	22.8	100	9V1
CZRSC55C10-G	9.50	10.50	15	5.0	70	1.0	0.1	25.1	90	10
CZRSC55C11-G	10.45	11.55	20	5.0	70	1.0	0.1	27.4	82	11
CZRSC55C12-G	11.40	12.60	20	5.0	90	1.0	0.1	29.7	76	12
CZRSC55C13-G	12.35	13.65	26	5.0	110	1.0	0.1	32.7	68	13
CZRSC55C15-G	14.25	15.75	30	5.0	110	1.0	0.1	35.8	62	15
CZRSC55C16-G	15.20	16.80	40	5.0	170	1.0	0.1	38.8	58	16
CZRSC55C18-G	17.10	18.90	50	5.0	170	1.0	0.1	42.6	52	18
CZRSC55C20-G	19.00	21.00	55	5.0	220	1.0	0.1	47.1	48	20
CZRSC55C22-G	20.90	23.10	55	5.0	220	1.0	0.1	51.7	44	22
CZRSC55C24-G	22.80	25.20	80	5.0	220	1.0	0.1	56.0	40	24
CZRSC55C27-G	25.65	28.35	80	5.0	220	1.0	0.1	62.2	36	27
CZRSC55C30-G	28.50	31.50	80	5.0	220	1.0	0.1	69.2	32	30
CZRSC55C33-G	31.35	34.65	80	5.0	220	1.0	0.1	76.0	30	33
CZRSC55C36-G	34.20	37.80	80	5.0	220	1.0	0.1	83.6	13	36

## RATING AND CHARACTERISTIC CURVES (CZRSC552V0-G Thru CZRSC55C36-G)

Fig.1 Typical thermal resistance v.s. lead length

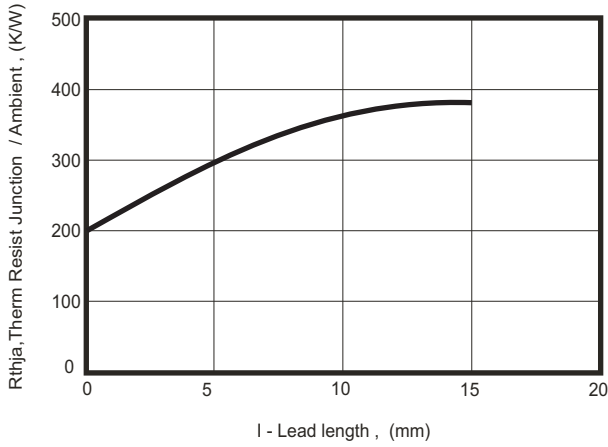


Fig.2 Total Power Dissipation vs. Ambient Temperature

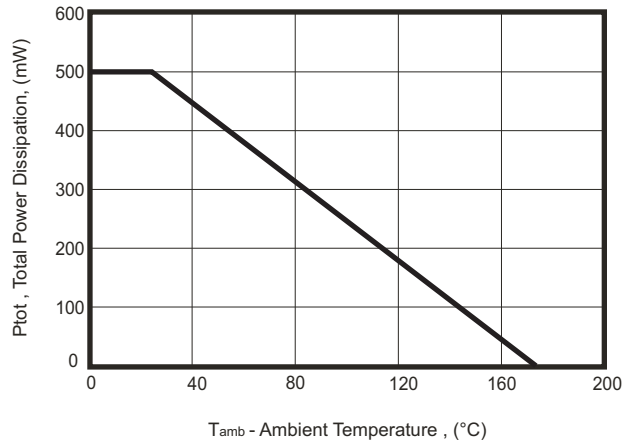


Fig.3 Typical Change of Working Voltage Under Operating Conditions at Tamb=25°C

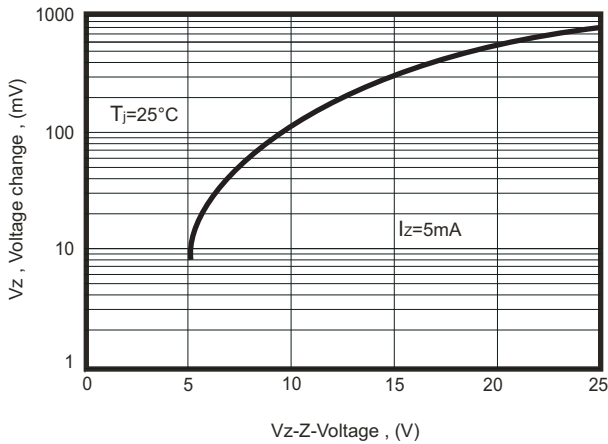


Fig.4 Maximum surge power

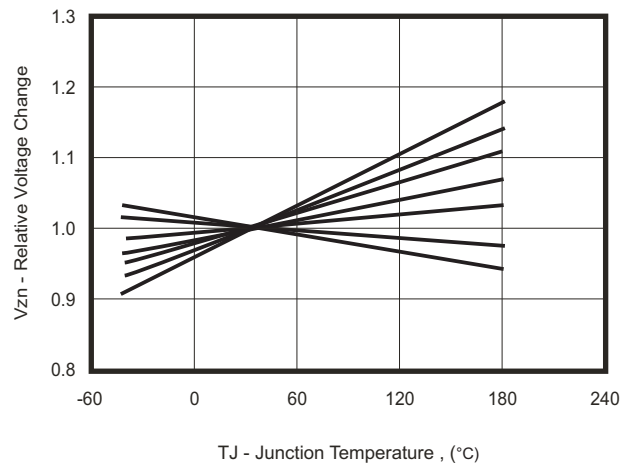


Fig.5- Temperature Coefficient of Vz vs Z-Voltage


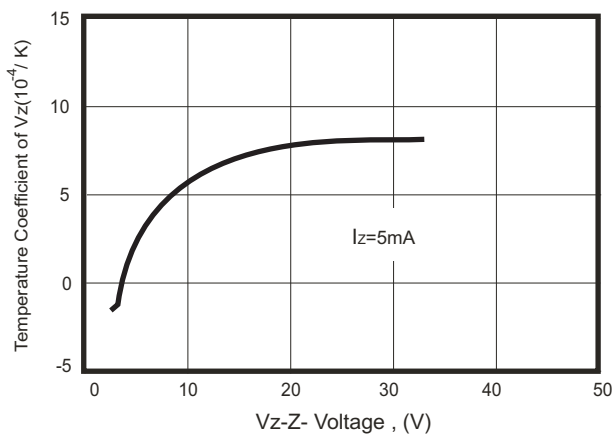


Fig.6-Diode Capacitance vs. Z-Voltage

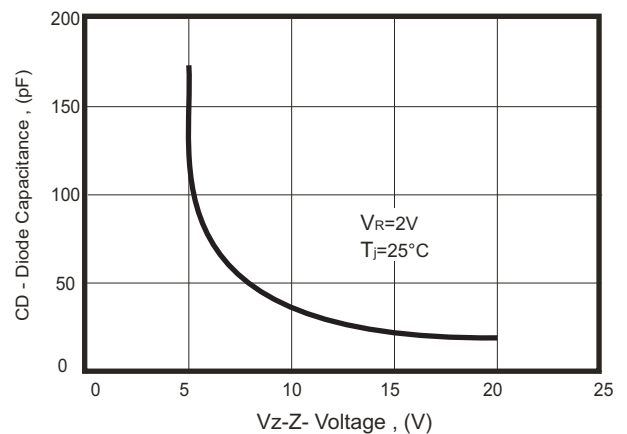

## RATING AND CHARACTERISTIC CURVES (CZRSC552V0-G Thru CZRSC55C36-G)

Fig.7- Forward Current Forward Voltage

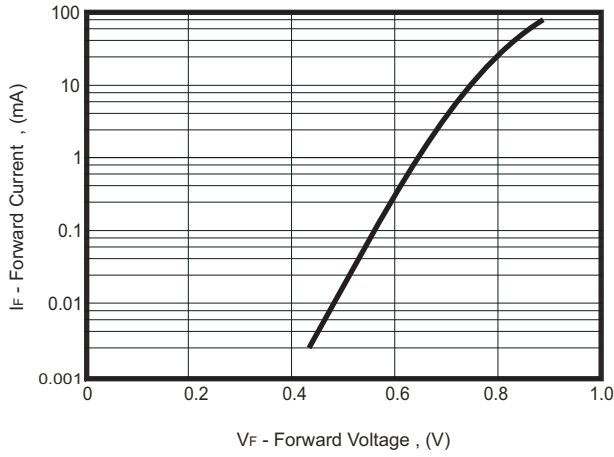


Fig.4- Z-Current vs. Z-Voltage

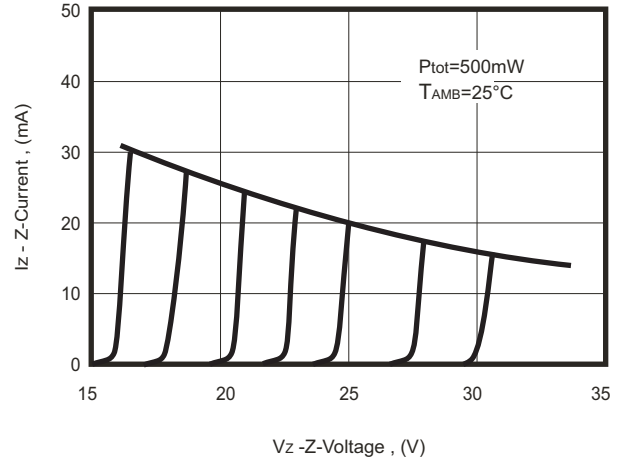


Fig.8- Z-Current vs. Z-Voltage

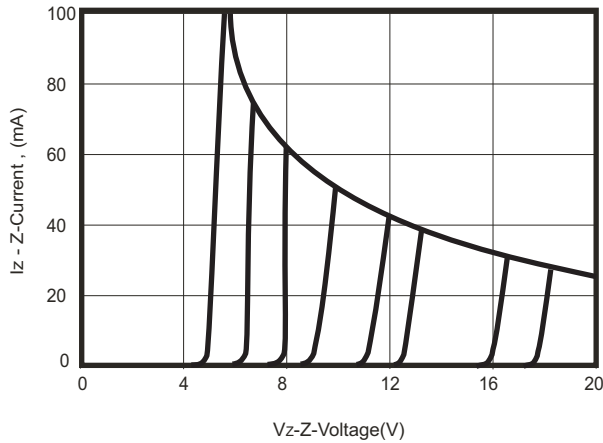


Fig.10- Differential Z-Resistance vs. Z-Voltage



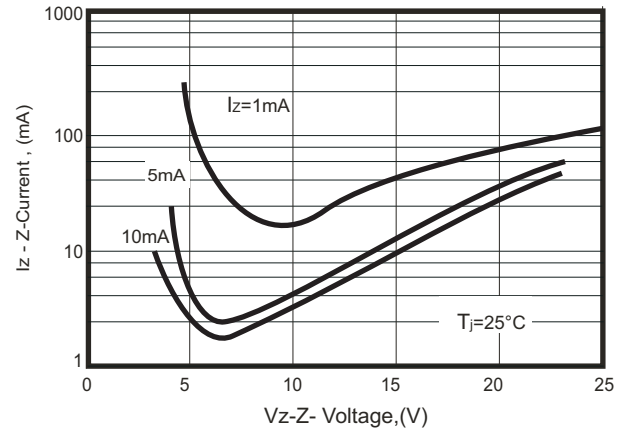


Fig.10- Thermal Response

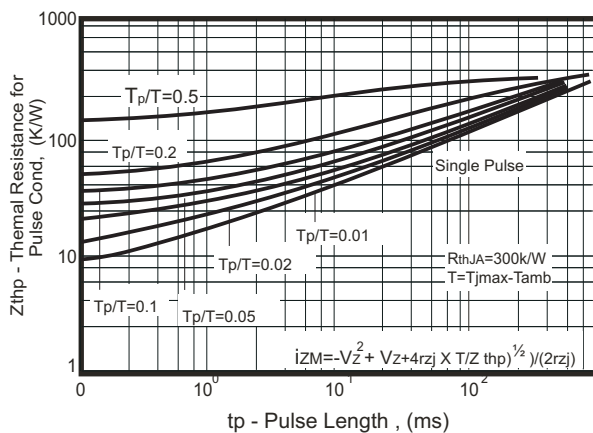

## Reel Taping Specification

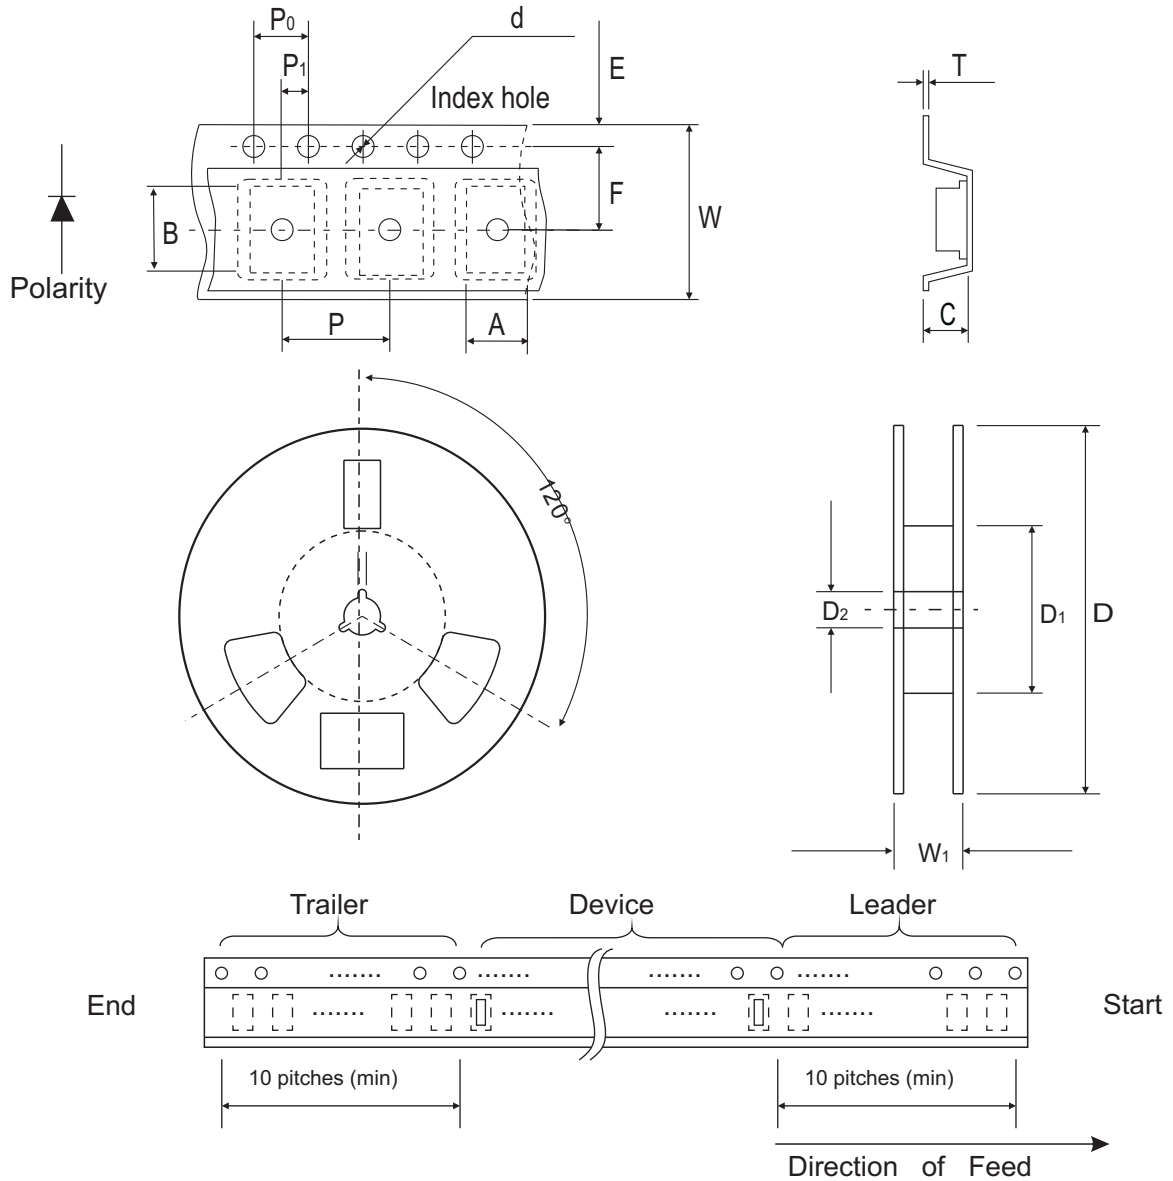


0805	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	1.65 ± 0.20	2.40 ± 0.20	0.95 ± 0.05	1.50 ± 0.10	178.0 ± 1.00	60.0 ± 1.00	13.0 ± 0.30
	(inch)	0.065 ± 0.008	0.094 ± 0.008	0.037 ± 0.002	0.059 ± 0.004	7.007 ± 0.040	2.362 ± 0.040	0.512 ± 0.012

0805	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	8.00 ± 0.20	9.50 ± 0.30
	(inch)	0.689 ± 0.004	0.138 ± 0.004	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.315 ± 0.008	0.374 ± 0.012

## Suggested PAD Layout

SIZE	0805	
	(mm)	(inch)
A	2.20	0.087
B	1.10	0.043
C	1.30	0.051
D	3.30	0.130
E	1.10	0.043

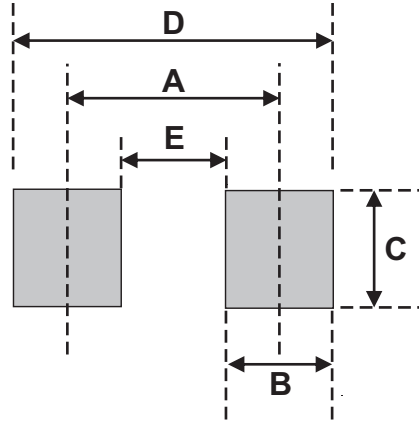

## Standard Package

Case Type	Qty per Reel	Reel Size
	(Pcs)	(inch)
0805	5000	7