



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SPECIFICATION CONTROL DRAWING

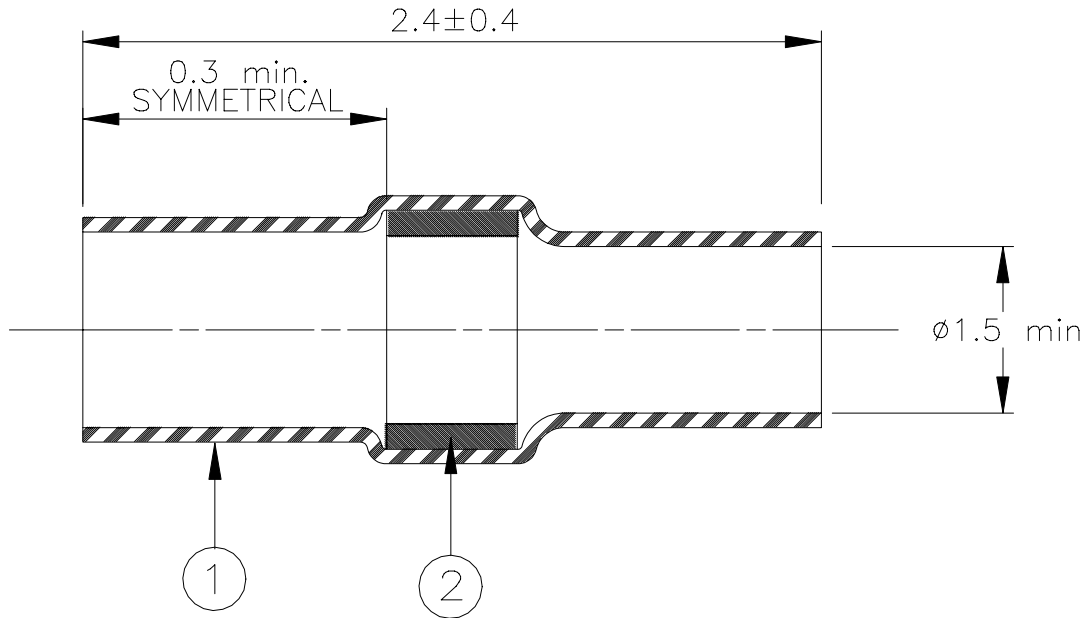

MATERIALS

1. INSULATION SLEEVE: HEAT-SHRINKABLE, RADIATION CROSS-LINKED POLYVINYLIDENE FLUORIDE. TRANSPARENT BLUE. MAXIMUM RECOVERED ID: 0.8.
2. SOLDER PREFORM WITH FLUX:
 - Solder: Sn96 Ag4 per ANSI J-STD-006.
 - Flux: ROM1 per ANSI-J-STD-004.

NOTES

- A. The parts covered by this SCD are for use in interconnecting two components having a maximum combined OD of 1.3.
 - B. Parts will meet the requirements of Raychem Specification RT-1404 when installed properly.
 - C. The termination shall meet the voltage drop and tensile strength requirements of that specification after heat aging at 200°C for 144 hours.
- TEMPERATURE RATING: -55°C to +150°C.

Raychem		THERMOFIT DEVICES	Raychem Corporation 300 Constitution Drive Menlo Park, CA 94025 USA	TITLE: SOLDERSLEEVE* DEVICE			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS.				DOCUMENT NO.: D-110-0215			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D980621		REPLACES: D1100215	
	ROUGHNESS IN MICRON			DOC ISSUE: 3	SCALE: None	SIZE: A	SHEET: 1 of 1
DRAWN BY: M. FORONDA		DATE: 04/27/98	PROD. REV. B				

If this document is printed it becomes uncontrolled. Check for the latest revision.