



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# CUSTOMER DRAWING

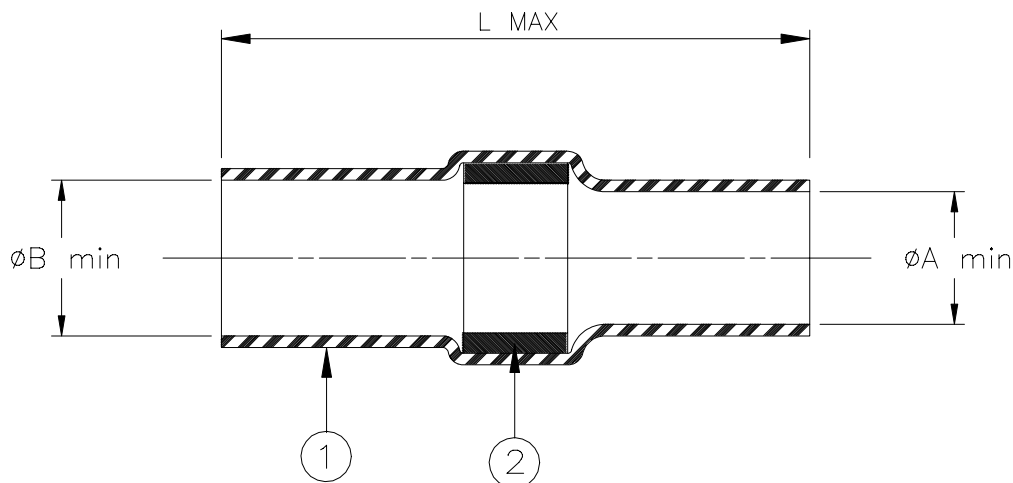


Product Name	Product Dimensions		
	L MAX	A min	B min
D-110-41	27.6 (1.090)	2.7 (0.105)	3.2 (0.125)

## **MATERIALS**

1. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked polyvinylidene fluoride, transparent blue.
2. SOLDER PREFORM WITH FLUX:  
 Solder: Sn63 Pb37 per ANSI J-STD-006.  
 Flux: ROL1 per ANSI-J-STD-004.

## **NOTES**

- A. The parts covered by this drawing are for use in splicing tin or silver-plated solid conductors having a combined diameter between 1.27 (.050) and 2.54 (1.00) when twisted together.
- B. Parts will meet the requirements of Raychem Specification RT-1404 when installed properly.  
 TEMPERATURE RATING: -55C to +150C.

 <b>Tyco Electronics</b>		Tyco Electronics 300 Constitution Dr Menlo Park, CA 94025, U.S.A.		TITLE: <p style="text-align: center;">SOLDERSLEEVE DEVICE</p>	
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]		Raychem Devices		DOCUMENT NO.: <p style="text-align: center;">D-110-41</p>	
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV: <p style="text-align: center;">A</p>	DATE: <p style="text-align: center;">26-Mar-08</p>
DRAWN BY: <p style="text-align: center;">PTALLY</p>	CAGE CODE: <p style="text-align: center;">06090</p>	REPLACES: <p style="text-align: center;">D980623</p>	ECO NUMBER: <p style="text-align: center;">08-007722</p>	SCALE: <p style="text-align: center;">NTS</p>	SIZE: <p style="text-align: center;">A</p> SHEET: <p style="text-align: center;">1 of 1</p>

© 2008 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.