

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







SPECIFICATION CONTROL DRAWING

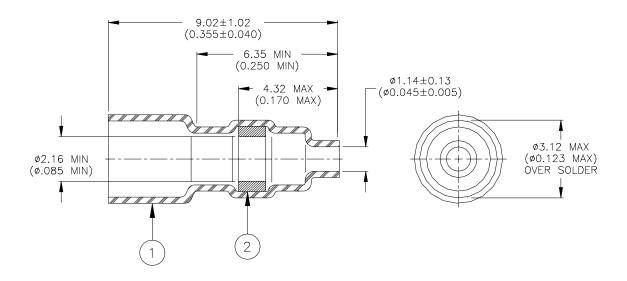

MATERIALS

1. INSULATION SLEEVE: Heat shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.

Recovered I.D.: 1.27 (0.050) max.

2. SOLDER PREFORM WITH FLUX:

SOLDER: TYPE Sn63 per ANSI J-STD-006. FLUX: TYPE ROL1 per ANSI J-STD-004.

APPLICATION

- 1. This part is designed to attach a 24, 22, or 20 AWG conductor to a lead of an electrical component.
- 2. Sleeve may be installed using any heat source capable of raising the temperature of the substrates to be soldered to the soldering temperature without severely discoloring the insulation sleeve.
- 3. Wire and lead shall be inside the solder preform. Heat shall be applied until the solder melts and flows axially forming a fillet between the wire and the lead.

	n Intere t ygo ELECTR Constitution D trk, CA 9402	ect _{TH}	ERMOFIT DEVICES	TIT	SOLDERSLEEVE DISCRETE WIRE TERMINATOR				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.						DOCUMENT NO.: D-141-0228			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON		Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.			DCR NUMBER: D000397		REPLACES: N/A	
DRAWN BY: M. FORONDA		DATE:	: 17-July-00	PROD. REV. A		DOC ISSUE:	SCALE: None	SIZE:	SHEET: 1 of 1