

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







SPECIFICATION CONTROL DRAWING

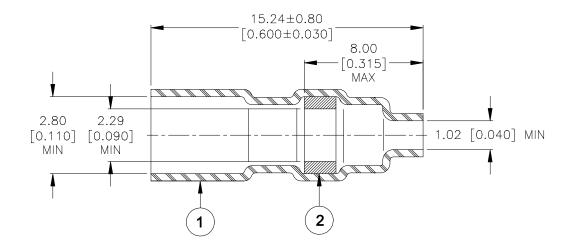

MATERIALS

- 1. INSULATION SLEEVE: Heat shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- 2. SOLDER PREFORM WITH FLUX:

SOLDER: TYPE Sn63 per ANSI/J-STD-006. FLUX: TYPE ROL1 per ANSI/J-STD-004.

APPLICATION

- 1. This sleeve is designed to connect a 20 AWG pre-tinned conductor to a pre-tinned 0.51 [0.020] diameter pins.
- 2. Sleeve will recover to 1.27 [0.050] max. I.D.
- 3. Part may be installed with a convection heat source such as Tyco Electronics/Raychem AA-400 Super Heater.

| 300 Cons | | 300 Constit | onics Corporation tution Drive, c, CA. 94025, U.S.A. | Raychem | TITLE: 20 AWG LE | SOLDERSI AD TO 0.05 | , | DIA. PIN | |
|---|------------------|------------------|--|--|-------------------|------------------------|-------|------------------|--|
| Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets] | | | | | D-141-51 | | | | |
| TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A | ROUGHNESS IN eva | | this drawing at any time | co Electronics reserves the right to amend s drawing at any time. Users should aluate the suitability of the product for their plication. | | DOC. ISSUE: | | DATE: 14-Jul-03 | |
| DRAWN BY: M. FOROND | A | CAGE CODE: 06090 | REPLACES: N/A | DCR NUMBER: D030390 | PROD. REV.: D | SCALE: None | SIZE: | SHEET: 1 of 1 | |