



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




TE CONNECTIVITY (TE) RESERVES THE RIGHT TO CHANGE THIS DRAWING AT ANYTIME. USERS SHOULD EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.

REVISION

LTR	DESCRIPTION	DATE	APPROVED
A	REVISED PER ECO-15-013263	09/09/2015	N. PRZYBYLSKA

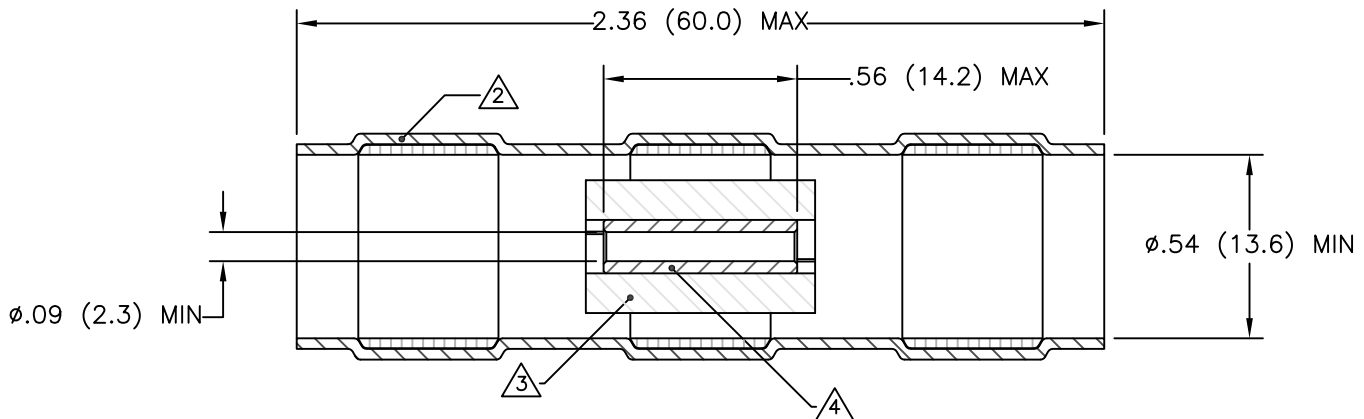

MATCHED IMPEDANCE SPLICE FOR RG393 COAXIAL CABLE REPAIR

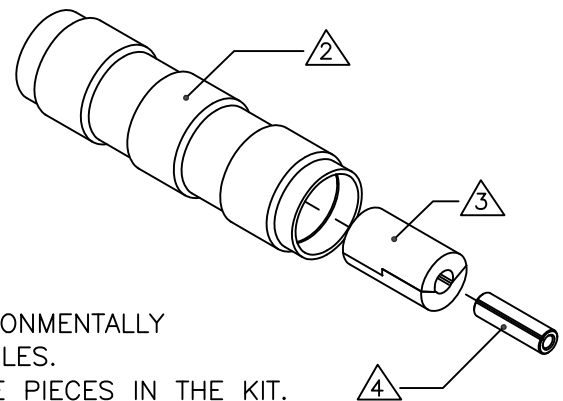

NOTES:

- THIS PRODUCT IS DESIGNED FOR USE IN MAKING ENVIRONMENTALLY PROTECTED PERMANENT JOINTS ON RG393 COAXIAL CABLES. COMPONENTS **2**, **3**, **4**, WILL BE SUPPLIED AS LOOSE PIECES IN THE KIT.

2 SOLDERSLEEVE MATERIALS:

INSULATION SLEEVE: HEAT-SHRINKABLE, TRANSPARENT BLUE, RADIATION CROSS-LINK MODIFIED POLYVINYLIDENE FLUORIDE.

MELTABLE RINGS: THERMALLY STABILIZED THERMOPLASTIC – COLOR: BLUE.

SOLDER: TYPE Sn63 PER ANSI-J-STD-006.

3 DIELECTRIC INSERT MATERIAL: FLUORINATED ETHYLENE PROPYLENE.

4 CRIMP BARREL MATERIAL: ANNEALED COPPER PER ASTM B-152. FINISHES: TIN PLATED PER MIL-T-10727.

- INSTALLATION REQUIREMENTS TOOL: CV1981 HEAT GUN WITH PR13C REFLECTOR.
- FOR INSTALLATION PROCEDURE AND APPLICATION EQUIPMENT, REFER TO RPIP-1108.
- FOR PERFORMANCE AND TEST SPECIFICATIONS, REFER TO SPECIFICATION D-6204.
- FOR ADDITIONAL ORDERING INFORMATION, CONTACT TE TECHNICAL SUPPORT.

If this document is printed it becomes uncontrolled. Check for the latest revision

©2015 TE CONNECTIVITY LTD. FAMILY OF COMPANIES. ALL RIGHTS RESERVED
 TE CONNECTIVITY AND TE CONNECTIVITY (LOGO) ARE TRADEMARKS.
 OTHER LOGOS PRODUCT AND/OR COMPANY NAMES MAY BE TRADEMARKS OF THEIR RESPECTIVE OWNERS.

Raychem Devices
 CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. REFERENCE METRIC DIMENSIONS ARE IN BRACKETS [metric].	DRAWN: T. NGUYEN	DATE: 03/23/2015		TE Connectivity		
	CHECKED: N. PRZYBYLSKA	DATE: 03/25/2015				
DECIMALS TOLERANCES: XXX ± .005 [0.13mm] XX ± .01 [0.25mm] X ± .1 [0.50mm]	APPROVED: N. PRZYBYLSKA	DATE: 04/10/2015	TITLE: D-150-Z393 – SOLDERSLEEVE			
	MATERIAL: SEE NOTES	FINISH: SEE NOTES				
ANGLES TOLERANCE: ± 1°			SIZE: A	SHEET: 1 OF 1	CAGE CODE: 06090	DRAWING NO: D-150-Z393
SCALE: DO NOT SCALE THIS DRAWING	CAD FILE: D-150-Z393.dwg	THIRD ANGLE PROJECTION:				REV. A