



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## CUSTOMER DRAWING

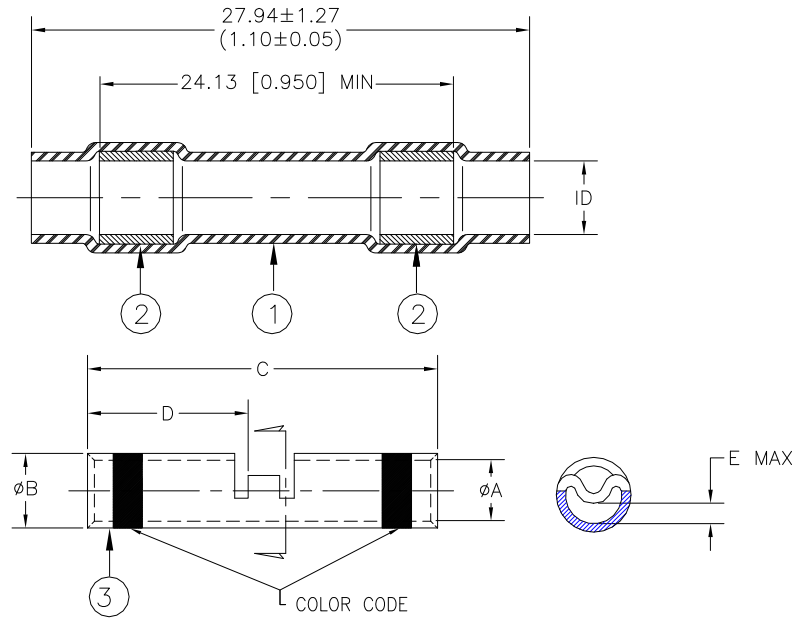

\* I.D: a- As received; b- After unrestricted recovery thru meltable insert.

Product Name	Prod. Rev:	I.D.* a min b max	Crimp Splicer					Color Code
			φA	φB	C	D	E max	
D-200-82	A	<u>2.16 (0.085)</u> 0.64 (0.025)	<u>1.27 (0.050)</u> 1.14 (0.045)	<u>2.03 (0.080)</u> 1.91 (0.075)	<u>12.95 (0.510)</u> 12.45 (0.490)	<u>6.22 (0.245)</u> 5.72 (0.225)	0.38 (0.015)	Red
D-200-83	A	<u>2.79 (0.110)</u> 0.64 (0.025)	<u>1.75 (0.069)</u> 1.63 (0.064)	<u>2.70 (0.106)</u> 2.57 (0.101)	<u>14.86 (0.585)</u> 14.35 (0.565)	<u>7.11 (0.280)</u> 6.60 (0.260)	0.51 (0.020)	Blue
D-200-84	A	<u>4.32 (0.170)</u> 0.64 (0.025)	<u>2.60 (0.102)</u> 2.46 (0.097)	<u>3.89 (0.153)</u> 3.73 (0.147)	<u>14.86 (0.585)</u> 14.35 (0.565)	<u>7.11 (0.280)</u> 6.60 (0.260)	1.27 (0.050)	Yellow

Product Name	MIL Spec Equivalent Size	Wire Range	Wgt. Lbs/Mpc max
D-200-82	M81824/1-1	26-20	1.02
D-200-83	M81824/1-2	20-16	1.61
D-200-84	M81824/1-3	16-12	2.72

### MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified fluoropolymer.
- MELTABLE RINGS: Environment resistant modified thermoplastic fluoroelastomer. Color: light blue.
- CRIMP SPLICER: Base Metal: Copper Alloy 101 or 102 per ASTM B75.  
Plating: Nickel per SAE AMS-QQ-N-290.  
Color Code: See table.

		<i>Raychem Devices</i>	TITLE: IN-LINE SPLICE SEALING SYSTEM, 1 TO 1 NICKEL PLATED CRIMP, 200deg.C			
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]			DOCUMENT NO: <b>D-200-82/-83/-84</b>			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	REVISION: A1	DATE: December 07, 2012		
PREPARED BY: TNGUYEN	ECO NUMBER: ECO-12-021508	CAGE CODE : 06090	SCALE: N/A	SIZE: A	SHEET: 1 of 2	

© 2012 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.

# CUSTOMER DRAWING

## APPLICATION

1. These parts are designed to provide an immersion resistant in-line splices of 1 to 1 wires falling within the size range listed, and having nickel-plated conductors and insulations rated for at least 135°C.
2. Parts will meet all performance requirements of SAE AS-81824 when installed as outlined below with the following modifications:
  - Heat ageing test temperature of 200°C.
  - Thermal shock maximum temperature of 200°C.
3. Acceptance sampling shall be in accordance with Paragraph 4.6.1 of SAE AS-81824.
4. Packing and packaging shall be in accordance with Section 5, Level C, of SAE AS-81824.
5. This document takes precedence over documents referenced herein.

## ASSEMBLY PROCEDURE:

1. Slide sealing sleeve onto one of the wires to be spliced.
2. Strip wires 7.95 [5/16"] to 8.73 [11/32"].
3. Insert one wire into barrel of crimp splicer and crimp using a Raychem AD-1377 crimp tool.  
Repeat for the other wire.
4. Center sealing sleeve over the splice.
5. Apply heat, using an approved heat source, first to one of the inserts and then the other. Heat should be applied until insert melts and flows axially along the wire.

Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]

DOCUMENT NO.: <b>D-200-82/-83/-84</b>	ECO NUMBER: ECO-12-021508	PROD. REV.: SEE TABLE	DATE: December 07, 2012	SHEET: 2 of 2
--	------------------------------	--------------------------	----------------------------	------------------

© 2012 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.