



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SPECIFICATION CONTROL DRAWING

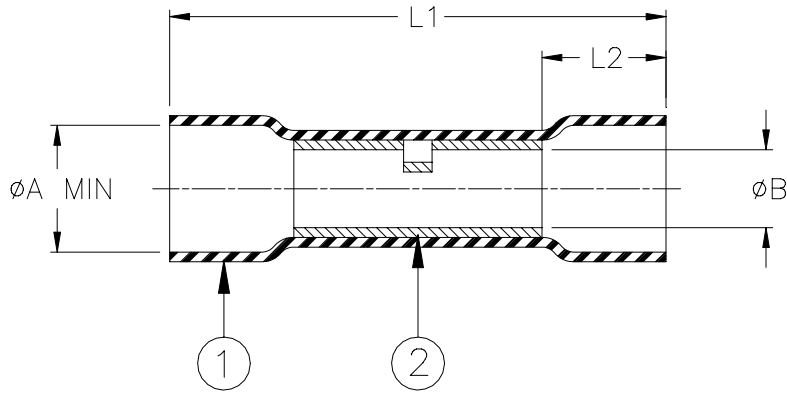

Product Revision		Color	Marking	Size Range mm ² (AWG)	L1 ±1.5 (L1 ±0.06)	L2 min	øA*		øB min	Wire Strip Length Nom.
Product Name							(a)	(b)		
D-406-5001	B	Red	22 - 18 AWG	0.5 - 1.0 (22 - 18)	37.0 (1.50)	10.0 (0.39)	4.3 (0.170)	1.4 (0.055)	1.47 (0.058)	6 to 10 (1/4 to 3/8)
D-406-5002	B	Blue	16 - 14 AWG	1.5 - 2.5 (16 - 14)	37.0 (1.50)	10.0 (0.39)	5.0 (0.197)	2.0 (0.080)	2.33 (0.092)	6 to 10 (1/4 to 3/8)
D-406-5003	B	Yellow	12 - 10 AWG	3.0 - 6.0 (12 - 10)	43.0 (1.70)	10.0 (0.39)	6.5 (0.255)	2.8 (0.110)	3.50 (0.138)	10 to 13 (3/8 to 1/2)

MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked polyamide (nylon) with a polyamide-based hot-melt adhesive liner. Color per table.
- CRIMP SPLICE: Tin-plated copper alloy.
BASE METAL: C110 Copper.
PLATING: Tin-plated per MIL-T-10727, Type 1.

APPLICATION

- These parts may be used to obtain an environment-resistant one-to-one in-line (butt) splice in wires meeting the size range and diameter restraints specified herein and having a temperature rating of not less than 85°C.
- øA* (a) Minimum diameter as received: Wire insulation diameter must be less than this value.
(b) Maximum diameter after recovery: Wire insulation diameter must be larger than this value to obtain an environment resistant splice.
- Wires are to be stripped per table, inserted into opposite ends of the crimp barrel, crimped with a Tyco Electronics/Raychem AD-1522 tool (or equivalent). The sleeve must be heated along its whole length until the crimp marks are gone and the ends of the sleeve recover onto the wires.
- Spliced assemblies will meet the requirements of Tyco Electronics/Raychem Specification RB-107.
- The parts covered by this drawing are UL (US and CANADA) Listed, File #E87681.

tyco <i>Electronics</i>		Raychem 305 Constitution Drive, Menlo Park, CA. 94025, USA		TITLE: DURASEAL CRIMP SPLICE, ENVIRONMENT RESISTANT							
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]				DOCUMENT NO.: D-406-500X							
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A ROUGHNESS IN MICRON		Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		PROD. REV.: SEE TABLE		DOC. ISSUE: 1		DATE: 26-Mar-03	
PREPARED BY: mforonda		DCR NUMBER: D030206		REPLACES: D982024		SCALE: None		SIZE: A		SHEET: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision.