



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SPECIFICATION CONTROL DRAWING

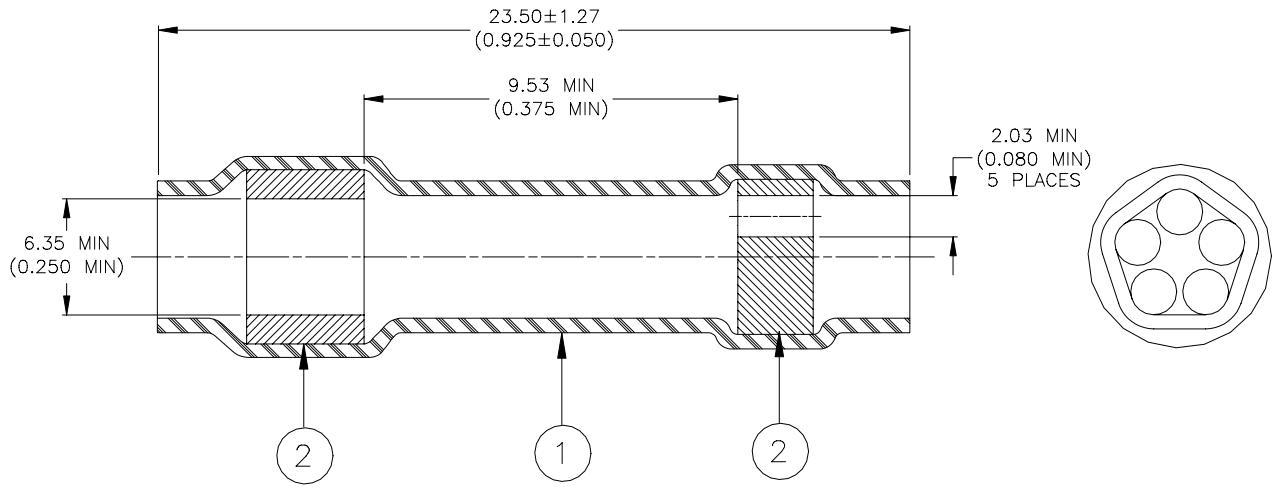

MATERIALS

1. **INSULATION SLEEVE:** Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.

Recovered Dimensions: I.D.: 3.18 max (0.125 max)

Wall Thickness: 0.33 min. (0.013 min)

2. **SEALING INSERTS:** Fluorocarbon-based thermoplastic, Color: natural.

APPLICATION

1. This part is designed to provide an environment resistant seal on stub or parallel splices, having no more than two wires, rated for at least 135°C, exiting from any one hole.
2. To install parts, insert wires through multi-holed insert and make crimp in usual manner. Reposition sleeve so that crimp barrel is between the two inserts. Hold sleeve in this position by squeezing the wires behind the multi-hole insert. Heat sleeve using a Raychem approved convection heater. Apply heat first to multi-hole insert end of sleeve until the insert melts and flows, then heat other insert until it flows.
3. Maximum weight of part: 0.52 grams.

Raychem Interconnect <small>a division of Tyco Electronics</small> 300 Constitution Drive Menlo Park, CA 94025, USA		THERMOFIT DEVICES		TITLE : SEALING SLEEVE, STUB SPLICE			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO.: D-436-46			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D000568		REPLACES: N/A	
DRAWN BY: M. FORONDA	DATE: 02-Oct-00	PROD. REV. K	DOC ISSUE: 1	SCALE: None	SIZE: A	SHEET: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision.