

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







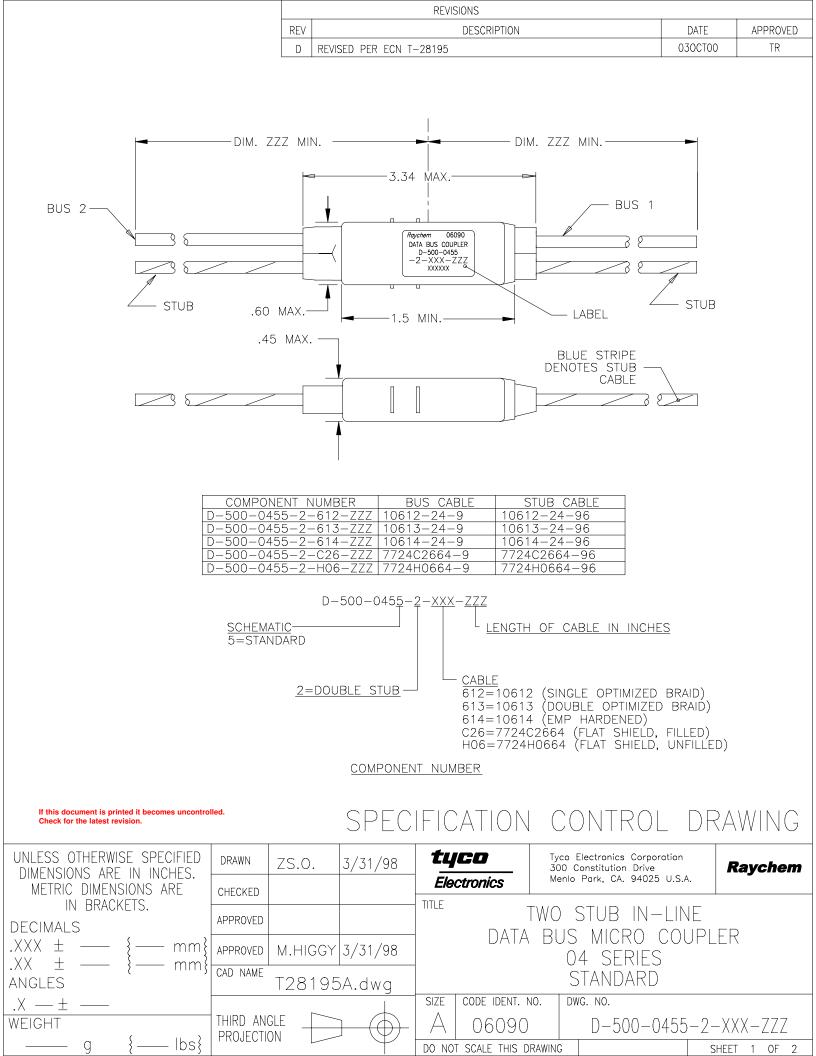


1. MATERIAL AND FINISHES:

- 1.1 INTERNAL COMPONENTS:
 - -TRANSFORMER TO MIL-T-21038 AND MIL-STD-1553/B
 - -RESISTORS TO PER MIL-R-39007/9, 57.6 OHMS
- 1.2 SHIELDED CASE: ALUMINUM PER ASTM B 618, ALLOY A03560 COND. F. OR ASTM B211, ALLOY A92017.
- 1.3 SEALED STRAIN RELIEF COVER: MODIFIED CROSS—LINKED ELASTOMER, BLACK, TO RAYCHEM SPECIFICATION RK—6713.
- 1.4 CABLE (SEE CABLE TABULATION, SHEET 1).
 TO RAYCHEM SPECIFICATION 1200.
- 2. APPLICATION:
- 2.1 THIS COUPLER IS DESIGNED TO BE INSTALLED INTO A DIGITAL MULTIPLEX ASSEMBLY MEETING THE REQUIREMENTS OF MIL-STD-1553B.
- 2.1.1 FOR CABLE SPLICING USE FLEXIBLE SPLICE KIT D-150-9133.
- 2.2 FOR NETWORK LAYOUT ASSISTANCE CONSULT RAYCHEM TECHNICAL SERVICES.
- 2.3 CABLE BEND RADIUS PER MIL-W-5088 STATIC BEND: 5 x CABLE O.D. MIN. DYNAMIC BEND: 10 x CABLE O.D. MIN.
- TEMPERATURE:
- 3.1 OPERATING TEMPERATURE: -65° C TO $+150^{\circ}$ C
- 4. PERFORMANCE SPECIFICATIONS:
- 4.1 TRANSFORMER MEETS THE PERFORMANCE REQUIREMENTS OF MIL-STD-1553B.
- 4.2 COUPLER WILL BE QUALIFIED TO RAYCHEM SPECIFICATION D-6020. QUALIFICATION PENDING.
- 5. WEIGHT:
- 5.1 MAXIMUM WEIGHT WITHOUT CABLE: 15 GRAMS MAX.
- 6. ORDERING INFORMATION:

ORDER PER COMPONENT NUMBER. (SEE SHEET 1) AND DESIRED "ZZZ" CABLE LENGTH. SPLICE KITS TO BE ORDERED SEPARATELY.

SPECIFY CERTIFICATION OF CONFORMANCE REQUIREMENTS AS SEPARATE LINE ITEM.

TWO STUB COUPLER SCHEMATIC

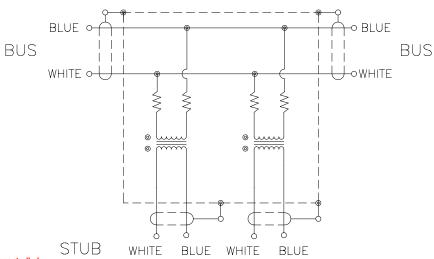

If this document is printed it becomes uncontrolled. Check for the latest revision.

CAD NAME:	T28195B	DRAWN	ZS.0.	3/31/98	SIZE	CODE IDENT. NO.	DWG. NO.	·	REV
					A	06090	D-500-0455-2	VVV 777	
		ISSUED					D-500-0455-Z	-XXX-ZZZ	ן ט
					DO NO	T SCALE THIS DRAWIN	IG	SHEET 2 OF	2