

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







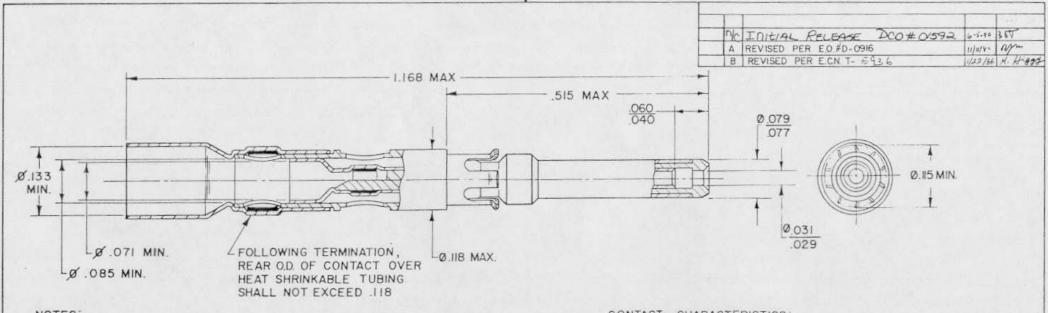

NOTES:

- THIS CONTACT IS DESIGNED FOR USE IN MIL-C-28748 SIZE 16 CAVITIES.
- 2. THIS CONTACT IS DESIGNED TO TERMINATE TO THE CABLES IN TABLE. OTHER APPLICATIONS SHOULD BE SUBMITTED TO RAYCHEM FOR EVALUATION.
- 3. FOR TERMINATION PROCEDURE: SEE ES 61164
- 4. MATING CONTACT (FOR SIMILAR CABLES) D-602-77

RG CABLE NO.	RAYCHEM CABLE NO.
RG - 179 B/U	5026A IXIX
RG - 187/U	5030A IXIX
RG - 316 /U	7528A IXIX
	7530A IXIX
	9532A IXIX

CONTACT CHARACTERISTICS

MATERIALS:

CONTACT MEMBERS

COPPER ALLOY PER QQ-B-626 & QQ-C-530

CONTACT PLATING:

GOLD PER MIL-G-45204, NICKEL PER QQ-N-290

OVER COPPER FLASH.

SPRING MEMBER:

BERYLLIUM COPPER PER QQ-C-533 NICKEL PER QQ-N-290

SPRING PLATING:

DIELECTRIC:

FLUOROPOLYMER.

SOLDER:

SN63 PER QQ-S-571

CABLE SUPPORT TUBING: POLYVINYLIDENE FLUORIDE

PERFORMANCE:

TEMPERATURE RATING: 125°C. MAXIMUM

CURRENT RATING:

3 AMPS

VOLTAGE RATING:

DIELECTRIC WITHSTAND VOLTAGE, 900 VOLTS

RMS, MAXIMUM

IO MILLIOHMS MAXIMUM (INNER) CONTACT RESISTANCE:

8 MILLIOHMS MAXIMUM (OUTER)

INSULATION RESISTANCE: 5.000 MEGOHMS MINIMUM

ENGAGEMENT FORCE, INNER SOCKET: 6.0 OZ. MAXIMUM. SEPARATION FORCE, INNER SOCKET: 0.5 OZ. MINIMUM.

CONNECTOR SPECIFICATION CONTROL DRAWING

DIMENSIONS ARE IN INCHES BRACKETED DIMENSIONS () ARE METRIC AND TOLERANCES ARE. .XXX	DRAWN	DWW	2-15-80		Type Becreeise Corporation 300 Constitutional Brive Electronics Menis Park, CA 94025 USA Reychem				
	CHECKED								
	APPROVED	345	6-5-80		SHIELDED CONTACT, PIN COAXIAL CABLE				
	APPROVED	1.426	6-5-80						
	APPROVED								
				C	CODE IDENT	D-602-76			
						WEIGHT	SHEET	OF	

DO NOT SCALE THIS DRAWING