imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SPECIFICATION CONTROL DRAWING

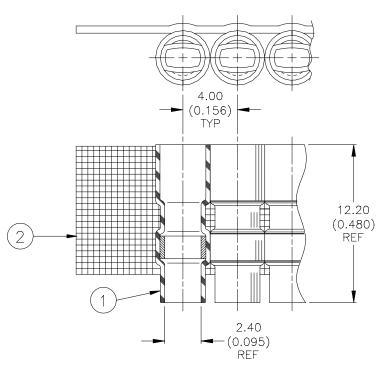


MATERIALS

- 1. SOLDERSLEEVE: D-129-03. Quantity Per Assembly: 500
- 2. CARRIER STRIP: Adhesive Coated High Temperature Tape

APPLICATION

- 1. This assembly is designed for use on PCB connectors having eyelet terminals parallel longitudinally with the face of the connector on 4.00 (0.156) spacing.
- 3. Sleeves are to be installed using Raychem-approved convection or infrared heating tools.
- 4. Strip wires to 5.60±0.50 (0.220±0.020) and pre-tin.
- 5. Trim pre-tinned terminal pins, as required to 6.35 (0.250).

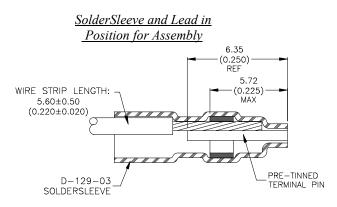

tyco Electronics	Rayche	Tyco Electron 300 Constituti Menlo Park, C		TITLE : SOLDERPAK ASSEMBLY, PCB CONNECTOR 2.16 (0.085)x 0.50 (0.020) x 6.35 (0.250) Terminals on 4.00 (0.156) Center Spacing			
Unless otherwise specified dimensions are in millimeters. Inches dimensions are in between brackets.				DOCUMENT NO.: D-714-00			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	drawing at any time. Users should evaluate JGHNESS IN suitability of the product for their application		DATE: 22-Jun-01		DOC ISSUE: 1	
DRAWN BY: M. FOROND	A CAGE CODE	: REPLACES: N/A	DCR NUMBER: D010416	PROD. REV.: D	SCALE: None	SIZE: A	SHEET: 1 of 1

If this document is printed it becomes uncontrolled. Check with the web for the latest revision.