mail

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Moisture Barrier Bag Dri-Shield® 3700

This foil moisture barrier bag provides superior protection for ESD sensitive and moisture sensitive electronics, typically SMT (Surface Mount Technology) items. Best practice is to use with Desiccant and a Humidity Indicator Card. The bags are heat sealable and suitable for vacuum packaging. Bags are printed with ESD protective and moisture sensitive warning symbols and a lot code for traceability.

SCS Moisture Barrier Bags Dri-Shield[®] 3700 are manufactured from a laminate of polyester, foil, and polyethylene. The metal layer provides discharge shielding and minimizes the penetration of electric fields and electrostatic discharges.

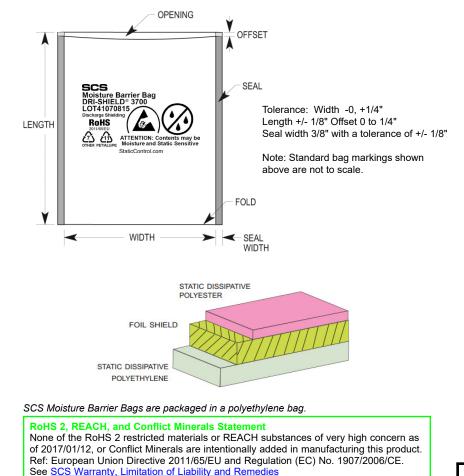



Meets ANSI/ESD S20.20, Packaging standard ANSI/ESD S541, Static Control Bag ANSI/ESD S11.4 Level 1, and IPC/JEDEC J-STD-033.



Physical	Typical Value	Testing Method	
Moisture Vapor Transmission Rate (MVTR)	≤ 0.0003 grams/100 sq. in./24 hrs ≤ 0.002 grams/100 sq. in./24 hrs	ASTM F1249 ASTM F392 condition E and ASTM F2149	
Tensile Strength	9900 PSI, 68 MPa	ASTM D882	
Puncture Resistance	25 lbs, 111 N	MIL-STD-3010C Method 2065	
Seal Strength	15 lbs, 66 N	ASTM D882	
Thickness	4.2 mils, 0.1067 mm +/-10%	MIL-STD-3010 Method 1003	
Marking Adhesion	Pass	IPC-TM-650 2.4.1	
Electrical	Typical Value	Testing Method	
ESD Shielding	<10 nJ	ANSI/ESD STM11.31	
Surface Resistance - Interior	1 x 10 ⁴ to < 1 x 10 ¹¹ ohms	ANSI/ESD STM11.11	
Surface Resistance - Exterior	1 x 10 ⁴ to < 1 x 10 ¹¹ ohms	ANSI/ESD STM11.11	
EMI Attenuation	45 dB	1 to 10 GHz	
Cleanliness	Typical Value	Testing Method	
Silicone	Not Detected	FTIR	
Heat Sealing Conditions	Typical Value		
Temperature	400°F, 204°C		
Time	0.6 – 4.5 seconds		
Pressure	30 – 70 PSI, 206 – 482 KPa		

Bag is free of amines, silicones and heavy metals.

This product is intended for commercial use only. This product is not on the Qualified Product Listing under the Defense Standardization Program.

NOTE: The complete dry package concept of packaging for electronics requires three elements: <u>Moisture Barrier Bags</u> - To Protect <u>Desiccants</u> - To Absorb Moisture Humidity Indicator Cards - To Monitor Performance

Made in the United States of America with Globally Sourced Materials.

Specifications and procedures subject to change without notice.

DRI-SHIELD® 3700 MOISTURE BARRIER BAG

926 JR Industrial Drive, Sanford, NC 27332 WEB SITE: <u>StaticControl.com</u> PHONE (919) 718-0000	DRAWING NUMBER Dri-Schield 3700	DATE April
	DI-Schleid 3700	2017