



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

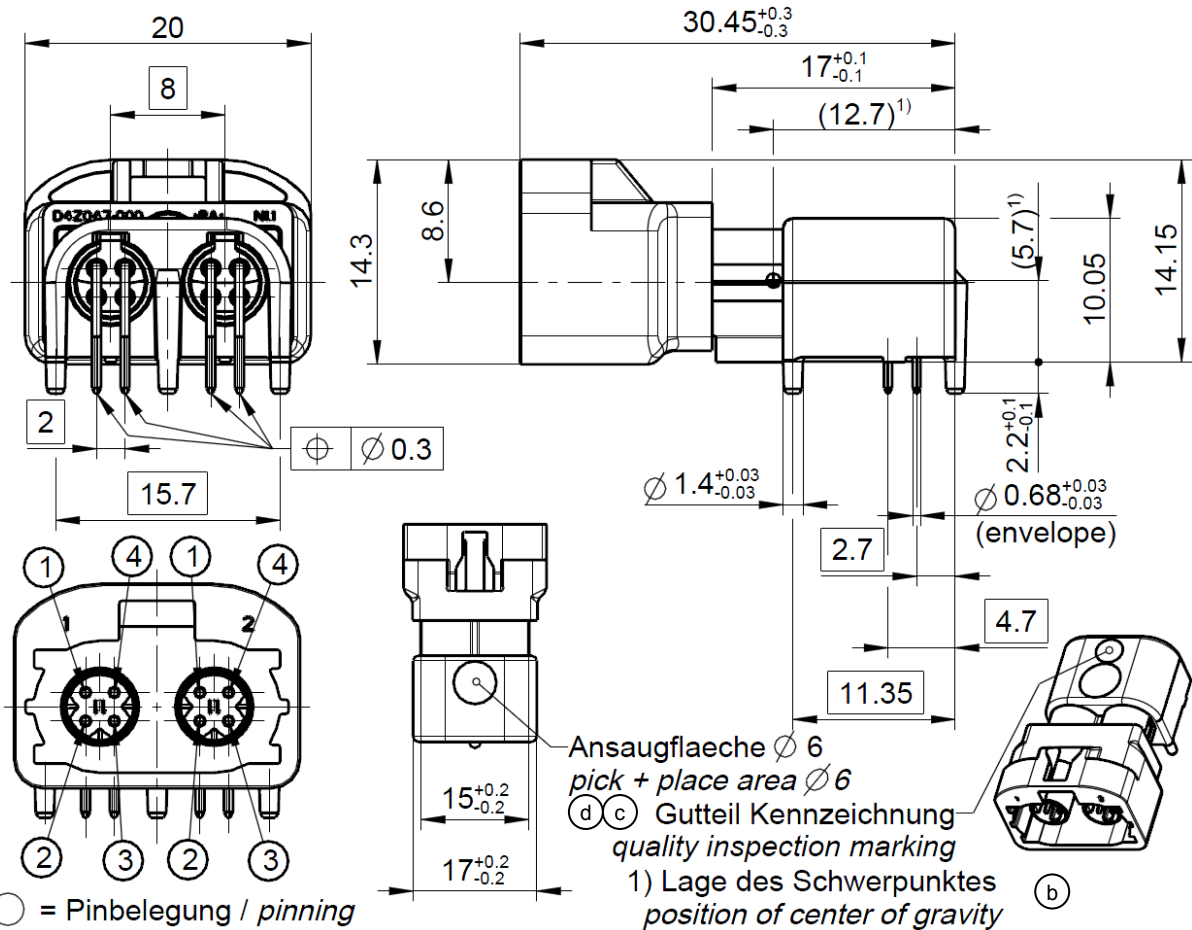
Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



RosenbergerHSD®

TWIN RIGHT
ANGLE
PLUG FOR PCB

D4S20W-40MA5-Y



All dimensions are in mm; tolerances according to ISO 2768 m-H
EMC-screening must be assured by chassis compartment. Control box manufacturer is responsible for EMC-screening.

Interface

According to RN 059-02

Documents

Pinning instruction RN 053-01
Panel piercing MB 427
Test Specification RN 061-01
Tape and reel packaging VG226.13500

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

RF_35/05.10/6.2

RosenbergerHSD®

TWIN RIGHT
ANGLE
PLUG FOR PCB

D4S20W-40MA5-Y

Material and plating

Connector parts

Center contact

Material

Spring bronze

Plating

Gold, 0.15 µm (Interface)

Outer contact (Interface)

Brass

Tin, 0.5-2 µm (PCB)

Outer contact (PCB)

Zinc Alloy

Nickel, 3-6 µm

Dielectric

LCP

Tin, 2-8 µm, over nickel

Plastic housing

HTN

Electrical data

Impedance, differential mode

100 Ω differential signalling, for one pair or quad cable shielded

Frequency

DC to 2.0 GHz

Return loss

≥ 20 dB to 1.0 GHz

≥ 17 dB to 2.0 GHz

Insertion loss

≤ 0.1 dB @ 1.0 GHz

Skew (between signal contacts)

≤ 5 psec.

Nearend-Crosstalk

≤ 30 dB

Farend-Crosstalk

≤ 35 dB

Insulation resistance

≥ 1x10³ MΩ

Signal contact resistance

≤ 10 mΩ

Outer contact resistance

≤ 7.5 mΩ

Test voltage

250 V rms

Working voltage

100 V rms

Power current

≤ 1.5 A DC

RF-leakage (shielding effectiveness)

≥ 75 dB up to 1 GHz (IEC 62153-4-7)

≥ 65 dB up to 2 GHz (IEC 62153-4-7)

Mechanical data

Mating cycles

≥ 25

Engagement force each contact

≤ 30 N

Disengagement force each contact

≥ 5 N

Retention force latch

≥ 110 N

Coding efficiency

≥ 80 N

Environmental data

Temperature range

-40°C to +105°C

Thermal shock

DIN IEC 60068-2-14 Test Na

Temperature and humidity

USCar 2 – 4 5.6.2

Vibration (Random)

DIN IEC 60068-2-64

Mechanical Shock

DIN IEC 60068-2-27

High-Temp. Exposure

DIN IEC 60068-2-2

Soldering profile

acc. to IEC 60068-2-58; Group 3&4

RoHS

compliant



Packing

Standard

25 pcs in Blister; 135 pcs on tape & reel

Weight

11.8 g/pce

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

RF_35/05.10/6.2

Technical Data Sheet

Rosenberger







RosenbergerHSD®

TWIN RIGHT
ANGLE
PLUG FOR PCB

D4S20W-40MA5-Y

Coding

Part Number has to be accomplished by codification

Additional coding	Plug	Colour	RAL	Part-Number
A		deep black	sim. 9005	D4S20W-40MA5-A
B		cream	sim. 9001	D4S20W-40MA5-B
C		signal blue	sim. 5005	D4S20W-40MA5-C
D		claret violet	sim. 4004	D4S20W-40MA5-D
E		leaf green	sim. 6002	D4S20W-40MA5-E
F		nut-brown	sim. 8011	D4S20W-40MA5-F
Z		waterblue	sim.5021	D4S20W-40MA5-Z

Change History

Rev.	Date	Change
b00	24.07.13	Environmental data specification changed from "2002/95/EC (RoHS)" to "RoHS" Position of center of gravity added in drawing
c00	21.01.16	Add of "quality inspection marking"
d00	25.08.16	Placed quality inspection marking in center

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
T. Höfling	02.08.12	S. Mysyk	25.08.16	d00	16-1448	T. Stockhammer	25.08.16

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel. : +49 8684 18-0
Email : info@rosenberger.de

Page
3 / 3