



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





D200 Series

High Power 200W reed relay with 7kV isolation



- 200W switching power
- 7kV Isolation across contacts
- Low Contact Resistance
- PCB Mount
- Excellent AC characteristics

The D200 series combines a high power 200W switching capacity with isolation of 7kV across the contacts.


This switching performance is achieved through the use of high vacuum reed switches with Tungsten contacts and make these relays suitable for high reliability applications, such as test equipment and high voltage power supplies.

These are PCB Mount relays, though custom options may be available on request.


Contact Specification	Unit	Condition
Switch Action		SPNO
Contact Material		Tungsten
Isolation across contacts	kV DC or AC peak	7
Switching Power Max.	W resistive	200
Switching Voltage Max.	V DC or AC peak	2500
Switching Current Max.	A DC or AC peak	3
Carry Current Max.	A DC or AC peak	5
Capacitance across contacts	pF coil to screen grounded	0.8 typ
Lifetime operations	dry switching	10 ⁹
	50W switching	10 ⁶
Contact Resistance	mΩ max (typical)	600
Insulation Resistance	Ωmin (typical)	(10 ¹³)
Coil Specification		5V 12V 24V
Must Operate Voltage	V DC	3.75 9 20
Must Release Voltage	V DC	0.5 1.25 4
Operate Time	ms diode fitted	6.0 6.0 6.0
Release Time	ms diode fitted	1.0 1.0 1.0
Resistance	Ω	28 150 780
Relay Specification		
Isolation contact/coil	kV	17
Insulation resistance contact to all terminals	Ωmin (typical)	10 ¹⁰ (10 ¹³)
Environmental Operating Temp range	°C	20 to +70
Standard Parts		Coil Voltage Vdc
DAT200-05		5
DAT200-12		12
DAT200-24		24

Please refer to this document for circuit design notes:-
<http://www.cynergy3.com/blog/application-notes-reed-relays-0>

Mechanical Dimensions

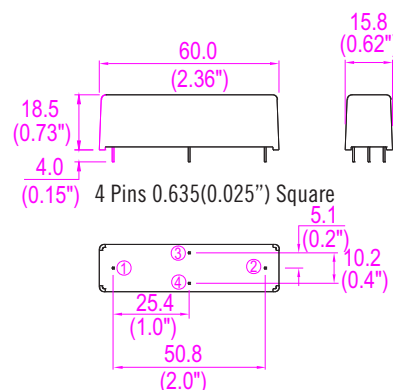

CIRCUIT DIAGRAM



Cynergy3 Components Ltd.
 7 Cobham Road
 Ferndown Industrial Estate
 Wimborne, Dorset BH21 7PE
 Telephone +44 (0) 1202 897969

Email: sales@cynergy3.com

ISO9001 CERTIFIED

D200 2016

www.cynergy3.com