

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







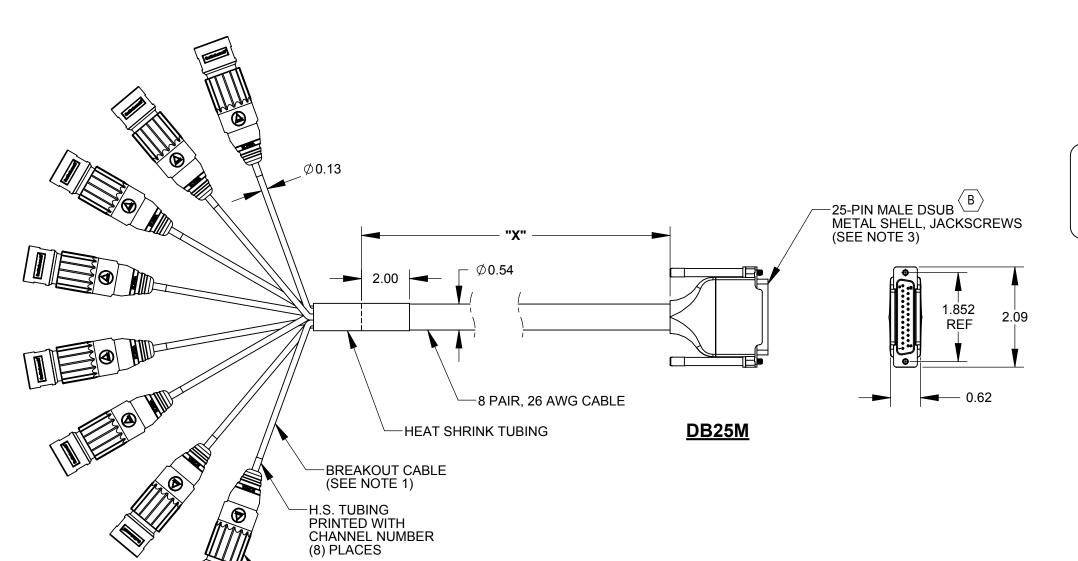

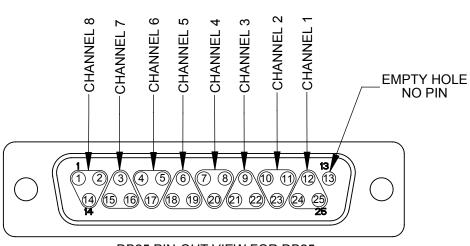

## **DB25 PIN-OUT VIEW FOR DB25**

DB25 AND XLRM WIRING CHART										
XLR	CABLE	PIN 2	PIN 3	PIN 1						
(CHANNEL)	(COLOR)	(RED)	(BLACK)	(BARE)						
1	BROWN	24	12	25 11						
2	RED	10	23							
3	ORANGE	21	9	22						
4	YELLOW	7	20	8						
5	GREEN	18	6	19						
6	BLUE	4	17	5						
7	PURPLE	15	3	16						
8	GRAY	1	14	2						

PART NO.	CABLE LENGTH "X"		
DB25M02XLRM	2.00 FT +/- 1.50 IN		
DB25M03XLRM	3.00 FT +/- 1.50 IN		
DB25M10XLRM	10.00 FT +/- 1.50 IN		

DB25M TO 8 XLR MALES, RoHS

## NOTES:

1. BREAKOUT CABLE LENGTH: 18.00 +/- 0.75 INCHES. SEE TABLE FOR COLOR.

3-PIN XLR MALE (8) PLACES

- $\langle$  B  $\rangle$  2. THIS PRODUCT COMES COILED AND PACKAGED IN BAG.
- (B) 3. JACKSCREWS ARE SHIPPED UNASSEMBLED. CABLE COMES WITH BOTH #4-40 THREAD (2) AND #M3 THREAD (2) JACKSCREWS.
- $\langle B \rangle$  4. MATERIALS:

XLR MALE CONNECTOR: HANDLE - ZINC ALLOY, NICKEL PLATED HOUSING - ZINC ALLOY, NICKEL PLATED INSULATOR - THERMOPLASTIC, GREEN CONTACT PINS - COPPER ALLOY, SILVER PLATED H.S. TUBING - THERMOPLASTIC DSUB - COPPER ALLOY, NICKEL PLATED WITH GOLD PINS JACKSCREWS - STAINLESS STEEL

5. THIS PRODUCT IS RoHS COMPLIANT.

					UNLES
					1. ALL DIME
					- TWO PL
С	26795	7-8-11	то	TJK	- THREE P
В	26637	10/11/10	RS	TJK	
Α	25716	10/03/07	JGK	TJK	
					i

ECO NUMBER

**REVISIONS** 

SS OTHERWISE SPECIFIED ENSIONS IN INCHES LACE DECIMALS ±0.02 PLACE DECIMALS ±0.005 DATE BY APVD

DO NOT SCALE DRAWING

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY. TEMPER SIZE **FINISH** MATERIAL FIRST USED ON SCALE 2:1 DATE DRAWN CHKD APVD TJK RS **JGK** 9/12/06 11/29/10 11/29/10 SHEET 1 OF

PART No.

(CUSTOMER DRAWING)

DB25M XLRM

REV

SolidWorks CAD File B