

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

- Unmatched performance thanks to dual ARM Cortex-A9 @ 800MHz
- All memories you need: on-board NOR and NAND Flash
- Enabling smarter system thanks to Artix-7 FPGA integrated on chip
- FPGA banks wide range PSU input from 1.2V to 3.3V
- Highest security and reliability: internal voltage monitoring and power good enable
- Reduced carrier complexity: dual CAN, USB, Ethernet GB and native 3.3V I/O
- Easy to fit thanks to its small form factor
- Accurate timing application thanks to on-board 5ppm RTC

BORA is the new top-class Dual Cortex-A9 + FPGA CPU module by DAVE Embedded Systems, based on the recent Xilinx Zynq XC7Z010/XC7Z020 application processor. Thanks to BORA, customers are going to save time and resources by using a compact solution that includes both a CPU and an FPGA, avoiding complexities on the carrier PCB.

The use of this processor enables extensive system-level differentiation of new applications in many industry fields, where high-performance and extremely compact form factor (85mm x 50mm) are key factors. Smarter system designs are made possible, following the trends in functionalities and interfaces of the new, state-of-the-art embedded products.

BORA offers great computational power, thanks to the rich set of peripherals, the Dual Cortex-A9 and the Artix-7 FPGA together with a large set of high-speed I/Os (up to 5GHz).

BORA

XILINX ZYNQ XC7Z010/XC7Z020 CPU MODULE




BORA enables designers to create rugged products suitable for harsh mechanical and thermal environments, allowing for the development of the most advanced and robust products.

Thanks to the tight integration between the ARM-based processing system and the on-chip programmable logic, designers are free to add virtually any peripheral or create custom accelerators that extend system performance and better match specific application requirements.

BORA is designed and manufactured according to DAVE Embedded Systems UL TRA Line specifications, in order to guarantee premium quality and technical value for customers who require top performances and flexibility.

BORA is suitable for high-end applications such as medical instrumentation, advanced communication systems, critical real-time operations and safety applications.

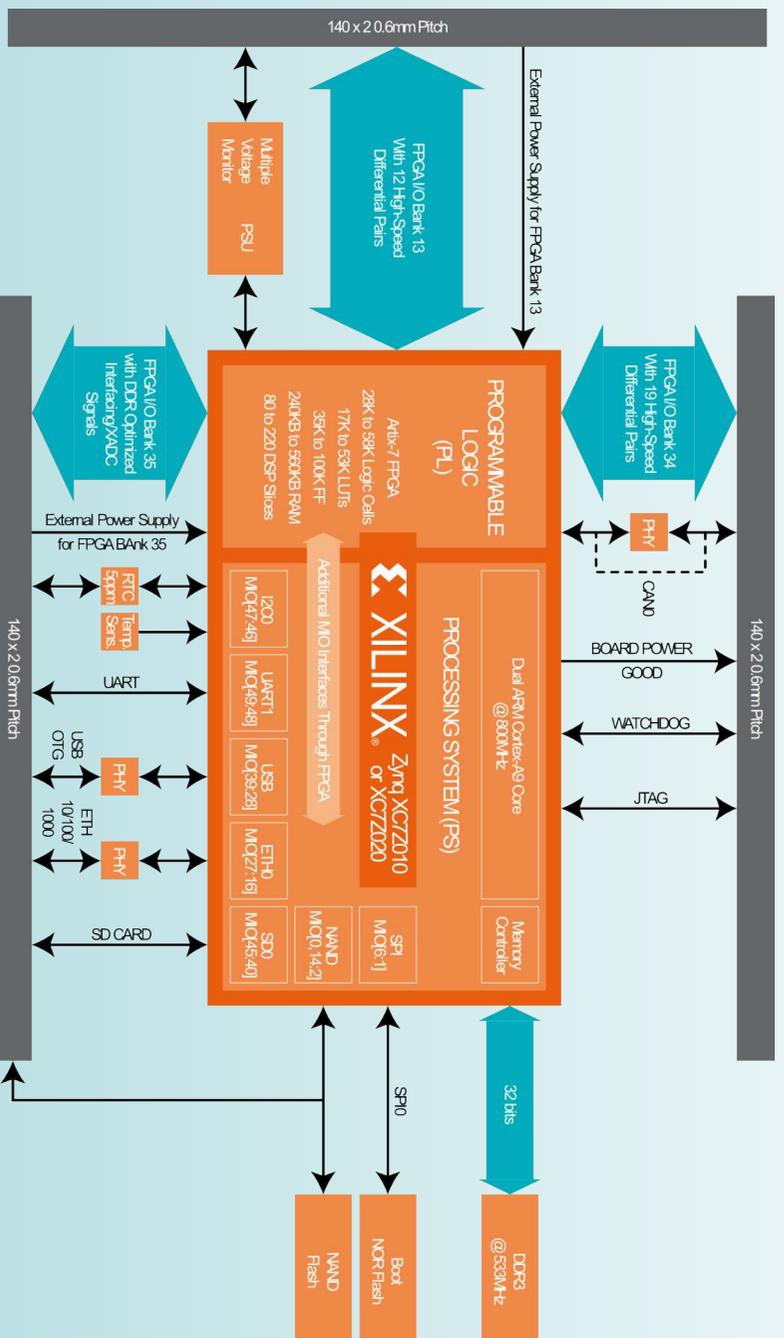

CPU Xilinx Dual ARM Cortex-A9 Zynq XC7Z010/XC7Z020 @ 800MHz

Supervisor On-board power supply supervision and power sequencer
Watchdog and RTC

Memory

Cache 32Kbyte instruction, 32Kbyte data, 512Kbyte L2 for each core

SDRAM Up to 1GB DDR3 @ 533MHz

NOR Bootable SPI NOR 8, 16, 32 MB

NAND All sizes, on request

SRAM 256 Kbyte

Interfaces (full-spec models) *

LAN Ethernet 10/100/1000 Mbps
Additional RMII interface

UART up to 2x UART ports

USB up to 2 x 2.0 OTG ports

CAN up to 2 x CAN

Debug JTAG IEEE 1149.1 Test Access Port
CoreSight™ and Program Trace Macrocell (PTM)

Other PC Card: 2 x SD/SDIO 2.0/MMC 3.31 compliant controllers
up to 6 x I²C channels
up to 6 x SPI channels
GPIOs available

FPGA

Model Artix-7

Logic Cells 28K to 56K

LUTs 17K to 53K

Flip Flops 35K to 100K

RAM 240KB to 560KB

DSP Slices 80 to 220

Differential Pairs up to 34 differential pairs for high freq. interfaces

Mechanical

Connectors 3 x 140 pin 0.6mm pitch

Size 85mm x 50mm

Temperature Commercial (0°C / +70°C)
Industrial (-40°C / +85°C)

PSU

Input 3.3V, on-board voltage regulation

Software


Bootloader U-Boot

Multitasking Linux 3.x.x

Evaluation Kit


The BORA evaluation kit is available in a development kit that includes a SOM, a carrier board and all accessories required for immediate start-up.

*: interface availability depends on pin multiplexing.
Please contact your local FAE.

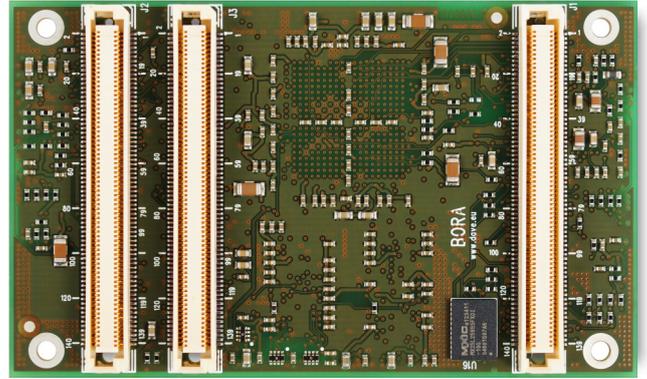

Product code configurator *

Family	Processor	NOR flash	DDR RAM	NAND flash	BOOT	Temp. range
DBR	A: XC7Z010-1	0= 0MB	1= 1GB	0= 0MB	0 = Nor Boot	C: Commercial temp.
	B: XC7Z010-2	3= 8MB	9= 512MB	1= 1024MB		
	C: XC7Z010-3	5= 32MB		2= 2048MB	0 / +70°C	
	D: XC7Z020-1	6= 64MB		7= 128MB	I: Industrial temp.	
	E: XC7Z020-2			8= 256MB	-40 / +85°C	
	F: XC7Z020-3			9= 512MB		

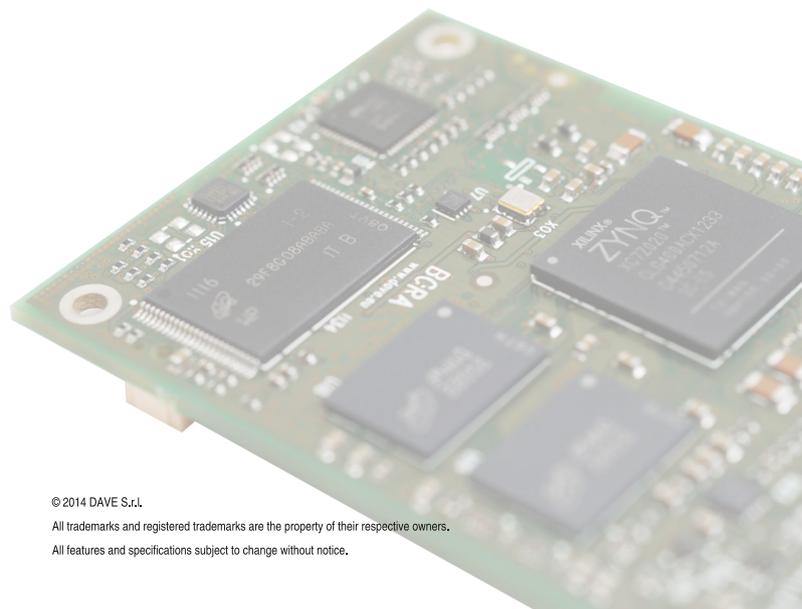

© 2014 DAVE S.r.l.
All trademarks and registered trademarks are the property of their respective owners.
All features and specifications subject to change without notice.



DAVE S.r.l.
Via Talponedo, 29/A
33080 Porcia (PN) - ITALY
Ph +390434921215
Fax +3904341994030

www.dave.eu
wiki.dave.eu
sales@dave.eu
support-bora@dave.eu