



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





DEVICE SERVER
MODULE



DIGI CONNECT ME®

Secure device server module with plug-and-play functionality and professional development tools for custom applications


The Digi Connect ME is a secure device server module that delivers complete and versatile embedded IPv6-ready network connectivity and strong standards-based encryption services such as SSL/SSH. Built on leading Digi 32-bit NET+ARM technology, the Digi Connect ME is cost effective and easy to use in existing and new product designs, while powerful enough to meet future product performance needs. The connector-style module is pin-compatible and interchangeable with the Digi Connect® Wi-ME, providing a direct migration path to a wireless solution without the traditional complexities of hardware and software integration work.

Digi Connect ME is available pre-loaded with Digi plug-and-play firmware, which eliminates software development efforts by providing powerful and configurable IPv4/IPv6 device server functionality, including an easy-to-use web user interface and security features. Target applications include retail systems, security/access control, medical devices and building/industrial automation.

BENEFITS

- Compact and secure 32-bit device server modules
- Complete family of pin-compatible module solutions
- Integrated 10/100 Mbit Ethernet interface
- Strong enterprise-grade network security
- Highly integrated low emission design (FCC Class B)
- Extended and industrial operating temperature
- Digi processor and WLAN technology for true long-term availability

BLOCK DIAGRAM

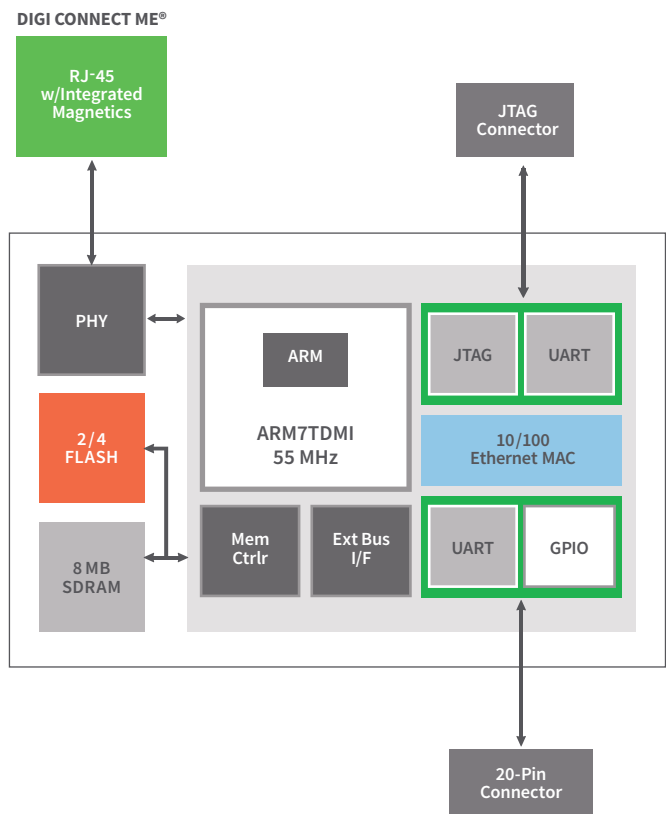

RELATED PRODUCTS



Digi Connect®
ME/Wi-ME
9210




ConnectCore®
9P 9215



ConnectCard™
for i.MX28



XBee®



Development
Kits

DIGI JUMPSTART KIT® OVERVIEW

PLUG-AND-PLAY INTEGRATION KITS

Digi Integration Kits provide everything needed for evaluation, rapid prototyping and integration of Digi Connect device server modules using the feature-rich Digi plug-and-play device server firmware. They deliver fully transparent wired and wireless serial-to-network functionality and allow you to quickly network-enable your existing and new product designs.

Digi plug-and-play firmware offers industry-leading features such as a robust IPv6-ready TCP/IP stack, fully-featured serial tunneling, Modbus/TCP, web user interface with private labeling/branding options, user management, file system, SSL/TLS, SSH, Modbus/TCP, intelligent device management via SNMP, configurable e-mail alarms, and patented RealPort® COM/TTY port redirection.

- Complete kit for product evaluation, rapid prototyping, and integration
- Digi plug-and-play firmware eliminates embedded software development
- Transparent wired and wireless device server functionality
- Full private-labeling/branding supported out-of-the-box



DIGI JUMPSTART KIT® FOR NET+OS®

This royalty-free turnkey solution for embedded software development is based on the ThreadX Real-Time Operating System (RTOS), one of the most reliable and field-proven RTOS solutions available. In addition to ThreadX, NET+OS provides the integrated building blocks needed to create product solutions with leading network security using Digi embedded modules and microprocessors.

For professional NET+OS software development, the Microsoft Windows based Digi ESP™ Integrated Development Environment (IDE), with graphical user interface and a high-speed USB 2.0 hardware debugger, is provided out-of-the-box.

- Royalty-free turnkey solution for embedded software development
- Built on field-proven and compact ThreadX RTOS
- Fully integrated support for secure, IPv4/IPv6 networking applications
- Professional software development using Windows-based Digi ESP IDE



| SOFTWARE PLATFORM | DIGI PLUG-AND-PLAY DEVICE SERVER FIRMWARE | NET+OS® |
|--------------------------|--|--|
| MODULE | Digi Connect ME w/ 2 MB Flash, 8 MB SDRAM | |
| DEVELOPMENT BOARD | 1 RS-2323 serial port, GPIO configuration switches, Screw terminal for GPIO signals, Prototyping area, Status LEDs (serial, GPIO, power), Logic signal header, Test points, Reset button, User buttons, PoE module header, 9-30VDC power supply, JTAG header and RS-232 console/debug port for JTAG-equipped modules | |
| CD/DVD | Digi Connect Integration Kit CD: Device discovery tool w/source code, Device discovery library, Java applet sample source code, C/C++ samples, (TCP, UDP, SSL) | Digi NET+OS CD: NET+OS 7, Digi ESP IDE, BSP source code, Sample code, Green Hills MULTI IDE support files, User documentation |
| DOCUMENTATION | Getting started, Hardware reference manual, Development board schematics Digi Connect user's guide, Command line reference, RCI specification | Quick start guide, Digi ESP tutorial, NET+OS porting guide, NET+OS API documentation, Advanced Web Server, Hardware reference manual, Development board schematics |
| POWER SUPPLIES | External wall power supply (110/240 VAC to 12 VDC @ 850 mA) with interchangeable outlet adapters (North America, EU, UK, and Australia) | |
| ACCESSORIES | Crossover serial cable, Ethernet cable | |
| OTHER | - | Digi JTAG link USB 2.0 hardware debugger |

Please refer to the feature specs on our website for detailed information about the specific software platform capabilities.

SPECIFICATIONS

Digi Connect ME®

HARDWARE

| | |
|---------------------------------|--|
| PROCESSOR TYPE | 32-bit Digi NS7520 processor |
| ARM CORE | ARM7TDMI |
| PROCESSOR SPEED | 55 MHz |
| MEMORY BASE POPULATION | 2/4 MB NOR flash |
| | 8 MB SDRAM |
| PINS/FORM FACTOR | RJ-45 connector style with 20-pin micro pin header (Samtec FTS-110-01-F-DV-TR) |
| HIGH-SPEED TTL SERIAL INTERFACE | Up to 230 Kbps data rate; Full signal support for TXD, RXD, RTS, CTS, DTR, DSR and DCD; Hardware/Software flow control |
| GPIO | Up to 10 shared with 1 external IRQ |
| ON-MODULE POWER SUPERVISOR | Yes |
| JTAG INTERFACE | NET+OS development modules only |
| WAVE-SOLDERABLE DESIGN | No clean flux process |
| DIMENSIONS (L X W X H) | 1.445 in (36.7 mm) x 0.75 in (19.05 mm) x 0.854 in (21.69 mm) |

NETWORK INTERFACE - WIRED

| | |
|-----------------------------|---|
| STANDARD | IEEE 802.3 |
| PHYSICAL LAYER | 10/100Base-T |
| DATA RATE | 10/100 Mbps (auto-sensing) |
| MODE | Full- or half-duplex (auto-sensing) |
| CONNECTOR | RJ-45 |
| INTEGRATED ETHERNET MAC/PHY | Yes |
| POE POWER PASS-THROUGH | Yes (see website for available options) |

ENVIRONMENTAL

| | |
|-----------------------|---------------------------------------|
| OPERATING TEMPERATURE | -40° C to +85° C (-40° F to +185° F) |
| STORAGE TEMPERATURE | -50° C to +125° C (-58° F to +257° F) |
| RELATIVE HUMIDITY | 5% to 90% (non-condensing) |
| ALTITUDE | 12,000 feet (3,658 meters) |

POWER REQUIREMENTS (3.3V)


| | |
|---------|-----------------|
| MAXIMUM | 270 mA (891 mW) |
|---------|-----------------|

REGULATORY APPROVALS


| | |
|--|-----|
| FCC PART 15 CLASS B, EN 55022 CLASS B | Yes |
| EN 61000-3-2 AND EN 61000-3-3 | Yes |
| ICES-003 CLASS B, VCCI CLASS II, AS 3548 | Yes |
| FCC PART 15 SUB C SECTION 15.247 | Yes |
| IC RSS-210 ISSUE 5 SECTION 6.2.2(O) | Yes |
| EN 300 328, EN 301 489-17 | Yes |
| UL 60950-1, EN 60950 (EU) | Yes |
| CSA C22.2, NO. 60950 | Yes |
| EN 55024 | Yes |

PRODUCT DIMENSIONS

Digi Connect ME® - Side

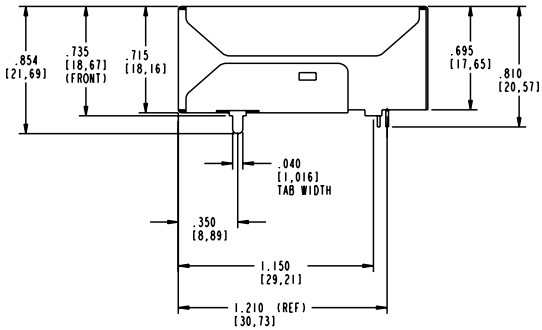

Recommended PCB Layout

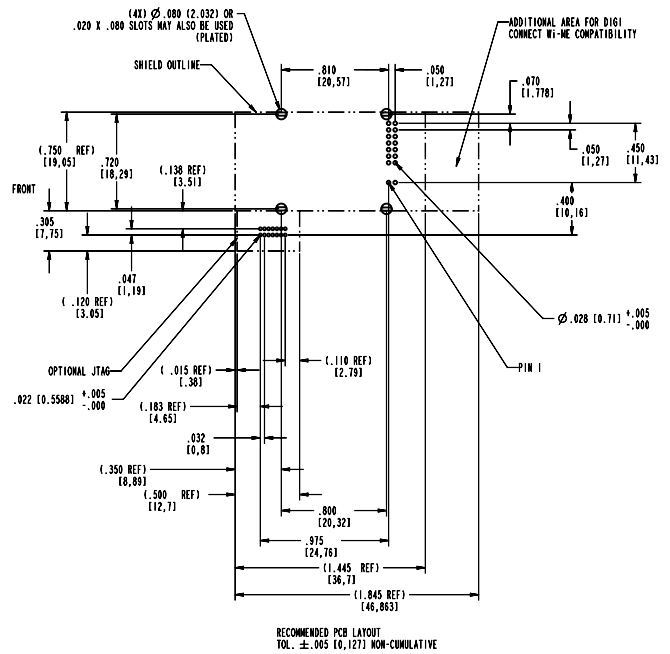

| PART NUMBERS | DESCRIPTION |
|--|---|
| KITS | |
| DC-ME-NET | Digi Connect ME Digi JumpStart Kit for NET+OS 7 w/Eclipse-based Digi ESP IDE, USB debugger, installation and setup support package |
| DC-ME-KT | Digi Connect ME Integration Kit - Includes module w/plug-and-play firmware, development board, documentation, Integration CD, cables and power supply |
| MODULES FOR NET+OS | |
| DC-ME-01T-C | Digi Connect ME w/2 MB Flash, 8 MB RAM (single-unit pack) |
| DC-ME-01T-PC | Digi Connect ME w/2 MB Flash, 8 MB RAM, 802.3af compliant power pass-thru (single-unit pack) |
| DC-ME4-01T-C | Digi Connect ME w/4 MB Flash, 8 MB RAM (single-unit pack) |
| MODULES WITH PLUG-AND-PLAY FIRMWARE | |
| DC-ME-01T-PS | Digi Connect ME w/2 MB Flash, 8 MB RAM, 802.3af compliant power pass-thru (single-unit pack) |
| DC-ME-01T-S | Digi Connect ME w/2 MB Flash, 8 MB RAM (single-unit pack) |
| DC-ME4-01T-S | Digi Connect ME w/4 MB Flash, 8 MB RAM (single-unit pack) |

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2015 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001258
F1/915

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn

